

# LED FIXTURE

## SSL Series



### LED Mini Flood SSL-MFL

Enhanced LED performance in a classic design  
Multiple kelvin selection



5-year limited warranty

Operating temperature range -40° C ~ +45° C



Knuckle mount




Trunnion mount

#### Features & Benefits

- cULus listed, DLC
- Switchable CCT (30K/40K/50K)
- Optional installation of knuckle and trunnion mount
- 120V, CRI $\geq$ 70
- Dark bronze coat finish
- L70 @ 50,000 Hrs
- IP 65, wet location rated

#### Dimensional Drawing

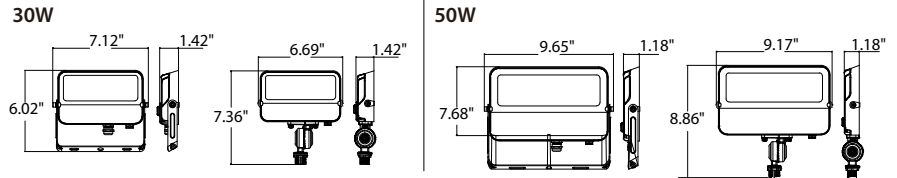

#### Ordering Information Example: SSL-MFL/30W/MK/120V/DB/KNC

Family Name	Fixture Type	Wattage	CCT (Kelvin)	Voltage	Finish	Mounting
SSL (Solid state lighting)	MFL (LED mini flood)	30W 50W	MK (Multi Kelvin/CCT)	120V	DB (Dark bronze)	KNC (Knuckle mounting) TRU (Trunnion mounting)

#### Product Specification

Ordering Code	DLC	Model Number	Wattage (W)	Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	Optics/ Distribution	CCT (K)	CRI	Wet Location	Case QTY.
3664153	Y	SSL-MFL/30W/MK/120V/DB/KNC	30	120V	50,000	3150	90° x 120°	30-40-50	$\geq$ 70	Yes	24
3664154	Y	SSL-MFL/30W/MK/120V/DB/TRU	30	120V	50,000	3150	90° x 120°	30-40-50	$\geq$ 70	Yes	24
3665170	Y	SSL-MFL/50W/MK/120V/DB/KNC	50	120V	50,000	5250	90° x 120°	30-40-50	$\geq$ 70	Yes	16
3665171	Y	SSL-MFL/50W/MK/120V/DB/TRU	50	120V	50,000	5250	90° x 120°	30-40-50	$\geq$ 70	Yes	16