

# LED FIXTURE

SSL Series



## LED Glass Wall Pack SSL-WP1T

Glass lens, 120-347V auto-sensing driver  
Selectable wattage and selectable kelvin selection



5-year limited warranty


Operating temperature range -40°C ~ +40°C



### Features & Benefits

- cULus listed, DLC Premium
- 120-347V auto sensing driver, 0-10V dimming
- Selectable CCT (30K/40K/50K), selectable wattage
- Junction box or wall mounted directly
- Die-cast aluminum with durable dark bronze or black coat finish
- Photocell sensor optional
- L70 @ 50,000 Hrs, CRI≥80
- IP 65, wet location rated

### Dimensional Drawing

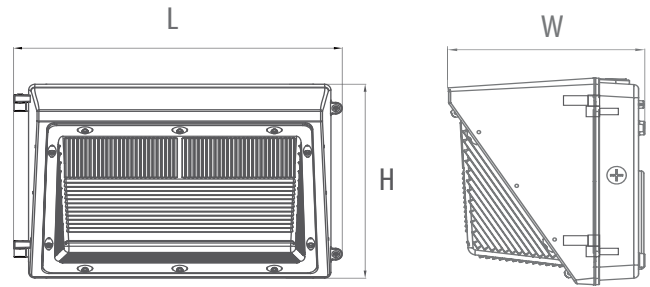

### Ordering Information Example: SSL-WP1T/60M/MW/MK/120-347V/D/DB

| Family Name                | Fixture Type               | Wattage  | CCT                        | Voltage  | Dimmable     | Finish                          | Options   |
|----------------------------|----------------------------|--|----------------------------|----------|--------------|---------------------------------|-----------|
| SSL (Solid state lighting) | WP1T (LED glass wall pack) | 40W<br>60M/MW (Max. 60W Selectable Wattage)<br>100L/MW (Max. 100W Selectable Wattage)<br>120XL/MW (Max. 120W Selectable Wattage) | MK (Selectable Kelvin/CCT) | 120-347V | D (Dimmable) | DB (Dark bronze)<br>BLK (Black) | Photocell |

### Product Specification

| Ordering Code | DLC Premium | Model Number                       | Wattage (W)                                    | Input Voltage (V) | Hour Rating | Initial Delivered Lumens (lumen) | CCT (K)  | CRI | Wet Location | Dimension L×W×H(inch) | Case QTY. |
|---------------|-------------|------------------------------------|--|-------------------|-------------|----------------------------------|----------|-----|--------------|-----------------------|-----------|
| 3665318       | -           | SSL-WP1T/40W/MK/120-347V/D/DB      | 40   | 120-347V          | 50,000      | 5000                             | 30-40-50 | ≥80 | Yes          | 14.3"×9"×7.8"         | 2         |
| 3665319       | -           | SSL-WP1T/40W/MK/120-347V/D/BLK     | 40   | 120-347V          | 50,000      | 5000                             | 30-40-50 | ≥80 | Yes          | 14.3"×9"×7.8"         | 2         |
| 3680304       | Y           | SSL-WP1T/60M/MW/MK/120-347V/D/DB   | 60-40-28                                       | 120-347V          | 50,000      | 7200-4800-3360                   | 30-40-50 | ≥80 | Yes          | 14.3"×9"×7.8"         | 2         |
| 3680305       | Y           | SSL-WP1T/100L/MW/MK/120-347V/D/DB  | 100-90-80-70                                   | 120-347V          | 50,000      | 12000-10800-9600-8400            | 30-40-50 | ≥80 | Yes          | 14.3"×9"×7.8"         | 2         |
| 3680359       | Y           | SSL-WP1T/120XL/MW/MK/120-347V/D/DB | 120-100-75                                     | 120-347V          | 50,000      | 15000-12500-9375                 | 30-40-50 | ≥80 | Yes          | 14.3"×9"×7.8"         | 2         |
| 3660183       | -           | SSL-WP2T/LV/12V/PC                 | SSL, Low Voltage, 12V, Photocell (Button Type) |                   |             |                                  |          |     |              |                       |           |

SSL-WP2T/LV/12V/PC

