

# LED FIXTURE

RIGID Series



## LED Flush Mount-2 Ring RGD-FM/2 Ring

LED 2 ring round ceiling light  
Multiple wattage and multiple kelvin selection



5-year limited warranty

Operating temperature range -20° C ~ +40° C



Sensor built-in

### Features & Benefits

cUL/ cETLus rated, Energy Star

Size 14" and 18" available

CRI >90\*, 120° beam spread

TRIAC dimmable down to 10%

Microwave sensor optional, 100% to preset 30% dim


L70@50,000 Hrs, Non-IC rated

Brushed Oxidation finish, PMMA opal lens

Wet location rated\*

\*For applicable models, see product specification below

### Dimensional Drawing

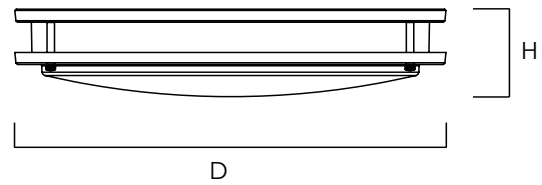

	M.O.D.	M.O.H.
RGD-FM14	14"	3.8"
RGD-FM18	18"	3.8"

### Ordering Information Example: RGD-FM14/MW/MULTI-K/D/2R

Family Name	Fixture Type	Wattage	CCT (Kelvin)	Dimmable Option	Body
RGD (Rigid)	FM14 (LED 14" flush mount 2 ring) FM18 (LED 18" flush mount 2 ring)	MW (Multiple Wattage) 21W 32W	MULTI-K (3 CCT Multiple Kelvin) 30 (3000K) 40 (4000K)	D (Dimmable) S (Microwave sensor)	2R (2 Ring)

### Product Specification

Ordering Code	Energy Star	cUL/ cETLus	Model Number	Description	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Damp / Wet Location	M.O.D. (Inch)	Dimmable	Option Sensor	Case QTY.
3680100	Y	cETLus	RGD-FM14/MW/MULTI-K/D/2R	14" 22-18-15W 30-40-50K 2 ring	22-18-15	120	54,000	1540-1260-1000	30-40-50	90	Wet	14	Y	-	6
3680101	Y	cETLus	RGD-FM18/MW/MULTI-K/D/2R	18" 32-28-24W 30-40-50K 2 ring	32-28-24	120	54,000	2240-1960-1680	30-40-50	90	Y	18	Y	-	4
3664120	Y	cUL	RGD-FM14/21W/30/S/2R	14" 21W 3000K 2 ring, with sensor	21	120	50,000	1470	3000	80	Y	14	N	Y	6
3664121	Y	cUL	RGD-FM14/21W/40/S/2R	14" 21W 4000K 2 ring with sensor	21	120	50,000	1500	4000	80	Y	14	N	Y	6
3664129		cUL	RGD-FM18/32W/MULTI-K/D/2R	18" 32W 30-40-50K 2 ring	32	120	50,000	2400	30-40-50	80	Y	18	Y	-	4

Sensor adjustment: Default sensor setting: sensitivity 50%, hold-time 90s, daylight sensor disable.

