

# LED Cylinder



<b>SSL-ESC</b>	<b>Segment</b>	<b>Wattage Range</b>	<b>Lumen Range</b>
	Commercial & Residential	Selectable Wattage (10W-40W)	1,050-2,100lm

## Features

- Pressure Die Cast Aluminum housing for better Thermal Management.
- IP65 Wet Location rated with operating temperature range of -40 °C ~ +40 °C.
- Field Selectable CCT (3000K, 4000K & 5000K) along with 120-347V LED Auto-Sensing driver.
- Available in 45° beam angle (option of 25° & 60° beam angle) with Field Selectable Multi-wattage variant.

## Specifications

### Housing:

Black Finish Pressure Die Cast Aluminum Body for better Thermal Management.

### Optics:

Premium Grade PC Lens with Glass Cover.

### Mounting:

Ceiling, Wall and Pendant mounting options.

### Driver:

120-347V LED Auto-Sensing driver with Operating temperature range of -40 °C ~ +40 °C.

### LED:


Field Selectable CCT of 3000K, 4000K & 5000K. Efficacy of  $\geq 105\text{lm/w}$ .

### Controls:


Compatible with 0-10V Dimming



## Dimensional Drawing

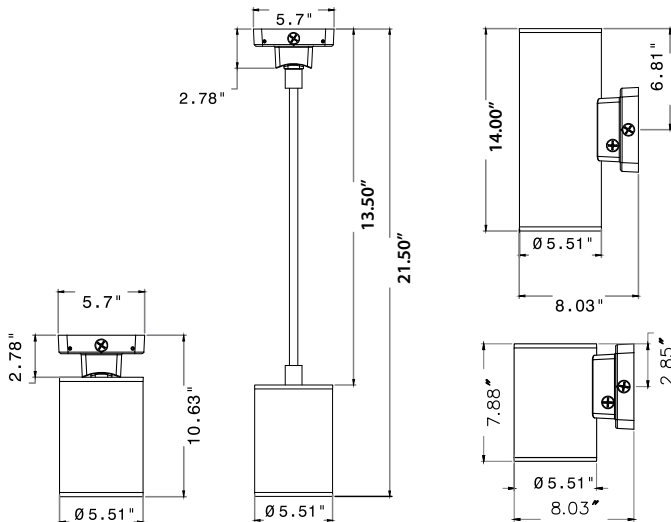

## Polar Candela

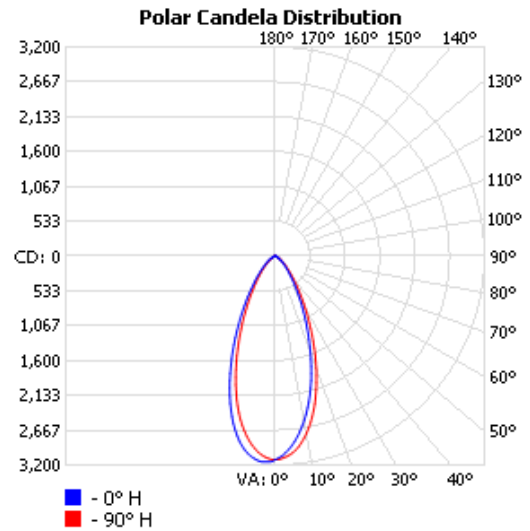

## Applications



Residences



Hotels



Restaurants



Malls

# LED Cylinder



<b>SSL-ESC</b>	<b>Segment</b>	<b>Wattage Range</b>	<b>Lumen Range</b>
	Commercial & Residential	Selectable Wattage (10W-40W)	1,050-2,100lm

## Ordering Information SSL-ESC/W/20W/MK/120-347V/45D/BK

Family Name	Fixture Type	Mounting	Wattage	CCT	Voltage	Beam Angle*	Finish Color
SSL (Solid state lighting)	ESC (LED cylinder)	C (Ceiling Mtd.) P (Pendant Mtd.) W (Wall Mtd.) WUD (Wall Mtd. up/ down)	20W-10W 40W-20W (WUD)	MK (Selectable Kelvin/CCT)	120-347V	45D (45° Default) 25D, 60D (25°, 60° Optional)	BK (Black)
						* ESC/WUD, 45° up/ 45° down	

## Product Information

Ordering Code	DLC	Model Number	Wattage (W)	Voltage (V)	Hour Rating	Lumens (lm)	CCT (K)	CRI	Wet Location	Mounting	Case QTY.
3680330	Y	SSL-ESC/W/20W/MK/120-347V/45D/BK	20-10	120-347V	50,000	2100-1050	30-40-50	≥70	Yes	Wall Mtd.	4
3680331	Y	SSL-ESC/C/20W/MK/120-347V/45D/BK	20-10	120-347V	50,000	2100-1050	30-40-50	≥70	Yes	Ceiling Mtd.	4
3680332	Y	SSL-ESC/P/20W/MK/120-347V/45D/BK	20-10	120-347V	50,000	2100-1050	30-40-50	≥70	Yes	Pendant Mtd.	4
3680333	-	SSL-ESC/WUD/20W/MK/120-347V/45D/BK	40-20	120-347V	50,000	2100 UPD/ 1050 UPD	30-40-50	≥70	Yes	Wall Mtd. up/ down	4
3660207	-	SSL-ESC/LENS/25D	25° lens								
3660209	-	SSL-ESC/LENS/60D	60° lens								

## Related Products



RGD-CDR



RGD-CHY2



PRO-SP5



RGD-HS