


# LED Wall Pack Light



<b>SSL-WP1TS</b>	<b>Segment</b>	<b>Wattage Range</b>	<b>Lumen Range</b>
	Commercial & Residential	Selectable Wattage (30W-120W)	3,900-15,600lm

## Features

- Aesthetically Designed Compact Wallpack with Glass diffuser for long life & trouble free operation.
- IP65 rated with operating temperature range of -40 °C ~ + 45 °C.
- Field Selectable CCT 3000K, 4000K & 5000K
- Efficacy of  $\geq 130$  lm/W with  $\geq 80$  CRI.
- Integral Photocell included (on/off switchable)

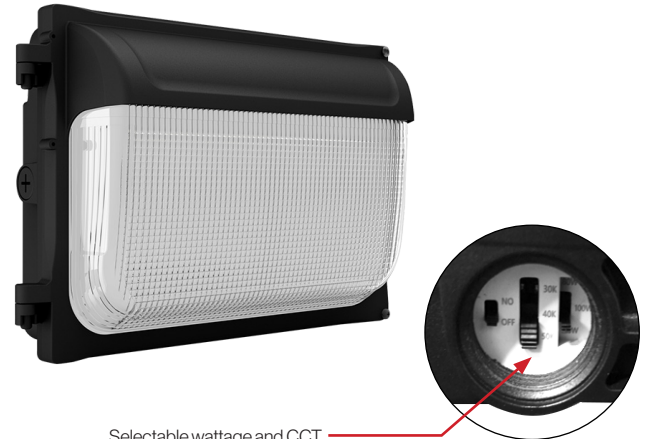

Selectable wattage and CCT

## Specifications

### Housing:

Pressure Die Cast Aluminum body to ensure better Thermal Management.

### Optics:

Prismatic UV Resistant Glass Lampshade

### Mounting:

Surface Mounting

### Driver:

120-347 V Auto Sensing driver with Operating temperature range of -40 °C ~ +45 °C  
Selectable Wattage 60M (60-40-30W) 120XL (120-100-80W)


### LED:

Field Selectable CCT of 3000K, 4000K & 5000K. Efficacy of  $\geq 130$ lm/w.


### Controls:

Compatible with 0-10V Dimming

## Dimensional Drawing

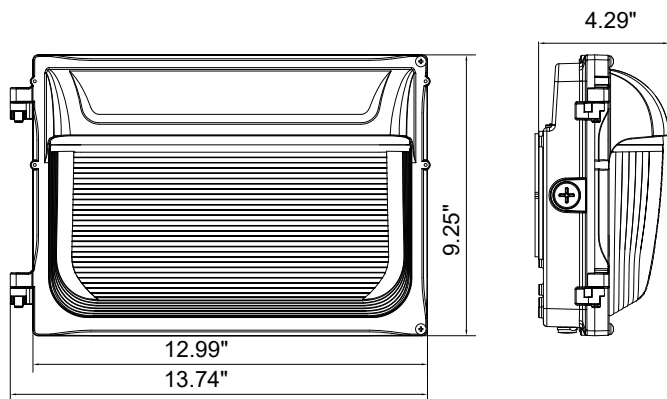

## Polar Candela

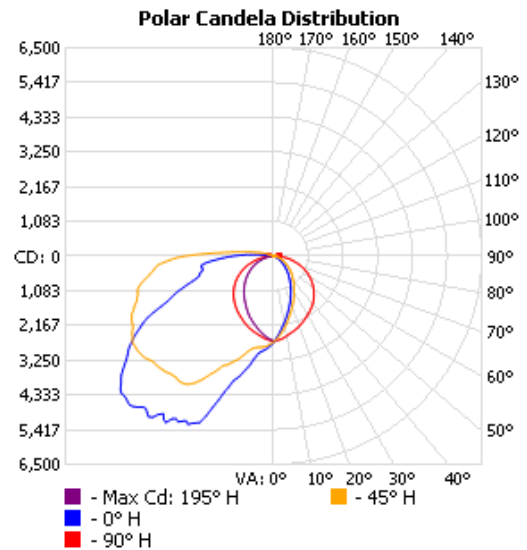

## Applications



# LED Wall Pack Light



<b>SSL-WP1TS</b>	<b>Segment</b>	<b>Wattage Range</b>	<b>Lumen Range</b>
	Commercial & Residential	Selectable Wattage (30W-120W)	3,900-15,600lm

## Ordering Information Example: SSL-WP1TS/60M/MW/MK/120-347V/D/PC/BLK

Family Name	Fixture Type	Wattage	CCT	Voltage (V)	Dimmable	Photocell	Finish
SSL (Solid state lighting)	WP1TS (LED Wall Pack)	60M (Max. Wattage 60W) 120XL (Max. Wattage 120W)	MW (Selectable Wattage)	MK (Selectable Kelvin)	120-347V	D (0-10V dimming)	PC (Default) BLK (Black) WH (White)

## Product Specification

Ordering Code	DLC Premium	Model Number	Wattage (W)	Input Voltage(V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Case QTY.
3680360	Yes	SSL-WP1TS/60M/MW/MK/120-347V/D/PC/BLK	60-40-30	120-347	50,000	7800-5200-3900	30-40-50	≥80	4
3680361	Yes	SSL-WP1TS/120XL/MW/MK/120-347V/D/PC/BLK	120-100-80	120-347	50,000	15600-13000-10400	30-40-50	≥80	4
3682257	Yes	SSL-WP1TS/120XL/MW/MK/120-347V/D/PC/WH	120-100-80	120-347	50,000	15600-13000-10400	30-40-50	≥80	4

## DLC Certification

Ordering #	Model Number	Primary Use	DLC Standard	DLC Premium
3680360	SSL-WP1TS/60M/MW/MK/120-347V/D/PC/BDK	Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires	-	S-BOXIGT
3680361	SSL-WP1TS/120XL/MW/MK/120-347V/D/PC/BDK	Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires	-	S-E3C2NF
3682257	SSL-WP1TS/60M/MK/120-347V/D/PC/BDK	Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires	-	S-TQ70M8