

LED Adjustable Wall Pack



SSL-WP2T	Segment	Wattage Range	Lumen Range
	Universal	Selectable Wattage (15W-75W)	1,950-9,750lm

Features

- Modern Design Compact Wallpack with Glass diffuser for long life & trouble free operation.
- Wet Location rated with operating temperature range of -40°C - $+50^{\circ}\text{C}$.
- Field Selectable (CCT 3000K, 4000K & 5000K) and wattage (15W - 30W in 30M & 40W - 75W in 75L model).
- Efficacy of ≥ 130 lm/W with 120-347V LED Auto-Sensing driver

Specifications

Housing:

Pressure Die Cast Aluminum body to ensure better Thermal Management.

Optics:

UV Resistant Glass Cover with Type III light distribution

Mounting:

Surface Mounting

Driver:

Auto-sensing 120-347 V LED driver with Operating temperature range of -40°C ~ $+50^{\circ}\text{C}$

LED:

Field Selectable CCT of 3000K, 4000K & 5000K. Efficacy of ≥ 130 lm/w.

Controls:


Compatible with 0-10V Dimming




Head adjustable 0° - 90°



Dimensional Drawing

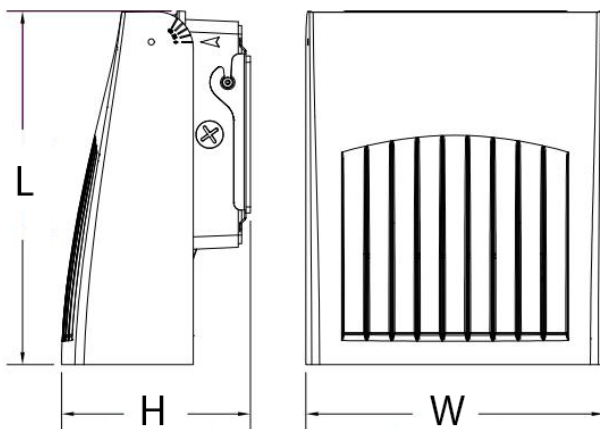

Polar Candela

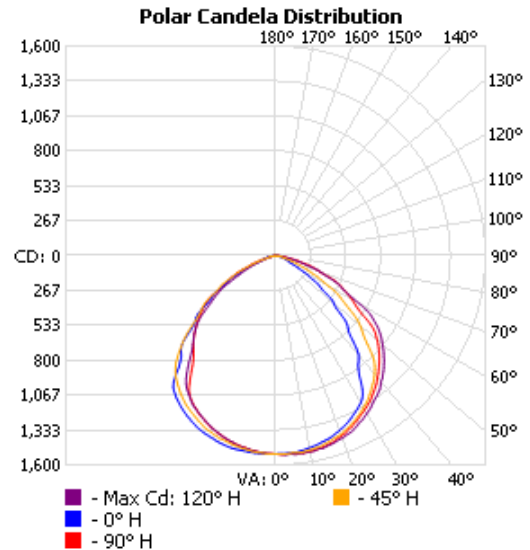

Applications



Malls



Hotels



Residences



Office Complex

LED Adjustable Wall Pack



SSL-WP2T	Segment	Wattage Range	Lumen Range
	Universal	Selectable Wattage (15W-75W)	1,950-9,750lm

Ordering Information Example: SSL-WP2T/30M/MW/MK/120-347V/D/DB

Family Name	Fixture Type	Type	Wattage	CCT	Voltage	Dimmable	Finish	Accessories
SSL (Solid state lighting)	WP2T (LED adjustable wall pack)	30M (Max. 30W medium size) 75L (Max. 75W large size)	MW (Selectable Wattage)	MK (Selectable Kelvin/CCT)	120-347V	D (Dimmable)	DB (Dark bronze)	Motion sensor Photocell Emergency battery driver

Product Specification

Ordering Code	DLC Premium	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Wet Location	Dimension LxWxH(inch)	Case QTY.
3680308	Y	SSL-WP2T/30M/MW/MK/120-347V/D/DB	30-24-20-15	120-347V	50,000	3900-3120-2600-1950	30-40-50	≥70	Yes	7.8" x 4.9" x 6.6"	4
3680309	Y	SSL-WP2T/75L/MW/MK/120-347V/D/DB	75-60-50-40	120-347V	50,000	9750-7800-6500-5200	30-40-50	≥70	Yes	11.3" x 6" x 9.5"	2
3660183	-	SSL-WP2T/LV/12V/PC	SSL WP2T adjustable wall pack, low voltage, 12V, photocell (button type)								
3660184	-	SSL-WP2T/EM/120-347V	SSL WP2T adjustable wall pack, emergency battery driver, 120-347V, 9W, 90 minute								
3660185	-	SSL-WP2T/EM/B-BOX	SSL WP2T adjustable wall pack, emergency battery driver back-box. (must be ordered for above option)								
3660186	-	SSL-WP2T/LV/12V/SENSOR	SSL WP2T adjustable wall pack, low voltage, 12V, microwave sensor, Max. Mtg 15m								
3660187	-	SSL-WP2T/LV/12V/SENSOR/B-BOX	SSL WP2T adjustable wall pack, low voltage, 12V, microwave sensor back-box (must be ordered for microwave sensor 3660186 option)								
3660217	-	SSL-WP2T/LV/12V/CONTROLLER	SSL WP2T adjustable wall pack, Haisen HD05R remote control (must be ordered for microwave sensor 3660186 option)								

Accessories

SSL-WP2T/LV/12V/PC



SSL-WP2T/EM/120-347V



SSL-WP2T/LV/12V/SENSOR



SSL-WP2T/LV/12V/CONTROLLER



NOTE:

- Microwave can penetrate walls or glass thinner than 20cm, movement in adjacent corridors may be detected.
- Detection area will be affected by speed of motion, mounting height and movement volume.
- Installation shall not be mounted to avoid false trigger caused by the luminaire itself shaking. (Rooftop HVAC, upper floor vibration, etc.)
- Shall not be installed next to large operating machines such as ventilator/ceiling fan to avoid false triggering caused by machine vibration.
- They cannot penetrate metal. Large metal object near the sensor may create a "dead zone" behind it.
- Microwave sensors have advantage over PIR device in that they can operate in hot environments, however, they are sensitive devices and can be prone to false detection by everyday items like ceiling fans, moving branches or curtains, loose packaging, etc.

Other options may be available, consult Turolight Sales. Specifications and data are subject to change without notice.

Related Products



RGD-CDR



RGD-CHY2



PRO-SP5



RGD-HS