

LED Backlit Panel



PRO-BLP2	Segment	Wattage Range	Lumen Range
	Commercial & Industrial	Selectable Wattage (25W-50W)	2,750-5,500lm

Features

- Ultra Slim Backlit panel with 35mm fixture height.
- Unibody CRCA Steel back housing with Aluminum Frame
- Damp Location rated with operating temperature range of -20 °C - + 40 °C.
- Selectable CCT (3500k, 4000k & 5000K) with Selectable Wattage in 2x4 & 2x2 Variants
- Auto-Sensing 120-347V Driver with 0-10V Dimming



Specifications

Housing:

CRCA Steel back housing with Aluminum Frame

Optics:

High Quality Translucent opal color diffuser

Mounting:

Recessed and Suspended through Suspension Kit.

Driver:

120-347V LED Auto-Sensing driver with Operating temperature range of -20 °C ~ +40 °C.


LED:

Field Selectable CCT of 3500K, 4000K & 5000K. Efficacy of ≥ 115 lm/w.

Controls:

0-10V Dimming


Dimensional Drawing

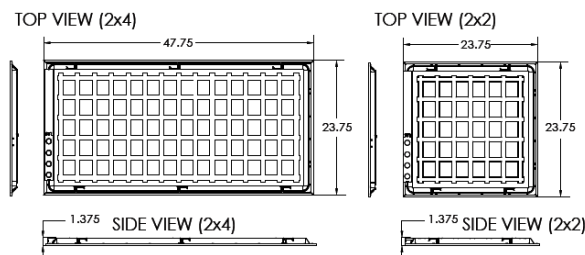

	L	W	H
2'x2'	23.75"	23.75"	1.38"
2'x4'	47.75"	23.75"	1.38"



Polar Candela

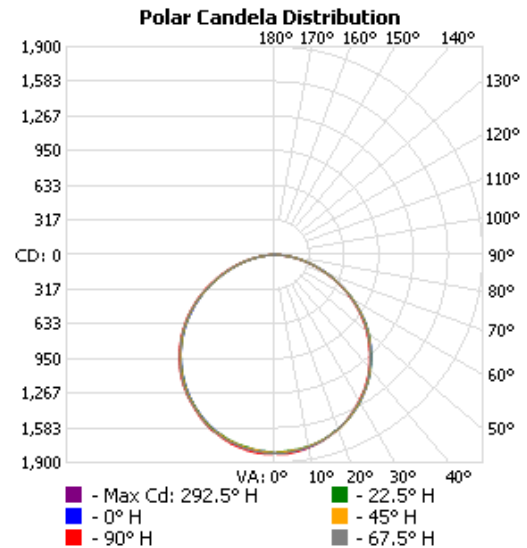

Applications



Offices



Malls



Hospitals

LED Backlit Panel



PRO-BLP2	Segment	Wattage Range	Lumen Range
	Commercial & Industrial	Selectable Wattage (25W-50W)	2,750-5,500lm

Ordering Information Example: PRO-BLP2/22/MW/MK/120-347V/D

Family Name	Fixture Type	Size	Wattage	CCT	Voltage	Dimmable
PRO	BLP2 (LED Backlit panel)	22 (2'x2') 24 (2'x4')	MW (Selectable Wattage)	MK (Selectable Kelvin)	120-347V	D (0-10V dimmable)

Product Information

Ordering Code	DLC	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating (L70)	Beam Angle	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Damp Location	Case QTY.
3680354	Yes	PRO-BLP2/22/MW/MK/120-347V/D	40-30-25	120-347V	50,000	120	4400-3300-2750	35-40-50	>80	Yes	4
3680355	Yes	PRO-BLP2/24/MW/MK/120-347V/D	50-40-30	120-347V	50,000	120	5500-4400-3300	35-40-50	>80	Yes	4

Related Products



SSL-ESC



RGD-SP2



DL-EC



Running Man sign