

# LED Premium Commercial Strip



<b>SEL-PS</b>	<b>Segment</b>	<b>Wattage Range</b>	<b>Lumen Range</b>
	Commercial & Industrial	30-80W Selectable Wattage	3,900-10,400lm

## Features

- White post painted CRCA Steel Housing in 4ft and 8ft.
- Operating temperature range of -25 °C ~ +45 °C.
- Field Selectable CCT (3500K, 4000K & 5000K) along with Auto Sensing 120-347V Driver.
- PC Co-extruded opal lens.
- Suitable for Surface, or suspended chain mounting. J-BOX split cover plate (included).
- DLC 5.1 Premium listed / Indoor Luminaires SEL-4FM as Low-Bay & SEL-8FM as High-Bay Luminaires.

## Specifications

### Housing:

White post painted CRCA steel housing with split octagon box cover.

### Optics:

PC Coextruded opal lens snaps onto housing for even and glare free lighting.

### Mounting:

Suitable for surface or suspended mounting.

### Driver:

Auto sensing 120-347V, selectable wattage with Operating temperature range of -25 °C ~ +45 °C.

### LED:


Field Selectable CCT of 3500K, 4000K & 5000K. Efficacy of 130lm/w

### Controls:

0-10V Dimming with optional Low Voltage sensor controlled via optional Remote Control.




## Dimensional Drawing

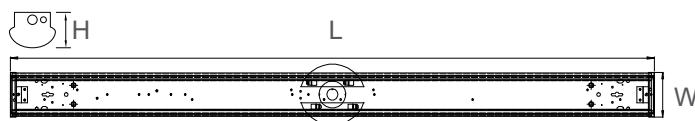

	L	W	H
4FM	47.67"	3.14"	3.10"
8FM	96.28"	3.14"	3.10"

## Polar Candela

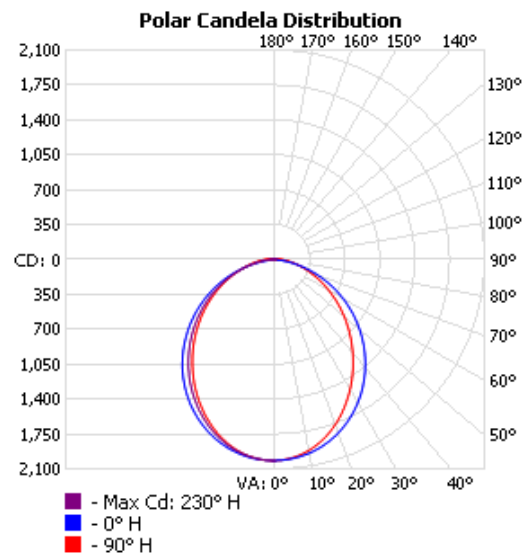

## Applications



Corridors



Utility rooms



Warehousing

# LED Premium Commercial Strip



<b>SEL-PS</b>	<b>Segment</b>	<b>Wattage Range</b>	<b>Lumen Range</b>
	Commercial & Industrial	30-80W Selectable Wattage	3,900-10,400lm

## Ordering Information Example: SEL-PS/4FM/MW/MK/120-347V/D

Family Name	Fixture Type	Size	Wattage	CCT	Voltage	Dimmable	Sensor	Option
SEL (SELECT)	PS (Premium Commercial Strip)	4F (4') 8F (8')	MW (Selectable wattage)	MK (Selectable CCT)	120-347V	D (Dimmable)	LV6SA (Low voltage sensor)	RM (Row MTG plate)

## Product Specification

Ordering Code	DLC Premium	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating (L70)	Beam Angle	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Damp Location	M.O.L (inch)	Case QTY.
3680374	Yes	SEL-PS/4FM/MW/MK/120-347V/D	40-35-30W	120-347V	50,000	100°	5200-4550-3900	35-40-50	>80	Yes	48	6
3680375	Yes	SEL-PS/8FM/MW/MK/120-347V/D	80-70-50W	120-347V	50,000	100°	10400-9150-7800	35-40-50	>80	Yes	96	6
3680379	Yes	SEL-PS/4FM/MW/MK/120-347V/D/A/LV6SA	40-35-30W	120-347V	50,000	100°	5200-4550-3900	35-40-50	>80	Yes	48	6
3680380	Yes	SEL-PS/8FM/MW/MK/120-347V/D/A/LV6SA	80-70-50W	120-347V	50,000	100°	10400-9150-7800	35-40-50	>80	Yes	96	6
3660260	-	SEL-PS/LV6SA/CONTROLLER	SEL-PS Remote Hand Held Controller, for LV6SA LOVO 6M Sensor									

## Related Products



SSL-CPG



VIV-T8DF4/11.5W/XX/F



VIV-T8BPSP4/11.5W/XX/F/120-347V



TL-RMES111-UDC