

# T8 LED Bypass


VIV-T8BPBL/11.5W/SD/120-347V (4FT)



Bypass ballast (type B)

120-347V

Single & Double ended wiring

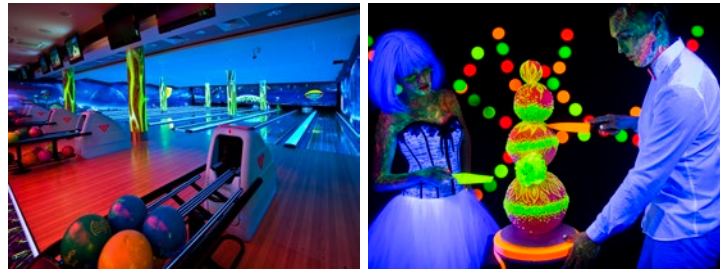

## Features & Benefits

4FT, cUL listed

High UV transmittance glass

UV wavelength 365nm


Beam angle 220°, 20000 hours life (L70)

2-year limited warranty

Operating temperature range -20 °C ~ +45 °C

External ballast not required, use existing lamp holders (non-shunted / shunted)

## Dimensional Drawing

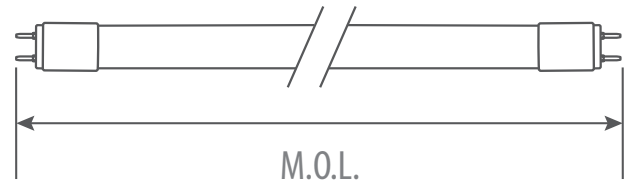

## Ordering Information Example: VIV-T8BPBL/11.5W/SD/120-347V

Family Name	Lamp Type	Wattage	Installation	Voltage
VIV (Vivid)	T8BPBL (Blacklight)	11.5W	SD (Single & Double Ended)	120-347V

## Product Specification

Ordering Code	Model Number	Wattage (W)	Voltage (V)	Peak wavelength (nm)	UVA OUT(1m) (µw/cm²)	Base	Hour Rating	Beam Angle	M.O.L. (inch)	Case QTY.
1752004	VIV-T8BPBL/11.5W/SD/120-347V (4FT)	11.5	120-347	365	33	G13	20,000	220°	48	10