

LED Linear High Bay



SSL-LHB5	Segment	Wattage Range	Lumen Range
	Commercial & Industrial	Selectable Wattage (78-400W)	11,700-60,000lm

Features

- Slim & Compact Design Linear Highbay with CRCA Steel Body and Polycarbonate Glare control Diffuser.
- Excellent Efficacy of 150 lm/w with 120-347V Auto-Sensing Driver.
- Field Selectable Wattage and Selectable CCT – 40-50K.
- Equipped with 12V receptacle, for microwave motion sensor option
- 10' white cord, 10' aircraft cable (set)
- Damp Location Rated with L70 @ 100,000 Hrs & CRI ≥80
- Compatible with 0-10V Dimming

Specifications

Housing:

CRCA Steel Body with White Powder Coat finish.

Optics:

Premium Polycarbonate Optical Glare Control Diffuser.

LED PCB :

Aluminum Based MCPCB for Long Life

Driver :

120-347V LED Auto Sensing driver with Operating temperature range of -40° C ~ +50° C.

LED:


Field Selectable 40-50K CCT . Efficacy of 150lm/w.

Controls:

0-10V Dimming

Note : Wiring needs to be disconnected from Sensor Sockets to access the 0-10V dimming wiring.


Dimensional Drawing

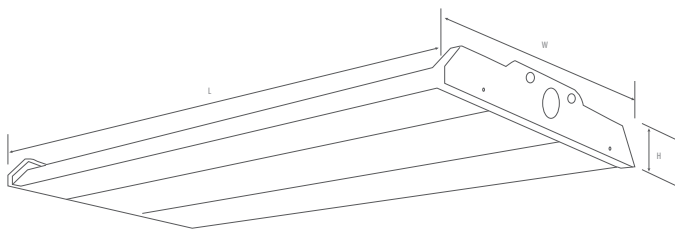

	L	W	H
SSL-LHB5/78W	13.0"	10.2"	1.8"
SSL-LHB5/155M	22.8"	10.2"	1.8"
SSL-LHB5/270L	31.1"	10.2"	1.8"
SSL-LHB5/400XL	44.1"	10.2"	1.8"



Polar Candela

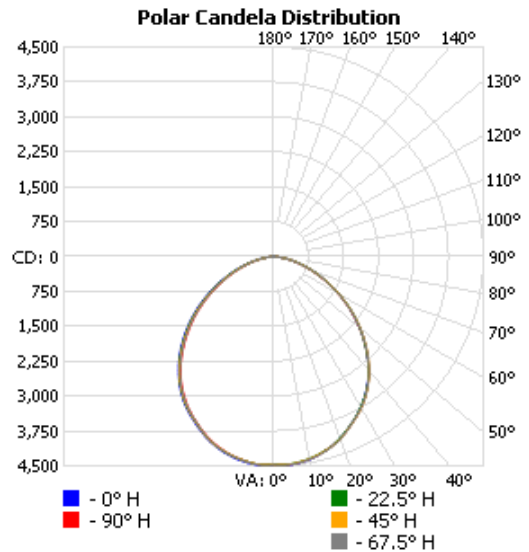

Applications



Warehouses



Industries



Subway

LED Linear High Bay



SSL-LHB5	Segment	Wattage Range	Lumen Range
	Commercial & Industrial	Selectable Wattage (78-400W)	11,700-60,000lm

Ordering Information Example: SSL-LHB5/135S/MW/MK/120-347V/AC/D

Family Name	Fixture Type	Wattage	CCT (Kelvin)	Voltage	Mounting	Dimmable	Accessories
SSL (Solid state lighting)	LHB5 (Linear high bay)	78W 155M/MW (Selectable Wattage, Max.155W) 270L/MW (Selectable Wattage, Max.270W) 400XL/MW (Selectable Wattage, Max.400W)	MK (Selectable Kelvin/ CCT)	120-347V	AC (AirCraft Cable)	D (0-10V)	SSL-LHB5/LV/12V/SENSOR SSL-LHB5/LV/12V/CONTROLLER SSL-LHB5/PDT/KIT SSL-LHB5/SRF/KIT

Product Information

Ordering Code	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Wet Location	Case QTY.
3682219	SSL-LHB5/78W/MK/120-347V/AC/D	78	120-347V	100,000	11700	40-50	≥80	Yes	4
3682216	SSL-LHB5/155M/MW/MK/120-347V/AC/D	155-130-105	120-347V	100,000	23250-19500-15750	40-50	≥80	Yes	4
3682211	SSL-LHB5/270L/MW/MK/120-347V/AC/D	270-230-200	120-347V	100,000	40500-34500-30000	40-50	≥80	Yes	4
3682212	SSL-LHB5/400XL/MW/MK/120-347V/AC/D	400-360-320	120-347V	100,000	60000-54000-48000	40-50	≥80	Yes	2
3660261	SSL-LHB5/LV/12V/SENSOR	SSL-LHB5 Linear Highbay 12V DC Microwave Sensor							
3660262	SSL-LHB5/LV/12V/CONTROLLER	SSL-LHB5 Linear Highbay 12V DC Microwave Sensor Remote Control (required for programming)							
3660263	SSL-LHB5/PDT/KIT	SSL-LHB5 Linear Highbay Pendant Mounting Hanger kit (1pcs)							
3660264	SSL-LHB5/SRF/KIT	SSL-LHB5 Linear Highbay Surface Mounting Kit. (2pcs)							

NOTE:

- Microwave can penetrate walls or glass thinner than 20cm, movement in adjacent corridors may be detected.
- Detection area will be affected by speed of motion, mounting height and movement volume.
- Installation shall not be mounted to avoid false trigger caused by the luminaire itself shaking. (Rooftop HVAC, upper floor vibration, etc.)
- Shall not be installed next to large operating machines such as ventilator/ceiling fan to avoid false triggering caused by machine vibration.
- They cannot penetrate metal. Large metal object near the sensor may create a "dead zone" behind it.
- Microwave sensors have advantage over PIR device in that they can operate in hot environments, however, they are sensitive devices and can be prone to false detection by everyday items like ceiling fans, moving branches or curtains, loose packaging, etc.

Other options may be available, consult Turolight Sales. Specifications and data are subject to change without notice.
Microwave sensors should be tested before, if used in close proximity to Airports / Communication towers etc.

Related Products



SSL-XHC2



DL-VT2



DL-EC



SSL-AL3