

LED FIXTURE

SEL Series



LED Linear High Bay SEL-LHB

Offering quality lighting and excellent energy savings compared to linear fluorescent and HID high bay fixtures.



5-year limited warranty


Operating temperature range -20 °C ~ +50 °C



Features & Benefits

- cUL listed, DLC Premium rated
- System light efficacy 150 LPW, 120-347V auto-sensing driver
- 10' white cord, 10' aircraft cable (set)
- Formed steel housing with white powder coat finish/ frosted lens
- 0-10V dimming, product can dim down to 10%
- CRI≥80, 120° beam spread, L70 @ 100,000 hrs
- Damp location rated

Dimensional Drawing

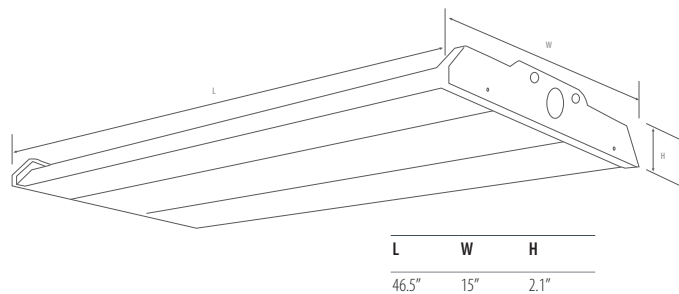

Ordering Information Example: SEL-LHB/540XXL/40/120-347V/AC/D

Family Name	Fixture Type	Wattage	CCT	Voltage (V)	Mounting	Dimmable
SEL	LHB (Linear high bay)	540XL (540W)	40 (4000K) 50 (5000K)	120-347V	AC (Aircraft cable 10'set)	D (0-10V dimming)

Product Specification

Ordering Code	DLC Premium	Model Number	Description	Wattage (W)	Input Voltage(V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Dimension L×W×H(inch)	Case QTY.
3665322	Yes	SEL-LHB/540XXL/40/120-347V/AC/D	SEL-LHB Linear Highbay 540W (81000lm), 40K, 120-347V, Auto-Sensing Driver, Aircraft Cable Mtg., 0-10VDim, c/w 10'White Cord	540	120-347V	100,000	81000	4000	>80	46.5" x 15" x 2.1"	1
-	Yes	SEL-LHB/540XXL/50/120-347V/AC/D	SEL-LHB Linear Highbay 540W (81000lm), 50K, 120-347V, Auto-Sensing Driver, Aircraft Cable Mtg., 0-10VDim, c/w 10'White Cord	540	120-347V	100,000	81000	5000	>80	46.5" x 15" x 2.1"	1

DLC Certification

Ordering #	Model Number	Primary Use	DLC Standard	DLC Premium
-	SEL-LHB/540XXL/50/120-347V/AC/D	Luminaires grande hauteur pour bâtiments commerciaux et industriels	-	S-2K6DH8
3665322	SEL-LHB/540XXL/40/120-347V/AC/D	Luminaires grande hauteur pour bâtiments commerciaux et industriels	-	S-JG4JWN