

# LED FIXTURE

**SEL Series**



## LED Round High Lumen HighBay SEL-RHB

120-347V auto-sensing driver, 0-10V dimming  
Selectable Wattage & Selectable Kelvin (CCT)



5-year limited warranty


Operating temperature range -40° C ~ +55° C



### Features & Benefits

- cULus listed, DLC Premium and NSF rated
- System light efficacy 170 LPW, 120-347V auto-sensing driver
- White finish, with 3M cable
- 90° beam spread, PC Lens
- Sensor socket supplied and capable
- CRI≥80, L70 @ 50,000 hrs
- IP65, wet location rated

### Dimensional Drawing

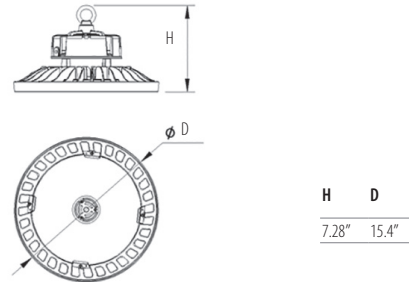

### Ordering Information Example: SEL-RHB/300XL/MW/MK/120-347V/HK/D

Family Name	Fixture Type	Wattage	CCT	Voltage	Installation	Dimmable
SEL (Select)	RHB (Round High Bay)	300XL/MW (Selectable Wattage, Max. 300W)	MW (Selectable CCT)	120-347V	HK (Hook)	D (0-10V dimming)

### Product Specification

Ordering Code	DLC Premium	Model Number	Description	Wattage (W)	Input Voltage (V)	Hour Rating (L70)	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Wet Location	Dimension D x H (inch)	Case QTY.
3682233	Yes	SEL-RHB/300XL/MW/MK/120-347V/HK/D	SEL-RHB HighBay, Selectable-W 300W-270W-240W (51000-45900-40800lm), Selectable 40-50K, 120-347V, 0-10V Dimming c/w Sensor socket (Sensor ordered separately). 10' Power & 10'LV Cords White	300-270-240	120-347V	50,000	51000-45900-40800	40-50	>80	Yes	15.4x7.28	1
3660159	-	SSL-CHB/LV/12V/SENSOR	LED 12V DC microwave sensor (w/o socket), -25° C ~ +60° C									
3660160	-	SSL-CHB/LV/12/CONTROLLER	12V DC microwave sensor remote control (required for programming)									

### DLC Certification

Ordering #	Model Number	Primary Use	DLC Standard	DLC Premium
3682233	SEL-RHB/300XL/MW/MK/120-347V/HK/D	High-Bay Luminaires for Commercial and Industrial Buildings	-	S-IHLM9W