

# T8 LED Hybrid

## HD-T8HYSP (Selectable CCT)




**T8HYSP/N**  
High-transmittance nano-plastic, shatterproof  
No bending under high temperature

**T8HYSP**  
Plastic end caps, glass tube with PET film, shatterprotect\*  
\*ShatterProtect utilizes PET film to reduce the unexpected risk of shattering

5-year limited warranty

Operating temperature range -20 °C ~ +45 °C




**T8HYSP/U6**  
Plastic, shatterproof, U-Bend 6

### Features & Benefits

- cUL listed, DLC
- One solution for both direct fit and bypass options
- Direct Fit, compatible with most Instant start ballast & rapid start ballast\*
- Bypass, works for both single and double ended wiring options
- Fits into existing linear/U6 fixtures, no socket changes
- 50,000 hour life, 180° beam angle, high CRI (83+)
- Damp locatoin approved

\*For detail, you may contact your sales person or check [www.turolight.com](http://www.turolight.com) for ballast compatibility list.

### Dimensional Drawing

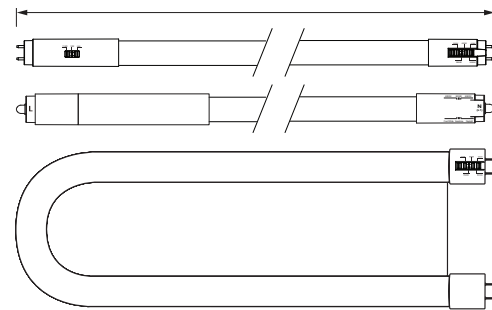

### Ordering Information Example: HD-T8HYSP/9W/5CCT/F/120-347V/2FT

Family Name	Lamp Type	Wattage	CCT	Frost	Voltage	Length
HD	T8HYSP (Hybrid ShatterProtect)	9W 11W	5CCT (30-35-40-50-65K)	F (Frost)	120-347V	2FT 3FT
	T8HYSP/N (Hybrid ShatterProof, Nano)	13W				Blank (4FT)
	HD-T8HYSP/U6 (Hybrid ShatterProof, Plastic, U-Bend 6)	13W	5CCT (30-35-40-50-65K)	F (Frost)	Blank (120-277V)	Blank (2FT)

### Product Specification

Ordering Code	DLC	Model Number	Wattage (W)	Voltage (V)	Initial Lumens(lm)	Base	Hour Rating	Beam Angle	CCT(K)	CRI	M.O.L. (inch)	Case QTY.
1753001	Yes	HD-T8HYSP/9W/5CCT/F/120-347V/2FT	9	120-347	1450	G13	50,000	180°	30-35-40-50-65	83	24	8
1753002	-	HD-T8HYSP/11W/5CCT/F/120-347V/3FT	11	120-347	1700	G13	50,000	180°	30-35-40-50-65	83	36	8
1752006	Yes	HD-T8HYSP/N/13W/5CCT/F/120-347V	13	120-347	2200	G13	50,000	180°	30-35-40-50-65	83	48	25
1752005	-	HD-T8HYSP/U6/13W/5CCT/F	13	120-277	1800	G13	50,000	180°	30-35-40-50-65	83	24	24