

LED Backlit Panel



PRO-BLP3	Segment	Wattage Range	Lumen Range
	Commercial & Industrial	25W-50W	2,750-5,500lm

Features

- Ultra Slim Backlit panel with 35mm fixture height.
- Smaller frame allows for a larger luminous area, strengthened Back Panel
- Damp Location rated with operating temperature range of -20 °C ~ + 40 °C.
- Selectable CCT (3500k, 4000k & 5000K) with Selectable Wattage in 1x4, 2x4 & 2x2 Variants
- Auto-Sensing 120-347V Driver, <_ 10% Flicker
- Compatible with 0-10V Dimming
- DLC, cUL listed

Specifications

Housing:

CRCA Steel back housing with Aluminum Frame

Optics:

High Quality Translucent opal color diffuser, lens material: PMMA

Mounting:

Recessed and Suspended through Suspension Kit.

Driver:

120-347V LED Auto-Sensing driver with Operating temperature range of -20 °C ~ +40 °C.

LED:


Field Selectable CCT of 3500K, 4000K & 5000K. Efficacy of ≥ 115 lm/w.

Controls:

0-10V Dimming

PMMA lens


Dimensional Drawing

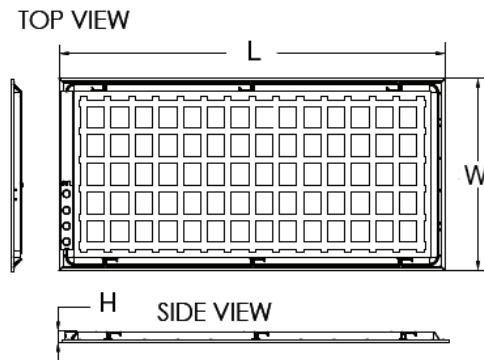

	L	W	H
2'x2'	23.75"	23.75"	1.38"
2'x4'	47.75"	23.75"	1.38"
1'x4'	47.75"	11.9"	1.38"



Polar Candela

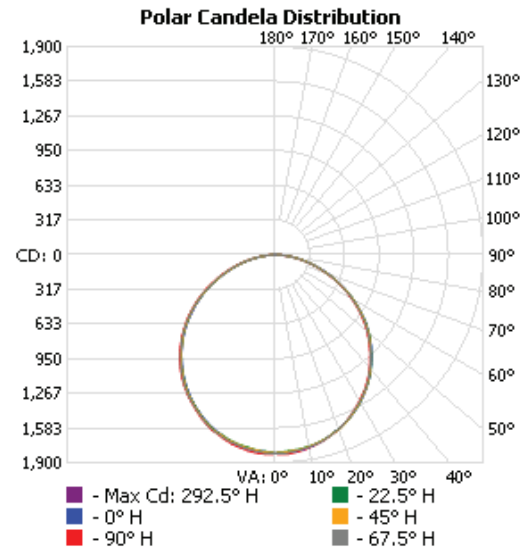

Applications



Offices



Malls



Hospitals

LED Backlit Panel



PRO-BLP3	Segment	Wattage Range	Lumen Range
	Commercial & Industrial	25W-50W	2,750-5,500lm

Ordering Information Example: PRO-BLP3/22/MW/MK/120-347V/D

Family Name	Fixture Type	Size	Wattage	CCT	Voltage	Dimmable
PRO	BLP3 (LED Backlit panel)	22 (2'x2') 24 (2'x4') 14 (1'x4')	MW (Selectable Wattage)	MK (Selectable Kelvin)	120-347V	D (0-10V dimmable)

Product Information

Ordering Code	DLC	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating (L70)	Beam Angle	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Damp Location	Case QTY.
3682243	Yes	PRO-BLP3/22/MW/MK/120-347V/D	40-30-25	120-347V	50,000	110	4400-3300-2750	35-40-50	>80	Yes	4
3682244	Yes	PRO-BLP3/24/MW/MK/120-347V/D	50-40-30	120-347V	50,000	110	5500-4400-3300	35-40-50	>80	Yes	4
3680384	Yes	PRO-BLP3/14/MW/MK/120-347V/D	40-30-25	120-347V	50,000	110	4400-3300-2750	35-40-50	>80	Yes	4
3660301	-	RGD-R/14/DWF	RIGID Recessed Drywall Frame Kit, 1x4								
3660300	-	RGD-R/22/DWF	RIGID Recessed Drywall Frame Kit, 2x2								
3660302	-	RGD-R/24/DWF	RIGID Recessed Drywall Frame Kit, 2x4								

DLC Certification

Ordering #	Full Model Number	Primary Use	DLC Standard	DLC Premium
3682243	PRO-BLP3/22/MW/MK/120-347V/D	2x2 Luminaires for Ambient Lighting of Interior Commercial Spaces	S-XVV4NG	-
3682244	PRO-BLP3/24/MW/MK/120-347V/D	2x4 Luminaires for Ambient Lighting of Interior Commercial Spaces	S-36M8BD	-

Related Products



SSL-ESC



RGD-SP3



DL-EC2



Running Man sign