

B10, G16.5 LED Filament Bulbs

AR2-B10/I90, AR2-G16.5/I90



2-year limited warranty

Operating temperature range -25 °C ~ +45 °C



Features & Benefits

High CRI ≥90

With clear, amber, and milky white glass cover


Non-visible flicker < 30%

15,000 hours life, dimmable

Damp location rated

Not for totally enclosed fixtures

Dimensional Drawing

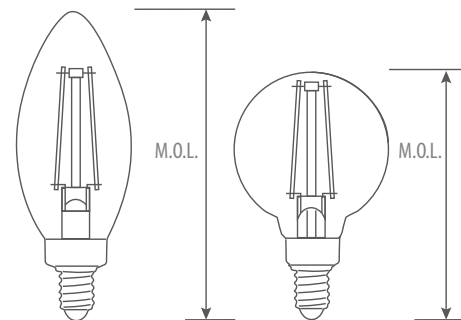

Ordering Information Example: AR2-B10/I90/5.5W/30/E12/D/C

Family Name	Lamp Type	CRI	Wattage	CCT	Base	Dimmable	Cover
AR2 (Artisan)	B10	I90 (CRI≥90)	5.5W	22 (2200K), 27 (2700K), 30 (3000K), 40 (4000K)	E12	D (Dimmable)	C (Clear), A (Amber), MW (Milky White)
	G16.5			30 (3000K), 27 (2700K)			C (Clear), MW (Milky White)

Product Specification

Ordering Code	Model Number	Wattage (W)	Base	Voltage (V)	Hour Rating	Beam Angle	Initial Lumens(lm)	CCT(K)	Non-visible Flicker	CRI	Damp Location	Dimmable	M.O.L. (inch)	Case QTY.
1771240	AR2-B10/I90/5.5W/30/E12/D/C	5.5	E12	120	15,000	330°	500	3000	< 30%	≥90	Yes	Yes	3.90	40
1771409	AR2-B10/I90/5.5W/40/E12/D/C	5.5	E12	120	15,000	330°	500	4000	< 30%	≥90	Yes	Yes	3.90	40
1771251	AR2-B10/I90/5.5W/27/E12/D/C	5.5	E12	120	15,000	330°	500	2700	< 30%	≥90	Yes	Yes	3.90	40
1771248	AR2-B10/I90/5.5W/30/E12/D/MW	5.5	E12	120	15,000	330°	500	3000	< 30%	≥90	Yes	Yes	3.90	40
1771932	AR2-B10/I90/5.5W/22/E12/D/A	5.5	E12	120	15,000	330°	450	2200	< 30%	≥90	Yes	Yes	3.90	40
1771238	AR2-G16.5/I90/5.5W/30/E12/D/C	5.5	E12	120	15,000	330°	500	3000	< 30%	≥90	Yes	Yes	3.11	40
1771252	AR2-G16.5/I90/5.5W/30/E12/D/MW	5.5	E12	120	15,000	330°	500	3000	< 30%	≥90	Yes	Yes	3.11	40
1771255	AR2-G16.5/I90/5.5W/27/E12/D/C	5.5	E12	120	15,000	330°	500	2700	< 30%	≥90	Yes	Yes	3.11	40