

LED Surface Discus



EDA-HS	Segment	Wattage Range	Lumen Range
	Commercial & Industrial	10-40W	900-3,600lm

Features

- Slim Surface Fixture with special White finish, Multiple installation options for varied application.
- Efficacy of 90 lm/w with Operating temperature range -20 °C ~ +40 °C
- Field Selectable CCT (2700K, 3000K, 3500K, 4000K & 5000K) along with 120-277V LED UNV driver.
- Damp Location Rated with L70 @ 50,000 Hrs & CRI ≥80.

Specifications

Housing:

Polycarbonate Housing with White Finish.

Optics:

Polycarbonate Diffuser

Mounting:

Flush Mtg. to J-Box is default, optional Mtg., Semi-Flush, Pendant, AC cable.

Driver:

120-277V LED UNV driver with Operating temperature range of -20 °C ~ +40 °C.


LED:

Field Selectable CCT of 2700K, 3000K, 3500K, 4000K & 5000K. Efficacy of ≥ 90lm/w.

Controls:

0-10V Dimming


Dimensional Drawing

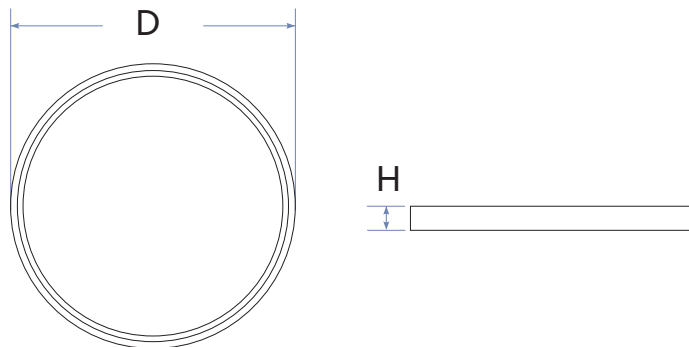

	D	H
EDA-HS/8	8.19"	0.94"
EDA-HS/11	11.54"	0.94"
EDA-HS/16	15.63"	0.94"
EDA-HS/24	23.62"	0.94"



Polar Candela

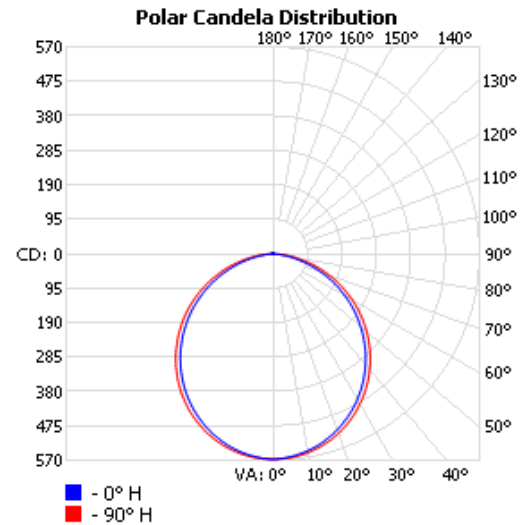

Applications



Hotels



Offices



Residences



Restaurants

All specs and Dimensions are subject to change at Company's discretion.

LED Surface Discus



EDA-HS	Segment	Wattage Range	Lumen Range
	Commercial & Industrial	10-40W	900-3,600lm

Ordering Information Example: EDA-HS/11/15W/MK/UNV/WH/0-10V

Family Name	Fixture Type	Size	Wattage	CCT	Voltage	Dimmable	Accessories
EDA (ENDURA)	HS (Surface discus)	8 (8"), 11 (11"), 16 (16"), 24 (24")	10W, 15W, 25W, 40W	MK (Selectable Kelvin/CCT)	UNV (120-277V)	0-10V (0-10V Dimming)	EDA-HS/PDT/KIT EDA-HS/SRF/KIT EDA-HS/AC/PDT/KIT

Product Specification

Ordering Code	Energy Star	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Lumens (lumen)	CCT (K)	CRI	Beam Angle	Damp Location	Dimmable	Dimension D×H (inch)	Case QTY.
3682106	Yes	EDA-HS/8/10W/MK/UNV/WH/0-10V	10	120-277	50,000	900	30/40/50	≥80	112°	Yes	Y	8.19" × 0.94"	20
3682107	Yes	EDA-HS/11/15W/MK/UNV/WH/0-10V	15	120-277	50,000	1350	27/30/35/40/50	≥80	112°	Yes	Y	11.54" × 0.94"	10
3682108	Yes	EDA-HS/16/25W/MK/UNV/WH/0-10V	25	120-277	50,000	2250	27/30/35/40/50	≥80	112°	Yes	Y	15.63" × 0.94"	6
3682109	Yes	EDA-HS/24/40W/MK/UNV/WH/0-10V	40	120-277	50,000	3600	27/30/35/40/50	≥80	112°	Yes	Y	23.62" × 0.94"	5
3660241	-	EDA-HS/8/SRF/KIT	ENDURA 8" Dia. White, Surface Semi-Flush Mtg. Kit.										
3660242	-	EDA-HS/11/SRF/KIT	ENDURA 11" Dia. White, Surface Semi-Flush Mtg. Kit.										
3660244	-	EDA-HS/11/PDT/KIT	ENDURA 11" Dia. White, 1.2m Pendant Stem Mtg. Kit.										
3660243	-	EDA-HS/16/SRF/KIT	ENDURA 16" Dia. White, Surface Semi-Flush Mtg. Kit.										
3660245	-	EDA-HS/16/PDT/KIT	ENDURA 16" Dia. White, 1.2m Pendant Stem Mtg. Kit.										
3660246	-	EDA-HS/24/AC/PDT/KIT	ENDURA 24" Dia. White, 1.2m Aircraft Cable Pendant Mtg. Kit.										

Accessories

EDA-HS/SRF/KIT



EDA-HS/PDT/KIT



EDA-HS/AC/PDT/KIT



All specs and Dimensions are subject to change at Company's discretion.