

# Installation Instruction

## LED Slim Panel

Applicable models:  
EDA-SP2

### INSTALLATION & OPERATING INSTRUCTION GUIDE

#### READ THESE IMPORTANT SAFETY INSTRUCTIONS

Please read and understand this entire manual before attempting to assemble, operate or install this product.


1. RISK OF FIRE OR ELECTRIC SHOCK: The electrical rating of this product is 120-347 V AC.
2. Danger-Risk Of Shock-Disconnect Power Before Installation
3. WARNING - To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
4. Suitable For Wet Locations
5. This product must be installed in accordance with any applicable installation code(s) by a qualified electrician or person familiar with the construction and operation of the product and the hazards involved.
6. This Device Is Not Intended For Use With Emergency Exits

For your safety, please read all instructions completely before beginning the installation.

**CAUTION:** To avoid possible electrical shock, be sure that power supply is turned off at the fuse box/circuit breaker before installing or servicing the fixture.

#### PACKAGE CONTENTS

Make sure all parts are present before beginning installation of this product. Compare package contents with parts list and diagram shown here. If parts are missing or damaged, do not assemble, install or operate this product.

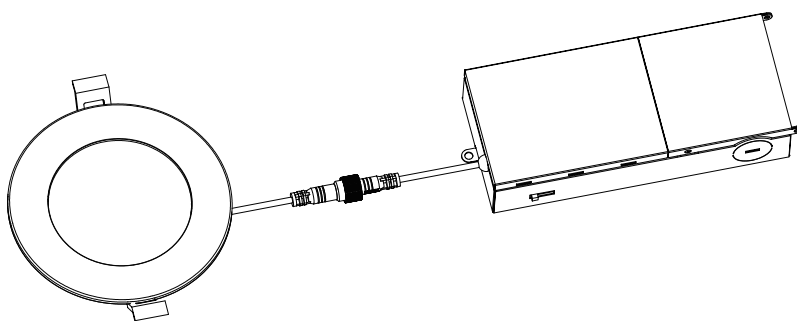

#### Hole Cut Size

EDA-SP2/4	Ø4.3" (109mm)
EDA-SP2/6	Ø6.3" (160mm)
EDA-SP2/8	Ø8.3" (211mm)



#### PRE-INSTALLATION:

1. Turn power OFF from the electrical panel before starting installation.
2. Locate a suitable position to place the fixture and open in accordance to the cut-hole dimensions (refer to Hole Cut Table for appropriate size).
3. Run electrical wire from the switch (power supply) through the mounting hole - use NMD90 Romex or BX cable.

#### DRIVER WIRING:

1. Open the hardwire box swing cover and remove the appropriate knockout(s).
2. Insert the electrical supply cable through the knockout and secure with a cable connector (sold separately).
3. Using wire nuts, connect green ground wire of cable to green wire on box. Connect white wire of cable to white wire of box. Connect black wire of cable to black wire of box. Pink and purple wire for dimming. (Fig. 1)
4. Place all wiring and connections back in to the box and close the cover.
5. New construction applications : Hardwire box shall be firmly secured to studs, joists, or similar fixed structural units.  
Remodel applications : Do not require the hardwire box to be firmly secured after the mounting plates, studs, joists, or structural units have been concealed.

Insert hardwire box through the mounting hole. (Fig.2)



#### FIXTURE INSTALLATION:

1. Connect the fixture to the hardwire box by inserting and twisting the male/female connectors. (Fig. 3)
2. Push spring loaded clips on the fixture upwards and insert fixture base in to the mounting hole. Release the clips and fixture will be pulled flush to the ceiling. (Fig.4)
3. Once assembly is complete, turn on power to confirm fixture is working properly.

