

T5 LED Bypass

HD-T5BPSP (Selectable CCT)



5-year limited warranty


Operating temperature range -20 °C ~ +45 °C



Features & Benefits

- cULus listed, DLC approved
- External ballast not required, use existing lamp holders (non-shunted / shunted)
- Single-ended & Double-ended installation (UNV), Double-ended only (120-347V)
- Our safety features allow for installation as well as misapplication protection¹
- NSF/ANSI 2 certified²
- Beam angle 180°, High CRI (83+)
- 50,000 hour life (L70)

Dimensional Drawing

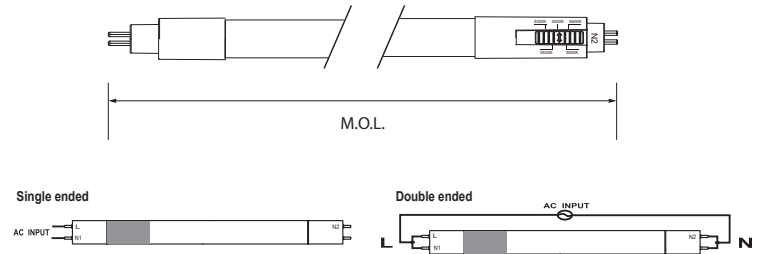

¹Contact your local Turolight representative for detail ² Shatterprotect utilizes PET film to reduce the unexpected risk of shattering

Ordering Information Example: HD-T5BPSP/13W/5CCT/F/UNV

Family Name	Lamp Type	Wattage	CCT	Frost	Voltage
HD	T5BPSP (T5 Bypass, shatter protect)	12W (2ft) 13W (4ft) 16W (3ft)	5CCT (30-35-40-50-65K)	F (Frost)	UNV (120-277V)
		25W (4ft)			120-347V

Product Specification

Ordering Code	DLC	Model Number	Wattage (W)	Voltage (V)	Initial Lumens(lm)	Base	Hour Rating	Beam Angle	CCT(K)	CRI	M.O.L. (inch)	Case QTY.
1753013	-	HD-T5BPSP/13W/5CCT/F/UNV (4FT HE)	13	120-277	1700	G5	50,000	180°	30-35-40-50-65	83	48	25
1753014	-	HD-T5BPSP/12W/5CCT/F/UNV (2FT H0)	12	120-277	1500	G5	50,000	180°	30-35-40-50-65	83	24	8
1753015	-	HD-T5BPSP/16W/5CCT/F/UNV (3FT H0)	16	120-277	2000	G5	50,000	180°	30-35-40-50-65	83	36	8
1753016	Yes	HD-T5BPSP/25W/5CCT/F/120-347V (4FT H0)	25	120-347	3300	G5	50,000	180°	30-35-40-50-65	83	48	25