


Project:			
Ordering info:			
Submitted by:		Date:	



NEBULUM 4" Cylinder Series


NBLM4-CYL/P

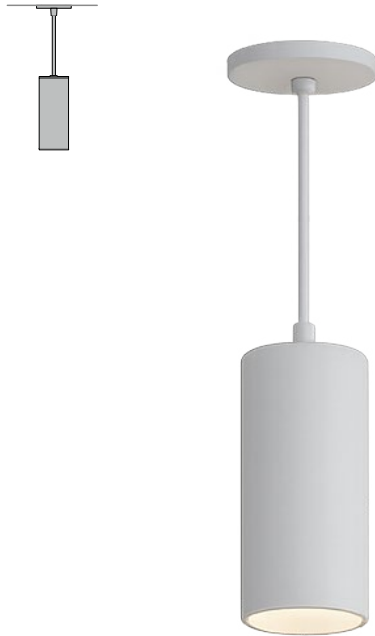

Pendant Mount

Stem Mount (Rigid Pendant Mount)

Cord Mount (Flexible Pendant Mount)

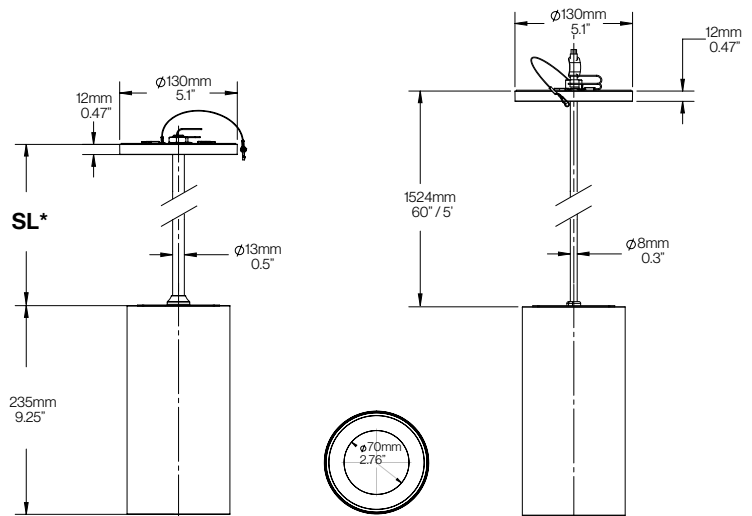

*SL- stem length
Available stem lengths for pendant mount: 12", 24", 36", and 48".



Photometric Summary

Selectable Watts		
Lumens (lm)	Watts (W)	Luminous Efficacy (lm/W)
1100	8.3	133
1400	10.5	133
1700	12.7	134
2100	15.2	138
2400	17.7	136
2700	20.4	132

MW


Driver (controls)

D1 0-10V Dimming 1%

CCT



Optics

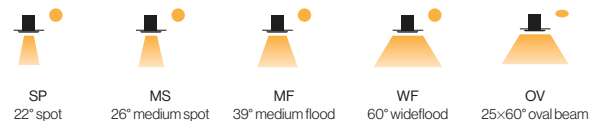

Lens Accessories




Voltage



CRI



Finishes for Housing / Baffle



Accessory Options

CD1B	Cord 10ft Black
CD1W	Cord 10ft White
CNB	Canopy Black
CNW	Canopy White
ST1B	Stem 12" Black
ST2B	Stem 24" Black
ST3B	Stem 36" Black
ST4B	Stem 48" Black
ST1W	Stem 12" White
ST2W	Stem 24" White
ST3W	Stem 36" White
ST4W	Stem 48" White

Project:			
Ordering info:			
Submitted by:		Date:	



Description

NEBULUM 4" Cylinder Series

Bringing the power of NEBULUM into a new form, the NBLM4-CYL Cylinder Series transforms the proven performance of the NBLM4 light engine into a sleek, surface, pendant, or wall-mounted solution for architectural spaces.

Built for spec-grade applications, NBLM4-CYL delivers up to 140lm/W efficiency, offering the same high-output, visually comfortable illumination as its recessed counterpart. Its clean cylindrical silhouette integrates seamlessly into open ceilings, vertical surfaces, and exposed structures, providing a modern lighting statement without compromising performance.

With precise beam control, modular configurations, and multiple mounting options, the NBLM4-CYL Series empowers designers to create unified lighting schemes across ceilings and walls—ideal for commercial interiors, galleries, retail, and hospitality spaces that demand both aesthetics and versatility.

Specifications

Housing material:	Extruded aluminum housing with Polyester powder painted finish.
Optics material:	The optic inside is a patterned clear acrylic material.
COB:	Fixed CCT, 90+CRI R9>50, 2 SDCM

Driver:	Standard Driver is field selectable wattage, 120-347V 0-10V Dimming to 1%
Baffle:	Die cast aluminum powder painted in colored finish.
Operating Ambient Temperature:	-20°C to 40°C

Ordering Guide Example: NBLM4-CYL/P-D1-UN3-MW-35K-90-MS-WH-WH-CG-CDW

NBLM4-CYL	P								
Family Name	Installation Mounting	Driver	Voltage	Output (no minal lumens)					
NBLM4-CYL	P Pendant Mount	D1 0-10V dimming 1%	UN3 120-347V	MW Selectable Watts					
				11L 8.3W 1100lm					
				14L 10.5W 1400lm					
				17L 12.7W 1700lm					
				21L 15.2W 2100lm					
				24L 17.7W 2400lm					
				27L 20.4W 2700lm					

	90								
CCT	CRI	Optics	Housing Colour	Baffle Colour	Lens Accessories				
30K 3000K	90	SP 22° Spot	WH White	WH White	CG Clear Glass				
35K 3500K		MS 26° Medium Spot	BK Black	BK Black	SG Solite Glass				
40K 4000K		MF 39° Medium Flood			FG Frosted Glass				
		WF 60° Wide Flood			LS Linear Spread				
		OV 25 x 60° Oval Beam			HL Hex Louver				

Others	
CDW	Cord 5ft Standard White with White Canopy
CDB	Cord 5ft Standard Black with Black Canopy



Note: White cord for White housing, and Black Cord for Black housing

Accessory Options	
CD1B	Cord 10ft Black
CD1W	Cord 10ft White
CNB	Canopy Black
CNW	Canopy White
ST1B	Stem 12" Black
ST2B	Stem 24" Black
ST3B	Stem 36" Black
ST4B	Stem 48" Black
ST1W	Stem 12" White
ST2W	Stem 24" White
ST3W	Stem 36" White
ST4W	Stem 48" White

Project:			
Ordering info:			
Submitted by:		Date:	



Exploded Overview

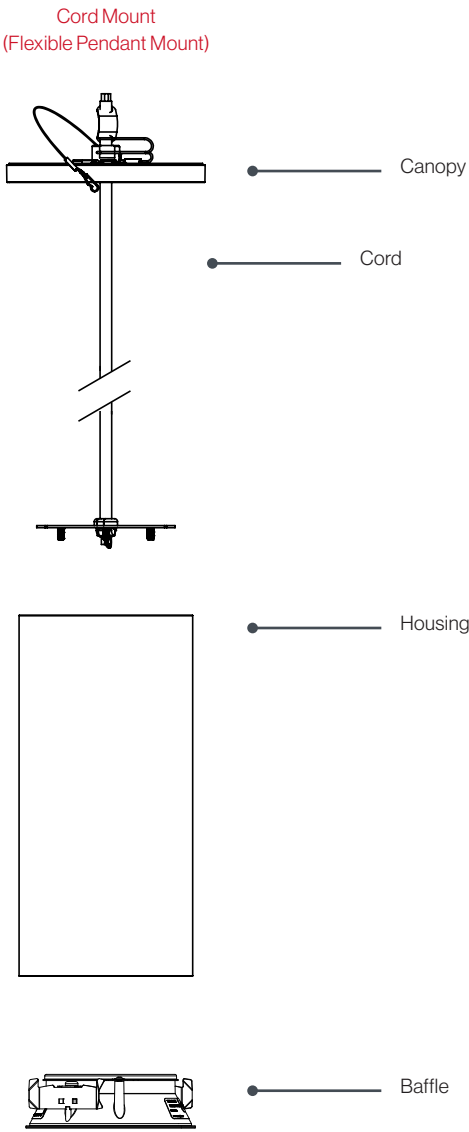
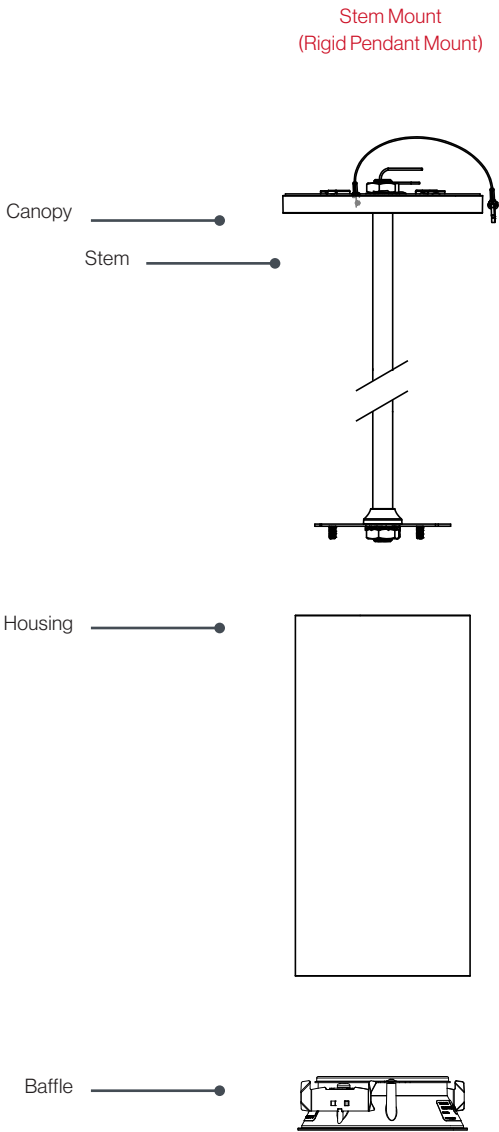


Project:			
Ordering info:			
Submitted by:		Date:	





Photometric Information



SP - 22° Spot, 4000K, 2100lm





MS - 26° Medium Spot, 4000K, 2100lm



MF - 39° Medium Flood, 4000K, 2100lm



WF - 60° Wide Flood, 4000K, 2100lm



OV - 25 x 60° Oval Beam, 4000K, 2100lm

