

Project:			
Ordering info:			
Submitted by:		Date:	




NEBULUM 4" Fixed Downlight

NBLM4




Fixed Engine

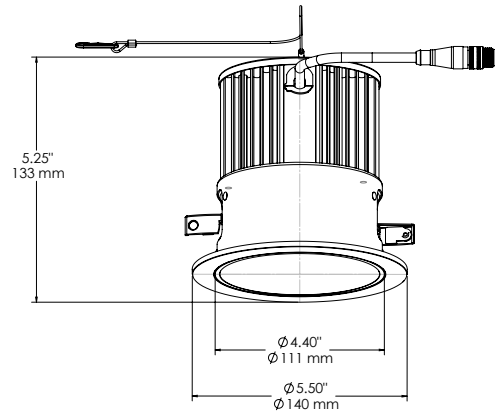

Complete Luminaire

Mounting
+
Engine
+
Baffles



Mounting

	L	W	H*
IC	18.1" 460mm	10.5" 266mm	5.5" 140mm
OF	18.1" 460mm	10.5" 266mm	5.5" 140mm
RM	14.2" 359mm	6.3" 160mm	5.5" 140mm

*Minimum ceiling depth



Baffle

Trimmed



Trimless



Photometric Summary

Selectable Watts			
	Lumens (lm)	Watts (W)	Luminous Efficacy (lm/W)
MW	1100	8.3	133
	1400	10.5	133
	1700	12.7	134
	2100	15.2	138
	2400	17.7	136
	2700	20.4	132
Fixed Watt			
	Lumens (lm)	Watts (W)	Luminous Efficacy (lm/W)
30L	3000	23.7	127
34L	3400	27.4	124
39L	3900	31.8	123

Driver (controls)

D1	0-10V Dimming 1%
S1	Signify 1% (only paired with Fixed Watt)

Mounting



IC
IC rated enclosure



OF
Open frame non-IC



RM
Remodel non-IC

CCT



30K 35K 40K

Voltage



120-347V 120-277V
(only paired with Fixed Watt)

CRI



90

Optics



SP 22° spot MS 26° medium spot MF 39° medium flood WF 60° wideflood OV 25x60° oval beam WW 22° wall wash

Finishes for Baffle / Trim



Trim Style



Trimmed

Trimless

Options



Emergency battery pack




Wet location


Project:			
Ordering info:			
Submitted by:		Date:	



Exploded Overview

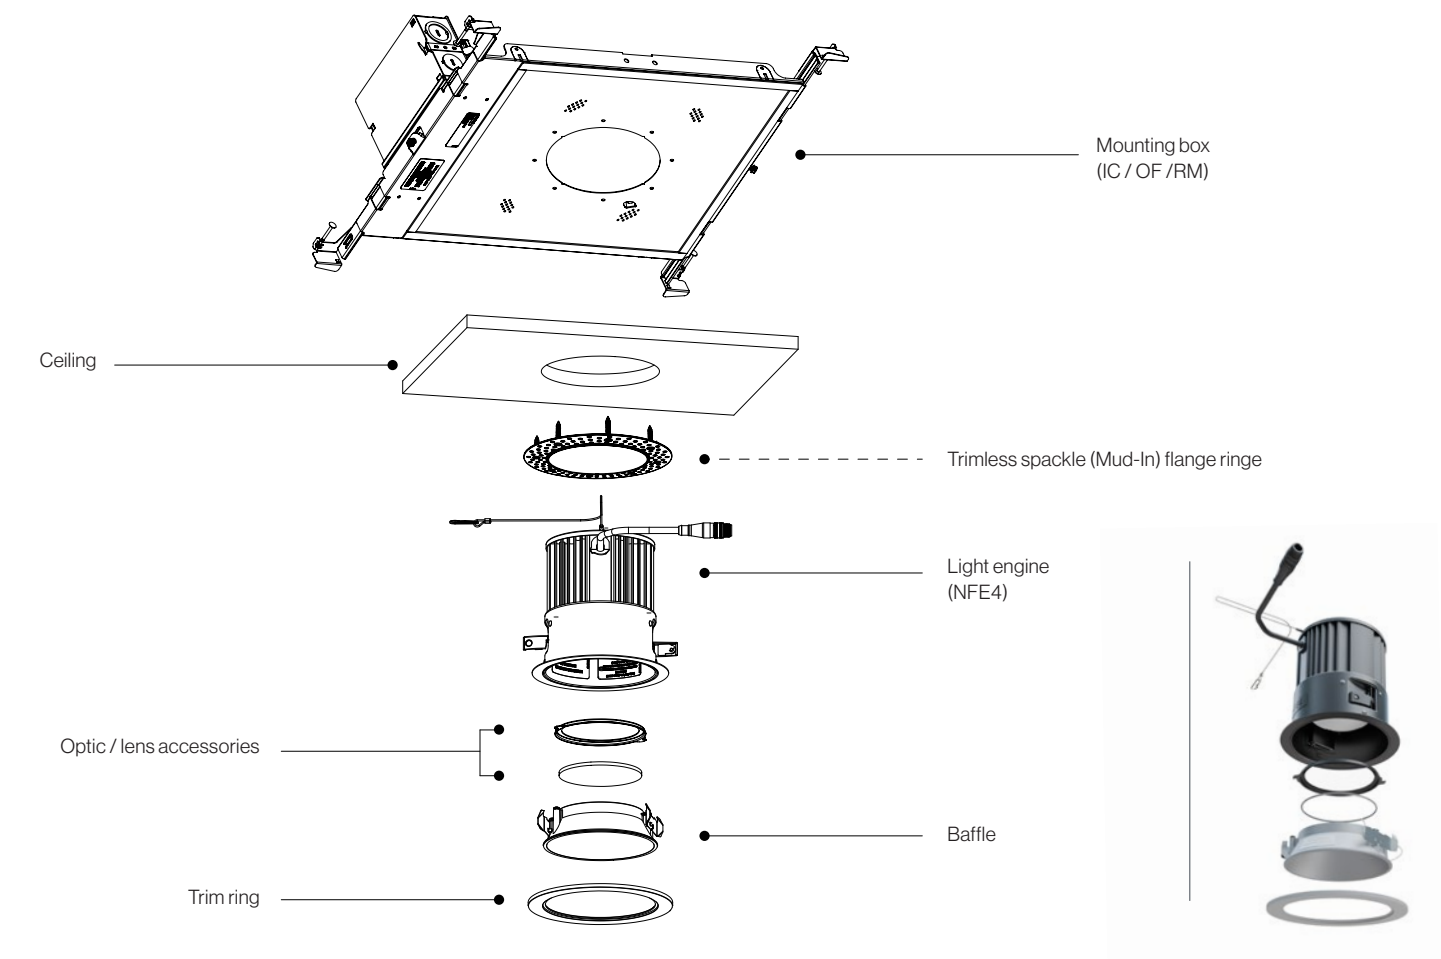

Ceiling Requirements

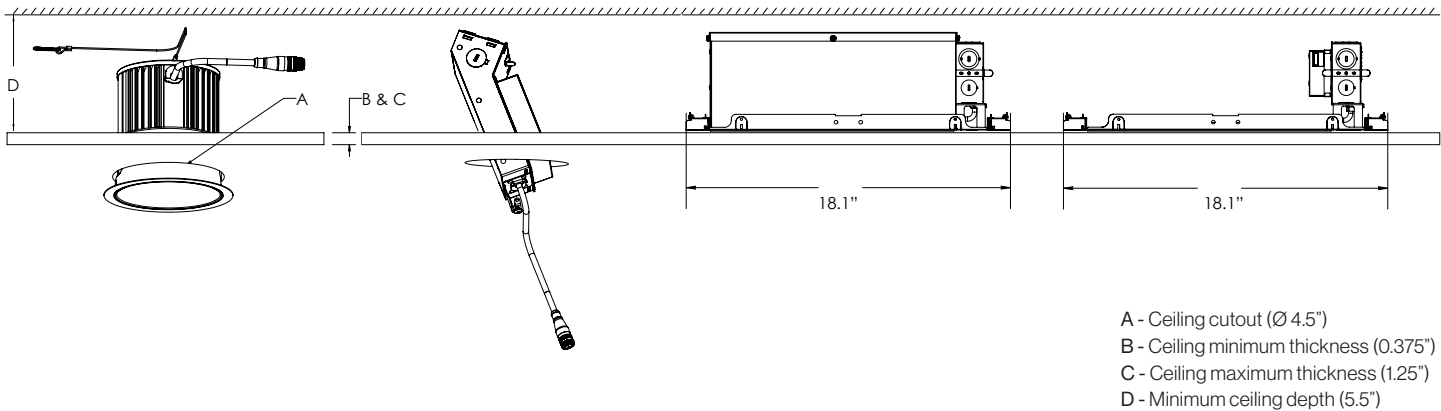

Project:			
Ordering info:			
Submitted by:		Date:	



Photometric Information

SP - 22° Spot, 4000K, 2100lm

