

# LED Backlit Panel



<b>PRO-BLP3</b>	<b>Segment</b>	<b>Wattage Range</b>	<b>Lumen Range</b>
	Commercial & Industrial	25W-50W	2,750-5,500lm

## Features

- Ultra Slim Backlit panel with 35mm fixture height.
- Smaller frame allows for a larger luminous area, strengthened Back Panel
- Damp Location rated with operating temperature range of -20 °C - + 40 °C.
- Selectable CCT (3500k, 4000k & 5000K) with Selectable Wattage in 1x4, 2x4 & 2x2 Variants
- Auto-Sensing 120-347V Driver, <\_ 10% Flicker
- Compatible with 0-10V Dimming
- cULus Listed

## Specifications

### Housing:

CRCA Steel back housing with Aluminum Frame

### Optics:

High Quality Translucent opal color diffuser

### Mounting:

Recessed and Suspended through Suspension Kit.

### Driver:

120-347V LED Auto-Sensing driver with Operating temperature range of -20 °C ~ +40 °C.

### LED:


Field Selectable CCT of 3500K, 4000K & 5000K. Efficacy of  $\geq 115$ lm/w.

### Controls:

0-10V Dimming




## Dimensional Drawing

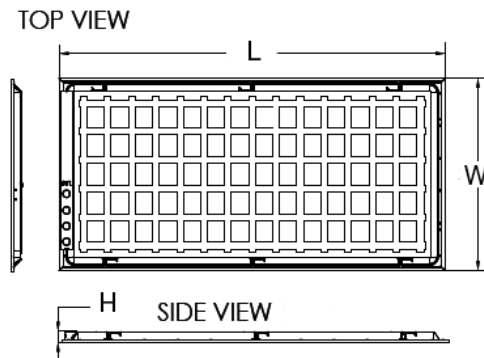

	L	W	H
2'x2'	23.75"	23.75"	1.38"
2'x4'	47.75"	23.75"	1.38"
1'x4'	47.75"	11.9"	1.38"

## Polar Candela

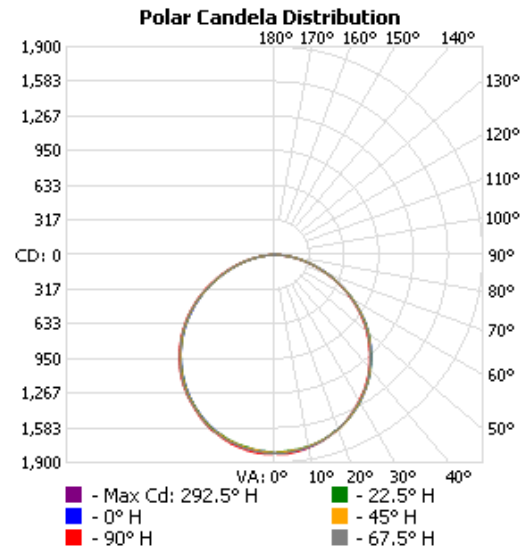

## Applications



Offices



Malls



Hospitals

# LED Backlit Panel



<b>PRO-BLP3</b>	<b>Segment</b>	<b>Wattage Range</b>	<b>Lumen Range</b>
	Commercial & Industrial	25W-50W	2,750-5,500lm

## Ordering Information Example: PRO-BLP3/22/MW/MK/120-347V/D

Family Name	Fixture Type	Size	Wattage	CCT	Voltage	Dimmable
PRO	BLP3 (LED Backlit panel)	22 (2'x2') 24 (2'x4') 14 (1'x4')	MW (Selectable Wattage)	MK (Selectable Kelvin)	120-347V	D (0-10V dimmable)

## Product Information

Ordering Code	DLC	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating (L70)	Beam Angle	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Damp Location	Case QTY.
3682243	-	PRO-BLP3/22/MW/MK/120-347V/D	40-30-25	120-347V	50,000	110	4400-3300-2750	35-40-50	>80	Yes	4
3682244	Yes	PRO-BLP3/24/MW/MK/120-347V/D	50-40-30	120-347V	50,000	110	5500-4400-3300	35-40-50	>80	Yes	4
3680384	-	PRO-BLP3/14/MW/MK/120-347V/D	40-30-25	120-347V	50,000	110	4400-3300-2750	35-40-50	>80	Yes	4
3660301	-	RGD-R/14/DWF	RIGID Recessed Drywall Frame Kit, 1x4								
3660300	-	RGD-R/22/DWF	RIGID Recessed Drywall Frame Kit, 2x2								
3660302	-	RGD-R/24/DWF	RIGID Recessed Drywall Frame Kit, 2x4								

## Related Products



SSL-ESC



RGD-SP3



DL-EC2



Running Man sign