LED Slim Panel

PRO-SP7	Segment	Wattage Range	Lumen Range
	Commercial & Residential	8W	750lm

TUROLIGHT®



Features

- Metal Ring
- TRIAC Dimmimg, 120V, CRI ≥ 80
- Back-lit slim profile suitable for low-depth installation.
- 5 field selectable CCT options (27K, 30K, 35K, 40K & 50K).
- Wet location rated (indoor) with operating temperature range of -20˚C ~ + 40˚C.
- IC-rated for direct contact with insulation.
- Quality PMMA white trim guaranteed against yellowing with our 5years warranty.

Specifications

Housing :
Special eco-designed body to ensure better Thermal Management.

Optics :
Premium-grade opal diffuser for even and glare-free light distribution.


Mounting :
Recessed Mounting with Spring Clamps.

Driver :
120V LED driver with Operating temperature range of -20˚C ~ +40˚C.

LED :
5 field selectable CCT options of 27K, 30K, 35K, 40K & 50K.


Controls :
TRIAC Dimming

Dimensional Drawing

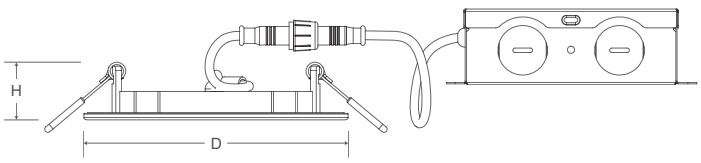

	D	Cut-out	H
SP7/4 (4")	4.92"	4.13"	1.07"

Polar Candela

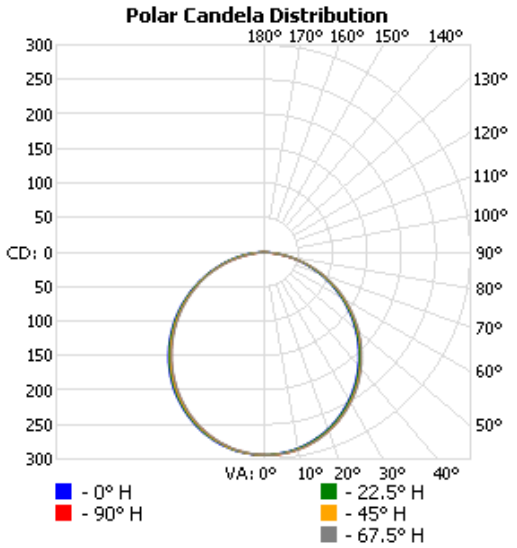

Applications

Offices | Malls | Hotels | Residences

LED Slim Panel

PRO-SP7	Segment	Wattage Range	Lumen Range
	Commercial & Residential	8W	750lm

Ordering Information Example: PRO-SP7/4/8W/MK5/120/WH/D

Family Name	Fixture Type	Size	Wattage	CCT	Voltage	Finish Color	Dimmable
PRO	SP7 (Slim Panel)	4 (4")	8W	MK5 (5 CCT Selectable)	120 (120V)	WH (White)	D (TRIAC Dimming)

Product Specification

Ordering Code	Energy Star	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Lumens (lumen)	CCT (K)	CRI	Beam Angle	Wet Location	Dimmable	Dimension D×H (inch)	Case QTY.
3662194	Yes	PRO-SP7/4/8W/MK5/120/WH/D	8W	120V	50,000	750	27/30/35/40/50	80	120°	Yes	Y	4.92" × 1.07"	5 packs (6 pcs/ pack)
3662195	Yes	PRO-SP7/SGL/4/8W/MK5/120/WH/D	8W	120V	50,000	750	27/30/35/40/50	80	120°	Yes	Y	4.92" × 1.07"	20 pcs (1 pc/ pack)
3660500	-	RGD-SP5/4/MK5/BK	RGD-SP5 4" Slim Panel, Black Trim Ring for 5-CCT Selectable										
3660501	-	RGD-SP5/4/MK5/BN	RGD-SP5 4" Slim Panel, Brush Nickel Trim Ring for 5-CCT Selectable										

Accessories

RGD-SP5/MK5/BK



RGD-SP5/MK5/BN

