



LED FIXTURE

SSL Series



LED Area Light SSL-AL2

Outstanding photometric performance, excellent uniform illumination, low profile construction, high efficacy and long lifespan, it's ideal for commercial lighting application.



100W & 150W

200W



240W & 300W



Features & Benefits

cULus listed, DLC Premium

120-347 Auto Sensing driver, 1-10V dimming

Lighting Efficiency 140lm/W

Optional installation of Slipfitter, Yoke, Trunnion and Pole Mount Mounting ordered separately

IES Type V, Type IV and Type III for optimized light distribution (Type III is default, Type V lens and Type IV lens ordered separately)

Cast aluminium design, Dark Bronze

5000K and 4000K available

CRI>80, L70 @ 50,000 Hrs

IP65 rated, wet location

Area light is complete with installed photocell receptacle and "Shorting Cap" for ease of photocell application if desired. Photocell is an option and sold separately.


Warranty

5-year limited warranty in commercial use from the date of purchase

Operating temperature range between -40°C and +45°C

Applications


Parks, Shopping Malls, Outlets, Parking Lots, Historical Sites, Road Lighting

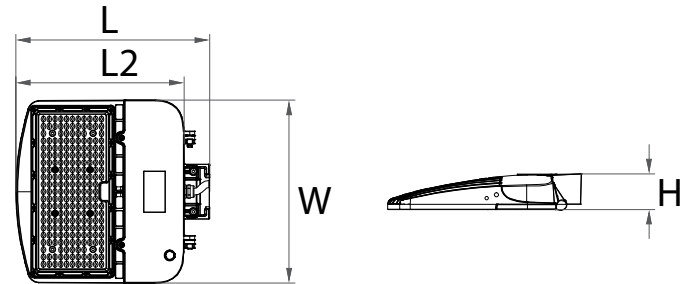

Ordering Information Example: SSL-AL2/T3/100W/40/120-347V/DB/D/SCR

Family Name	Fixture Type	Light Distribution Type	Wattage	CCT	Voltage (V)	Body Finish	Dimmable	Others	Options
SSL (Solid State Lighting)	AL2 (Area Lighter-AL2)	T3 (Type III)*	100W 150W 200W 240W 300W	40 (4000K) 50 (5000K)	120-347V	DB (Dark Bronze)	D (Dimmable)	SCR (shorting cap receptacle)	SSL-AL2/SSF-MTG/DB SSL-AL2/SQ-RD-POLE-MTG/DB SSL-AL2/TRUN-MTG/DB SSL-AL2/YOKEM-MTG/DB SSL-AL2/YOKEL-MTG/DB SSL-AL2/UNV-PC SSL-AL2/HVU-PC SSL-AL2/T4-S/LENSL SSL-AL2/T4-S/LENSM SSL-AL2/T5/LENSL SSL-AL2/T5/LENSM SSL-AL/WP/WC SSL-AL/WALL-MTG/DB

* Type III is default, you can order the optional lens separately for Type V (T5) and Type IV (T4).

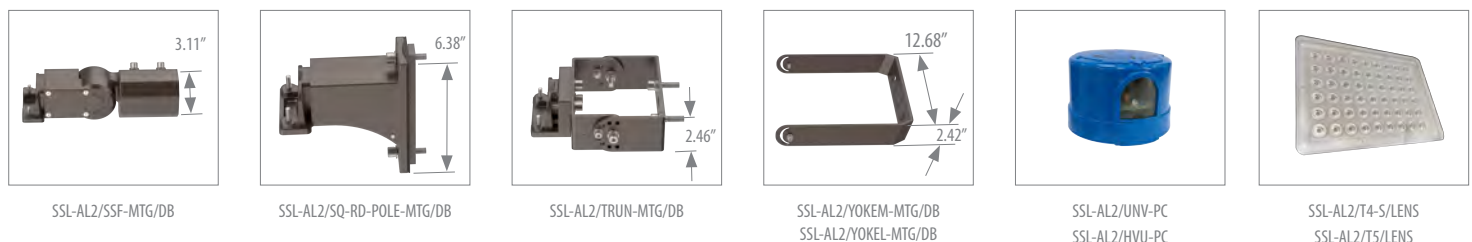

LED Area Light

SSL-AL2

Product Specification

Ordering Code	DLC Premium	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Optics/ Distribution	Initial Delivered Lumens (lm)	CCT (K)	CRI	Dimension L×W×H - L2 (inch)	Case QTY.
3666318	Y	SSL-AL2/T3/100W/40/120-347V/DB/D/SCR	100	120-347	50,000	Type III	14,000	4000	80	13.14 X 12.4 X 2.42 - 11.41	1
3666319	Y	SSL-AL2/T3/100W/50/120-347V/DB/D/SCR	100	120-347	50,000	Type III	14,000	5000	80	13.14 X 12.4 X 2.42 - 11.41	1
3667304	Y	SSL-AL2/T3/150W/40/120-347V/DB/D/SCR	150	120-347	50,000	Type III	21,000	4000	80	13.14 X 12.4 X 2.42 - 11.41	1
3667305	Y	SSL-AL2/T3/150W/50/120-347V/DB/D/SCR	150	120-347	50,000	Type III	21,000	5000	80	13.14 X 12.4 X 2.42 - 11.41	1
3667306	Y	SSL-AL2/T3/200W/40/120-347V/DB/D/SCR	200	120-347	50,000	Type III	28,000	4000	80	14.84 X 12.4 X 2.42 - 13.11	1
3667307	Y	SSL-AL2/T3/200W/50/120-347V/DB/D/SCR	200	120-347	50,000	Type III	28,000	5000	80	14.84 X 12.4 X 2.42 - 13.11	1
3667308	Y	SSL-AL2/T3/240W/40/120-347V/DB/D/SCR	240	120-347	50,000	Type III	33,600	4000	80	22.72 X 12.4 X 2.42 - 20.99	1
3667309	Y	SSL-AL2/T3/240W/50/120-347V/DB/D/SCR	240	120-347	50,000	Type III	33,600	5000	80	22.72 X 12.4 X 2.42 - 20.99	1
3668303	Y	SSL-AL2/T3/300W/40/120-347V/DB/D/SCR	300	120-347	50,000	Type III	42,000	4000	80	22.72 X 12.4 X 2.42 - 20.99	1
3668304	Y	SSL-AL2/T3/300W/50/120-347V/DB/D/SCR	300	120-347	50,000	Type III	42,000	5000	80	22.72 X 12.4 X 2.42 - 20.99	1
3660169		SSL-AL2/SSF-MTG/DB	Male Adjustable Slip Fitter, Dark Bronze (Fits 2 3/8" Tenon)								
3660170		SSL-AL2/SQ-RD-POLE-MTG/DB	Universal Male Straight Arm for Square/Round Pole, Dark Bronze								
3660172		SSL-AL2/TRUN-MTG/DB	Male Adjustable Trunnion Mounting, Dark Bronze								
3660174		SSL-AL2/YOKEM-MTG/DB	Yoke mounting, Dark Bronze (for 100W, 150W and 200W units)								
3660175		SSL-AL2/YOKEL-MTG/DB	Yoke mounting, Dark Bronze (for 240W and 300W units)								
3660177		SSL-AL2/UNV-PC	Photocell control (120-277V)								
3660178		SSL-AL2/HVU-PC	Photocell control (120-347V)								
3660179		SSL-AL2/T4-S/LENSSSL	SSL-AL2 Type IV Lens (for 100W, 150W, 240W and 300W units)								
3660180		SSL-AL2/T4-S/LENSM	SSL-AL2 Type IV Lens (for 200W unit)								
3660181		SSL-AL2/T5/LENSSSL	SSL-AL2 Type V Lens (for 100W, 150W, 240W and 300W units)								
3660182		SSL-AL2/T5/LENSM	SSL-AL2 Type V Lens (for 200W unit)								
3660084		SSL-AL/WP/WC	SSL-AL wire to wire connector IP68, 450VAC, GA, AWG 20-14 Black								
3660093		SSL-AL/WALL-MTG/DB	L-Shaped wall mounted bracket, Steel, Dark Bronze, Base W4"xH4", 2 3/8" O.D. tube, 8"H x 4" off-set								

Mounting Options

