

# LED FIXTURE

## RIGID Series



## LED Flush Mount (PC)

### RGD-FM2/MK/MS/PC (Multi-mode Sensor built-in)

Built-in Multi-mode sensor with easy one-switch control

Multi-Mode Sensor	S1	S2	S3
Hold time	10mins	20mins	20mins
Dim down to	50%	50%	30%
2nd Holdtime	10mins	n/a	n/a
2nd dim down	OFF	n/a	n/a

#### Hold Time:


This is the amount of time that the unit will be at 100% output when occupancy is detected..

#### Dim down to:

This is the percentage of light output that will be generated after the time limit of Hold Time has expired and no occupancy is detected.

#### 2nd Hold Time:

This is the amount of time (if applicable) that the unit will remain at the initial Dim level output after no occupancy is detected.

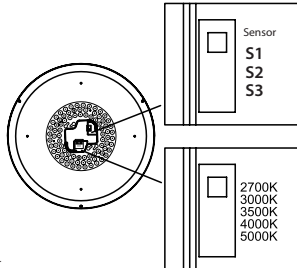

#### Features & Benefits

Built-in Multi-mode sensor with easy one-switch control

cETLus rated

Size 13" , CRI >90, 120° beam spread

L70@ 50,000 Hrs, Non-IC rated


PMMA diffuser, white finish, Frosted Polycarbonate Lens

Damp location rated

5-year limited warranty

Operating temperature range -20° C ~ +40° C

#### Dimensional Drawing

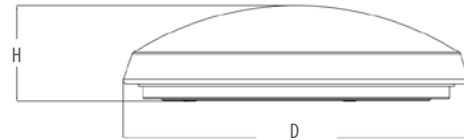

	M.O.D.	M.O.H.
RGD-FM2/13	3.29"	3.27"

#### Ordering Information Example: RGD-FM2/13/22W/MK/MS/PC

Family Name	Fixture Type	Wattage	CCT (Kelvin)	Dimmable	Body
RGD (Rigid)	FM2/13 (LED 13" flush mount, PC)	22W	MK (Multiple Kelvin)	MS (Multi-mode Sensor built-in)	PC (Polycarbonate)

#### Product Specification

Ordering Code	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Damp Location	M.O.D. (inch)	Dimmable	Case QTY.
3680114	RGD-FM2/13/22W/MK/MS/PC	22	120	50,000	1650	27-30-35-40-50	90	Yes	13	Y	6