

LED FIXTURE

RIGID Series



LED Flush Mount (PC) RGD-FM2/MW/MK/D/PC

Multiple wattage and multiple kelvin selection



5-year limited warranty

Operating temperature range -20 °C ~ +40 °C



Features & Benefits

cETLus rated

Size 11", 13" and 16" available

CRI >90, 120° beam spread


Triac dimming 10% Minimum

L70@ 50,000 Hrs, Non-IC rated

PMMA diffuser, white finish, Frosted Polycarbonate Lens

Damp location rated

Dimensional Drawing

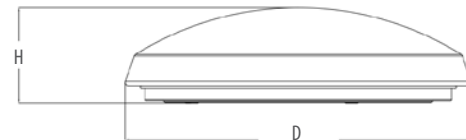

	M.O.D.	M.O.H.
RGD-FM2/11	10.6"	3.2"
RGD-FM2/13	12.0"	3.3"
RGD-FM2/15	14.1"	3.6"

Ordering Information Example: RGD-FM2/11/MW/MK/D/PC

Family Name	Fixture Type	Wattage	CCT (Kelvin)	Dimmable Option	Body
RGD (Rigid)	FM2/11 (LED 11" flush mount, PC) FM2/13 (LED 13" flush mount, PC) FM2/15 (LED 15" flush mount, PC)	MW (Multiple Wattage)	MK (Multiple Kelvin)	D (Dimmable)	PC (Polycarbonate)

Product Specification

Ordering Code	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Damp Location	M.O.D. (inch)	Dimmable	Case QTY.
3662191	RGD-FM2/11/MW/MK/D/PC	16-14-12	120	50,000	1200-1050-900	27-30-35-40-50	90	Yes	10.6	Y	6
3662192	RGD-FM2/13/MW/MK/D/PC	22-18-15	120	50,000	1650-1350-1150	27-30-35-40-50	90	Yes	12	Y	6
3662193	RGD-FM2/15/MW/MK/D/PC	24-21-18	120	50,000	1800-1600-1350	27-30-35-40-50	90	Yes	14.1	Y	6