

LED Recessed Swivel Downlight



RGD-JH2	Segment	Wattage Range	Lumen Range
	Commercial & Residential	9W	750lm

Features

- Slim Profile Aluminum body COB downlighter in black and white finish.
- Wet Location rated with operating temperature range of $-20^{\circ}\text{C} \sim +40^{\circ}\text{C}$. IC rated
- Field Selectable CCT (2700K, 3000K, 3500K, 4000K & 5000K) with 45° Beam angle & 90° Tilt Angle
- Eyeball design with 360° rotation and Excellent CRI of ≥ 90 .
- Metal trim to enhance the durability.

Specifications

Housing:

Pressure Die Cast Aluminum.

Optics:

Premium Grade PC Lens with 45° Beam angle.

Mounting:

Recessed Mounting with Spring Clamps.

Driver:

120V LED driver with Operating temperature range of $-20^{\circ}\text{C} \sim +40^{\circ}\text{C}$


LED:

Field Selectable CCT of 2700K, 3000K, 3500K, 4000K & 5000K. Efficacy of $\geq 83\text{lm/w}$.

Controls:

TRIAC Dimming


Dimensional Drawing

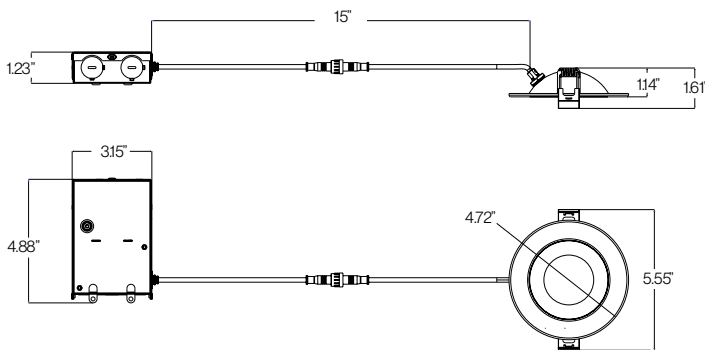

Hole cut-out size $\varnothing 4"$



Polar Candela

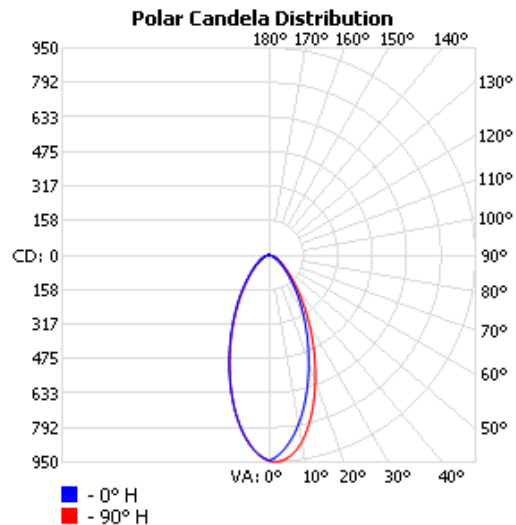

Applications



Offices



Malls



Hotels



Museums

LED Recessed Swivel Downlight



RGD-JH2	Segment	Wattage Range	Lumen Range
	Commercial & Residential	9W	750lm

Ordering Information Example: RGD-JH2/9W/5CCT/120V/WH/D

Family Name	Fixture Type	Wattage	CCT	Voltage	Finish Color	Dimmable
RGD (Rigid)	JH2 (LED recessed swivel downlight)	9W	5CCT (5CCT selectable)	120 V	WH (White) BK (Black)	D (TRIAC dimmable)

Product Information

Ordering Code	Energy Star	Model Number	Wattage (W)	Voltage (V)	Hour Rating	Lumens (lm)	CCT (K)	CRI	Wet Location	Dimension D (inch)*	Case QTY.
3662180	Yes	RGD-JH2/9W/5CCT/120V/WH/D	9	120	50,000	750	27/30/35/40/50	≥90	Yes	4.72"	10
3662181	Yes	RGD-JH2/9W/5CCT/120V/BK/D	9	120	50,000	750	27/30/35/40/50	≥90	Yes	4.72"	10

* Hole cut-out size Ø4"

Related Products



RGD-CDR



RGD-CHY2



PRO-SP6



RGD-HS