

# LED Slim Panel



<b>RGD-SP5</b>	<b>Segment</b>	<b>Wattage Range</b>	<b>Lumen Range</b>
	Commercial & Residential	9W-16W	750-1500lm

## Features

- TRIAC Dimming, 120V
- CRI ≥ 90
- Edge-lit slim profile suitable for low-depth installation.
- 5 field selectable CCT options (27K, 30K, 35K, 40K & 50K).
- Wet location rated (indoor) with operating temperature range of -20 °C ~ +40 °C.
- IC-rated for direct contact with insulation.
- Quality PMMA white metal trim guaranteed against yellowing with our 5 years warranty.

## Specifications

### Housing:

Pressure Die Cast Aluminum body to ensure better Thermal Management.

### Optics:

Premium-grade opal diffuser for even and glare-free light distribution.

### Mounting:

Recessed Mounting with Spring Clamps.

### Driver:

120V LED driver with Operating temperature range of -20 °C ~ +40 °C.

### LED:


5 field selectable CCT options of 27K, 30K, 35K, 40K & 50K.

### Controls:

TRIAC Dimming




## Dimensional Drawing

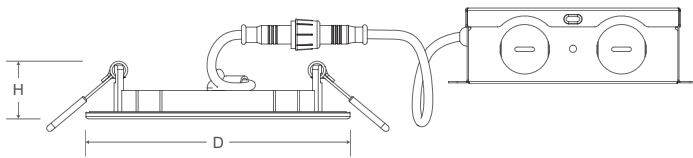

	D	Cut-out	H
SP5/4 (4")	4.92"	4.13"*	1.07"
SP5/6 (6")	6.93"	6.10"	1.30"
SP5/8 (8")	8.86"	8.27"	1.30"

\*4" driver box dimension is 3.5" x 3.5" x 1.19"

## Polar Candela

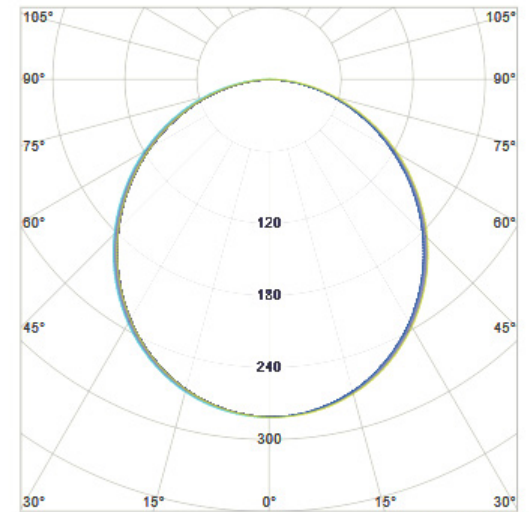

Beam angle: 109.9°

LOR: 100%

— C0/C180  
— C90/C270

## Applications



Offices



Malls



Hotels



Residences

# LED Slim Panel



<b>RGD-SP5</b>	<b>Segment</b>	<b>Wattage Range</b>	<b>Lumen Range</b>
	Commercial & Residential	9W-16W	750-1500lm

## Ordering Information Example: RGD-SP5/4/9W/MK5/WH/D

Family Name	Fixture Type	Size	Wattage	CCT	Finish Color	Dimmable
RGD (Rigid)	SP5 (Slim Panel)	4 (4") 6 (6") 8 (8")	9W 12W 16W	MK5 (5 CCT Selectable)	WH (White) BK (Black)	D (TRIAC Dimming)

## Product Specification

Ordering Code	Energy Star	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Lumens (lumen)	CCT (K)	CRI	Beam Angle	Wet Location	Dimmable	Dimension D×H (inch)	Case QTY.
3662197	Yes	RGD-SP5/4/9W/MK5/WH/D	9	120V	50,000	750	27/30/35/40/50	90	120°	Yes	Y	4.92" × 1.07"	20
3662198	-	RGD-SP5/6/12W/MK5/WH/D	12	120V	50,000	1000	27/30/35/40/50	90	120°	Yes	Y	6.93" × 1.30"	6
3662278	-	RGD-SP5/6/12W/MK5/BK/D	12	120V	50,000	1000	27/30/35/40/50	90	120°	Yes	Y	6.93" × 1.30"	6
3662199	-	RGD-SP5/8/16W/MK5/WH/D	16	120V	50,000	1500	27/30/35/40/50	90	120°	Yes	Y	8.86" × 1.30"	6
3660273	-	RGD-SP3/4/MK5/BK	4" Slim Panel, Black Trim Ring										
3660274	-	RGD-SP3/4/MK5/BN	4" Slim Panel, Brushed Nickel Trim Ring										
3660277	-	RGD-SP3/8/MK5/BK	8" Slim Panel, Black Trim Ring										
3660278	-	RGD-SP3/8/MK5/BN	8" Slim Panel, Brushed Nickel Trim Ring										

## Accessories

Black Trim Ring



Brushed Nickel Trim Ring

