

LED Wall Sconce Light

RGD-WS2



5-year limited warranty

Operating temperature range -20 °C ~ +40 °C



Features & Benefits

Highly rust-resistant and durable aluminum housing.

UV resistant plastic lens delivers smooth illumination.

Corrosion and heat resistance powder coated finish.


5CCT selectable (27K-30K-35K-40K-50K), High CRI (90+)

Smooth dimming capabilities ranging from 100% to 10%.

Quick and simple installation

Wet location rated and suitable for severe weather conditions.

Dimensional Drawing

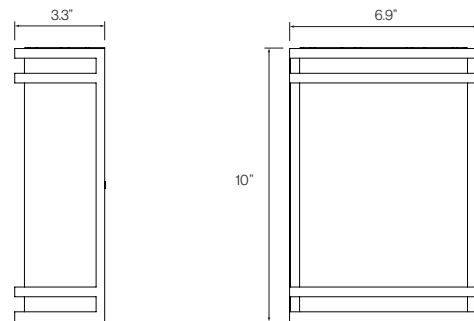

Ordering Information Example: RGD-WS2/15W/MK9/D/2R/BN

Family Name	Fixture Type	Wattage	CCT	Dimmable	Type	Finish
RGD (Rigid)	WS2 (Wall Sconce Light)	15W	MK9 (5CCT Selectable, CRI90)	D (Dimmable)	2R (2 Ring)	BK (Black) BN (Brush Nickel)

Product Specification

Ordering Code	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lm)	CCT (K)	CRI	Wet Location	M.O.D. L×W×H (inch)	Case QTY.
3663135	RGD-WS2/15W/MK9/D/2R/BK	15	120	50,000	1100	27-30-35-40-50	90	Yes	6.9 × 10 × 3.3	6
3663136	RGD-WS2/15W/MK9/D/2R/BN	15	120	50,000	1100	27-30-35-40-50	90	Yes	6.9 × 10 × 3.3	6