

Select-Backlit Panel



SEL-BLP	Segment	Wattage Range	Lumen Range
	Commercial & Industrial	50-20W	5,750-2,300lm

The SEL-BLP delivers versatile performance in a slim, backlit design built for commercial and light industrial spaces. With field-selectable wattage and color temperature, this panel offers flexibility at the job site. High efficacy up to 115 lm/W and 120-347V compatibility make it ideal for energy-conscious installations. Certified for DLC Standard - Low Bay, the SEL-BLP is ready for rebate programs and reliable long-term use.

Features

- Field-selectable CCT: 3500K / 4000K / 5000K
- Field-selectable wattage: 20/30/40W or 30/40/50W
- Up to 115 lm/W; DLC Standard & Low Bay 120-347V universal input
- 0-10V dimming (dimming range driver-dependent)
- 50,000 hr (L70) lifetime
- Sizes: 2'x2', 1'x4', 2'x4', IP20, damp location rated
- Recessed or suspended mounting
- UL Certified for Canada

Key Specifications

Housing:

CRCA Steel back housing with Aluminum Frame

Optics:

High Quality Translucent opal color diffuser

Mounting:

Recessed and Suspended through Suspension Kit.

Driver:

120-347V LED Auto-Sensing driver with Operating temperature range of -20 °C-+40 °C.



LED:

Field Selectable CCT of 3500K, 4000K & 5000K. Efficacy of ≥ 115 lm/w.


Controls:

0-10V Dimming

Dimensional Drawing

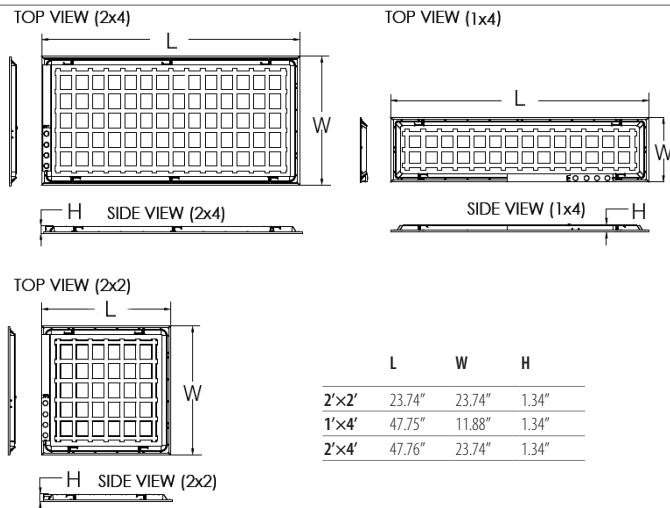

Polar Candela

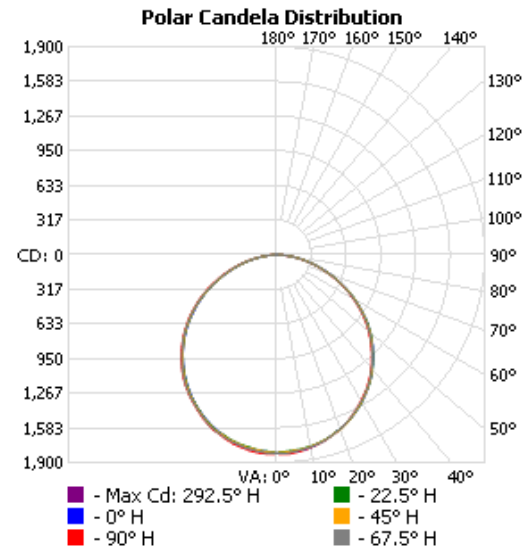

Applications



Commercial Offices



Educational Institutions



Retail Stores



Hospitality

Select-Backlit Panel



SEL-BLP	Segment	Wattage Range	Lumen Range
	Commercial & Industrial	50-20W	5,750-2,300lm

Ordering Information Example: SEL-BLP/24/MW/MK/120-347/D

Family Name	Fixture Type	Size	Wattage	CCT	Voltage	Dimmable
SEL (Select)	BLP (LED Backlit panel)	22 (2'x2') 14 (1'x4') 24 (2'x4')	MW (Selectable Wattage)	MK (Selectable Kelvin)	120-347V	D (0-10V dimmable, 100%-1%)

Product Information

Ordering Code	DLC Standard	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating (L70)	Beam Angle	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Damp Location	Case QTY.
3680393	Yes	SEL-BLP/22/MW/MK/120-347V/D	40-30-20	120-347	50,000	113	4600-4350-2300	35-40-50	>80	Yes	4
3680394	Yes	SEL-BLP/14/MW/MK/120-347V/D	40-30-20	120-347	50,000	113	4600-4350-2300	35-40-50	>80	Yes	4
3680395	Yes	SEL-BLP/24/MW/MK/120-347V/D	50-40-30	120-347	50,000	113	5750-4600-3450	35-40-50	>80	Yes	4
3660300	-	RGD-R/22/DWF	Recessed Drywall Frame Kit, 2x2								
3660301	-	RGD-R/14/DWF	Recessed Drywall Frame Kit, 1x4								
3660302	-	RGD-R/24/DWF	Recessed Drywall Frame Kit, 2x4								

DLC Certification

Ordering #	Model Number	Primary Use	DLC Standard	DLC Premium
3680394	SEL-BLP/14/MW/MK/120-347V/D	Low-Bay Luminaires for Commercial and Industrial Buildings	S-9Y72RS	-
3680393	SEL-BLP/22/MW/MK/120-347V/D	Low-Bay Luminaires for Commercial and Industrial Buildings	S-MZ3BPT	-
3680395	SEL-BLP/24/MW/MK/120-347V/D	Low-Bay Luminaires for Commercial and Industrial Buildings	S-ZS6P60	-