

LED Doorway Light



SSL-DW3	Segment	Wattage Range	Lumen Range
	Universal	30-9W	4,200-1,260lm

Features

- Modern design compact wallpack with glass diffuser for long life.
- IP65 wet location rated with operating temperature range of -40 °C ~ + 50 °C.
- Field selectable (CCT 3000K, 4000K & 5000K) and selectable wattage
- Efficacy of ≥ 140 lm/W with 120-277V UNV LED driver



Specifications

Housing:

Pressure Die Cast Aluminum body to ensure better Thermal Management.

Optics:

UV Resistant Glass Cover

Mounting:

Surface Mounting

Driver:

120-277 V UNV LED driver with Operating temperature range of -40 °C ~ + 50 °C

LED:


Field Selectable CCT of 3000K, 4000K & 5000K. Efficacy of ≥ 140 lm/w.

Controls:


Compatible with 0-10V Dimming, Photocell Sensor.



Dimensional Drawing

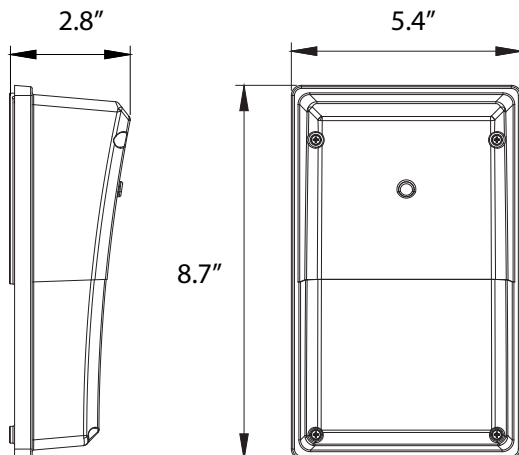

Polar Candela

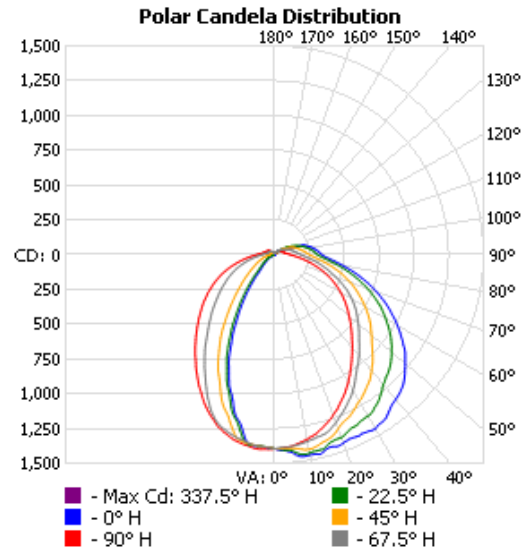

Applications



Malls



Hotels



Industry



Office Complex

LED Doorway Light



SSL-DW3	Segment	Wattage Range	Lumen Range
	Universal	30-9W	4,200-1,260lm

Ordering Information Example: SSL-DW3/15S/MK/UNV/PC/DB

Family Name	Fixture Type	Wattage	CCT	Voltage	Photocell	Finish
SSL (Solid state lighting)	DW3 (LED doorway light)	15S/MW (Selectable Wattage, Max. 15W) 30L/MW (Selectable Wattage, Max. 30W)	MK (Selectable Kelvin/CCT)	UNV (120-277V)	PC (Default)	DB (Dark bronze) BK (Black) WH (White)

Product Specification

Ordering Code	DLC Premium	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Wet Location	Dimension L×W×H(inch)	Case QTY.
3662238	Yes	SSL-DW3/15S/MK/UNV/PC/DB	15-12-9	120-277V	50,000	2100-1680-1260	30-40-50	≥80	Yes	8.7 X 5.4 X 2.8	10
3662237	Yes	SSL-DW3/30L/MW/MK/UNV/PC/DB	30-25-20	120-277V	50,000	4200-3500-2800	30-40-50	≥80	Yes	8.7 X 5.4 X 2.8	10
3662236	Yes	SSL-DW3/30L/MW/MK/UNV/PC/BK	30-25-20	120-277V	50,000	4200-3500-2800	30-40-50	≥80	Yes	8.7 X 5.4 X 2.8	10
3682266	Yes	SSL-DW3/30L/MW/MK/UNV/PC/WH	30-25-20	120-277V	50,000	4200-3500-2800	30-40-50	≥80	Yes	8.7 X 5.4 X 2.8	10

DLC Certification

Ordering #	Model Number	Primary Use	DLC Standard	DLC Premium
3662238	SSL-DW3/15S/MK/UNV/PC/DB	Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires	-	S-QKW6ZB
3662237	SSL-DW3/30L/MW/MK/UNV/PC/DB	Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires	-	S-WNPYM2
3662236	SSL-DW3/30L/MW/MK/UNV/PC/BK	Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires	-	S-WNPYM2
3682266	SSL-DW3/30L/MW/MK/UNV/PC/WH	Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires	-	S-WNPYM2