

LED Mini Flood



SSL-MFL2	Segment	Wattage Range	Lumen Range
	Commercial & Residential	30W-150W	4,500-21,000lm

Features

- Slim & Compact LED Flood Light with Tempered Glass Lens.
- IP65 Wet Location rated with operating temperature range of -30 °C ~ + 450C.
- Field Selectable (CCT 3000K, 4000K & 5000K) and wattage of 30 – 150 W with 60M, 100L and 150XL Models
- Efficacy of upto 140 lm/W with Lumiled LED
- 120-347V LED Auto-Sensing driver with Photocell
- CRI>80, L70 @ 50,000 Hrs



Specifications

Housing:

Pressure Die Cast Aluminum Housing for exceptional performance and Long Life

Optics:

Clear Tempered Glass Lens

Mounting:

Suitable for surface Mounting

Driver:

120-347V LED Auto-Sensing driver

LED:


Selectable 30-40-50K CCT with Efficacy of upto 140lm/w

Controls:

Compatible with 0-10V Dimming




Dimensional Drawing

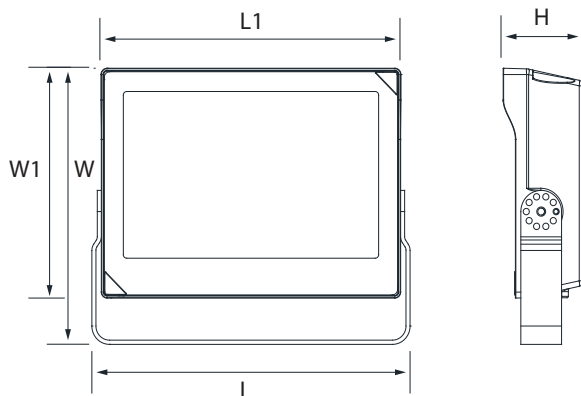

	L	W	H	L1	W1
MFL2/60M	9.21"	7.68"	2.28"	8.70"	6.42"
MFL2/100L	10.94"	8.86"	2.72"	10.28"	7.52"
MFL2/150XL	12.17"	9.69"	2.87"	11.46"	8.30"

Polar Candela

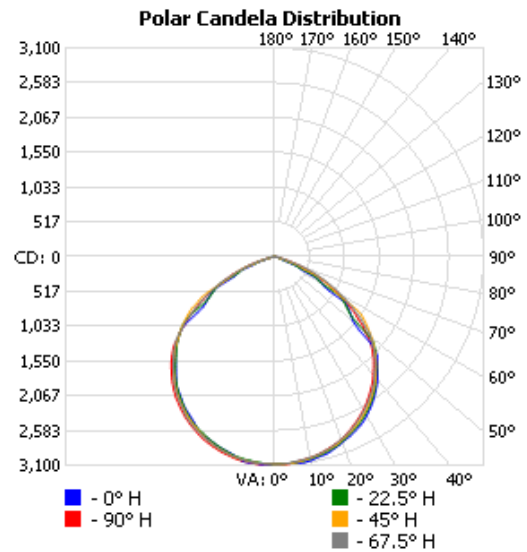

Applications



Schools



Stadium



Shopping Plaza



Outdoor Parking Lots

LED Mini Flood



SSL-MFL2	Segment	Wattage Range	Lumen Range
	Commercial & Residential	30W-150W	4,500-21,000lm

Ordering Information Example: SSL-MFL2/100L/MW/MK/120-347V/BK

Family Name	Fixture Type	Wattage	CCT (Kelvin)	Voltage	Finish
SSL (Solid state lighting)	MFL2 (LED Mini Flood)	60M/MW (Max.60W, Selectable Wattage) 100L/MW (Max.100W, Selectable Wattage) 150XL/MW (Max.150W, Selectable Wattage)	MK (Selectable Kelvin/ CCT)	120-347V	BK (Black)

Product Information

Ordering Code	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	Optics/ Distribution	CCT (K)	CRI	Wet Location	Case QTY.
3682111	SSL-MFL2/60M/MW/MK/120-347V/BK	60-50-30	120-347V	50,000	8400-7000-4500	115° x 100°	30-40-50	≥80	Yes	10
3682110	SSL-MFL2/100L/MW/MK/120-347V/BK	100-80-70	120-347V	50,000	14000-11200-9800	115° x 100°	30-40-50	≥80	Yes	5
3682254	SSL-MFL2/150XL/MW/MK/120-347V/BK	150-130-120	120-347V	50,000	21000-18200-16800	115° x 100°	30-40-50	≥80	Yes	5
3660312	SSL-MFL2/KNC/BRACKET/100L-150XL	SSL MFL2, 100L & 150XL Knuckle Bracket								
3660311	SSL-MFL2/KNC/BRACKET/60M	SSL MFL2, 60M Knuckle Bracket								

Related Products



SSL-AL3



SSL-WP1TS



SSL-DW2



EDA-BOL