

# LED Sports Light



<b>SSL-SL5</b>	<b>Segment</b>	<b>Wattage Range</b>	<b>Lumen Range</b>
	Commercial & Industrial	300W- 1000W	4,5000-156,000lm

The SSL-SL5 delivers volumetric lighting and reducing glare.

## Features

- Aesthetically Designed Sports Lighter with Pressure Die Cast Aluminum Housing.
- Separate Driver Housing for better thermal management.
- Efficacy of 150 lm/w with UN3 (120-347V) Auto-Sensing Driver.
- Field Selectable Wattage and 50K CCT
- IP66, Wet Location Rated with L70 @ 50,000 Hrs
- Compatible with 0-10V Dimming, 20KV SPD
- Remote Driver Capability.
- Preinstalled Zhaga Base for Turosmart compatibility.
- Comes with Visor and Yoke Mount for ease of installation.

## Key Specifications

### Housing :

Pressure Die Cast Aluminum Housing in Black finish.

### Optics :

Premium Grade Polycarbonate Diffuser.

### LED PCB :

Aluminum Based MCPCB for Long Life

### Driver :

LED Auto Sensing driver with Operating temperature range of -40 °C ~ +45 °C



### LED :

5000K CCT with Efficacy of 150lm/w


### Controls :

0-10V Dimming

## Dimensional Drawing

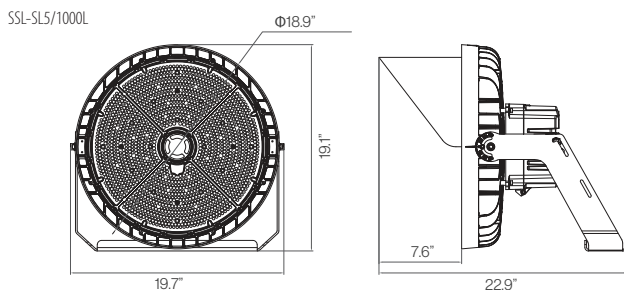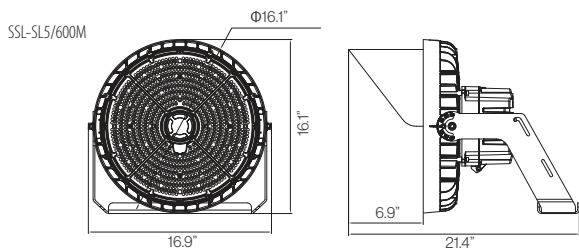

## Polar Candela

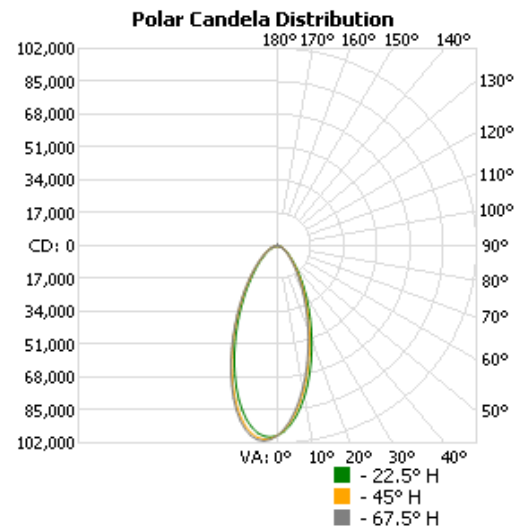

## Applications



Community Sports Field



Parks



Golf Course

# LED Sports Light



<b>SSL-SL5</b>	<b>Segment</b>	<b>Wattage Range</b>	<b>Lumen Range</b>
	Commercial & Industrial	300W- 1000W	4,5000-156,000lm

## Ordering Information Example: SSL-SL5/600M/MW/50K/UN3/40D/S

Family Name	Fixture Type	Wattage	CCT	Voltage	Beam Angle	Options
SSL (Solid State Lighting)	SL5 (Sports Light)	600M/MW (Max.600W, Selectable Wattage) 1000L/MW (Max.1000W, Selectable Wattage)	50K (5000K)	UN3 (120-347V)	40D (40°)	S (Sensor Receptacle)

## Product Information

Ordering Code	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Delivered Lumens (lumen)	CCT (K)	Optics / Distribution	CRI	Dimming	Case QTY.
3662248	SSL-SL5/600M/MW/50K/UN3/40D/S	600-500-400-300	120-347	50,000	90000-75000-60000-45000	5000	25°/ 60°/ 80°, Default 40°	>70	0-10V	1
3662249	SSL-SL5/1000L/MW/50K/ UN3/40D/S	1000-900-800-700	120-347	50,000	156000-135000-120000-105000	5000	25°/ 60°/ 80°, Default 40°	>70	0-10V	1
3660483	SSL-SL5/600M/LENS/25DEG	SSL-SL5/600M , 25 degree Lens								
3660484	SSL-SL5/600M/LENS/60DEG	SSL-SL5/600M , 60 degree Lens								
3660485	SSL-SL5/600M/LENS/80DEG	SSL-SL5/600M , 80 degree Lens								
3660486	SSL-SL5/1000L/LENS/25DEG	SSL-SL5/1000L , 25 degree Lens								
3660487	SSL-SL5/1000L/LENS/60DEG	SSL-SL5/1000L , 60 degree Lens								
3660488	SSL-SL5/1000L/LENS/80DEG	SSL-SL5/1000L , 80 degree Lens								
3660489	SSL-SL5/REMOTE/DRIVER/KIT	SSL-SL5 Sports Lighter Remote Driver kit								
3660490	SSL-SL5/REMOTE/DRIVER/CABLE/40FT	SSL-SL5 Remote Driver Cable 40FT								
3660491	SSL-SL5/REMOTE/DRIVER/CABLE/50FT	SSL-SL5 Remote Driver Cable 50FT								
3660492	SSL-SL5/LASER/SCOPE/L	SSL-SL5 Laser Pointer								

