

# LED FIXTURE

SSL Series



## LED Glass Wall Pack SSL-WP1T+

Impact Resistant Tempered Glass lens, 120-347V auto-sensing driver, built-in Photo-cell with On/Off Switch Selectable wattage and selectable kelvin selection



5-year limited warranty


Operating temperature range -40° C ~ +40° C



### Features & Benefits

- cULus listed, DLC Premium
- 120-347V auto sensing driver, 0-10V dimming
- Selectable CCT (30K/40K/50K), selectable wattage
- Built-in Photocell with On/Off Switch
- Junction box or wall mounted directly
- Die-cast aluminum with durable dark bronze or black coat finish
- L70 @ 50,000 Hrs, CRI≥80
- IP 65, wet location rated

### Dimensional Drawing

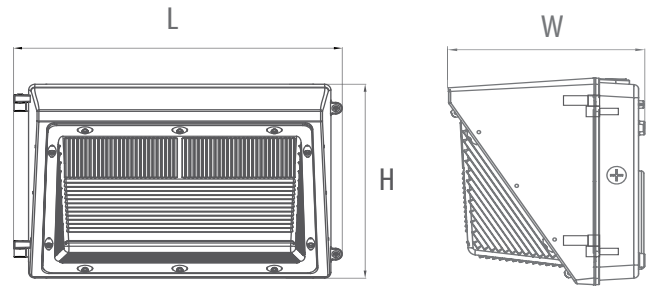

### Ordering Information Example: SSL-WP1T+/60M/MW/MK/120-347V/D/DB

Family Name	Fixture Type	Wattage	CCT	Voltage	Dimmable	Finish
SSL (Solid state lighting)	WP1T+ (LED glass wall pack)	60M/MW (Max. 60W Selectable Wattage) 120XL/MW (Max. 120W Selectable Wattage)	MK (Selectable Kelvin/CCT)	120-347V	D (Dimmable)	DB (Dark bronze) BK (Black)

### Product Specification

Ordering Code	DLC Premium	Model Number	Wattage (W)	Input Voltage (V)	L70-Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Wet Location	Dimension L×W×H(inch)	Case QTY.
3682247	Y	SSL-WP1T+/60M/MW/MK/120-347V/D/DB	60-50-40-30	120-347V	50,000	8700-7250-5800-4350	30-40-50	≥80	Yes	14.3"×9"×7.8"	2
3682248	Y	SSL-WP1T+/120XL/MW/MK/120-347V/D/BK	120-105-90-75	120-347V	50,000	17400-15225-13050-10875	30-40-50	≥80	Yes	14.3"×9"×7.8"	2
3682249	Y	SSL-WP1T+/120XL/MW/MK/120-347V/D/DB	120-105-90-75	120-347V	50,000	17400-15225-13050-10875	30-40-50	≥80	Yes	14.3"×9"×7.8"	2

### DLC Certification

Ordering #	Model Number	Primary Use	DLC Standard	DLC Premium
3682247	SSL-WP1T+/60M/MW/MK/120-347V/D/DB	Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires	-	S-185MTX
3682249	SSL-WP1T+/120XL/MW/MK/120-347V/D/DB	Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires	-	S-R306VC
3682248	SSL-WP1T+/120XL/MW/MK/120-347V/D/BK	Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires	-	S-X1JZZX