

LED Adjustable Wall Pack



SSL-WP2T+	Segment	Wattage Range	Lumen Range
	Universal	Selectable Wattage (15W-75W)	1,950-9,750lm

Features

- Modern Design Compact Wallpack with Impact Resistant Tempered Glass diffuser for long life & trouble free operation.
- Wet Location rated with operating temperature range of -40 °C - +50 °C.
- Field Selectable (CCT 3000K, 4000K & 5000K) and wattage (15W - 30W in 30M & 40W – 75W in 75L model).
- Efficacy of ≥ 130 lm/W with 120-347V LED Auto-Sensing driver
- Built-in Photocell

Specifications

Housing:

Pressure Die Cast Aluminum body to ensure better Thermal Management.

Optics:

UV Resistant Glass Cover with Type III light distribution

Mounting:

Surface Mounting

Driver:

Auto-sensing 120-347 V LED driver with Operating temperature range of -40 °C ~ +50 °C

LED:

Field Selectable CCT of 3000K, 4000K & 5000K. Efficacy of ≥ 130 lm/w.

Controls:


Compatible with 0-10V Dimming




Head adjustable 0° ~ 90°



Dimensional Drawing

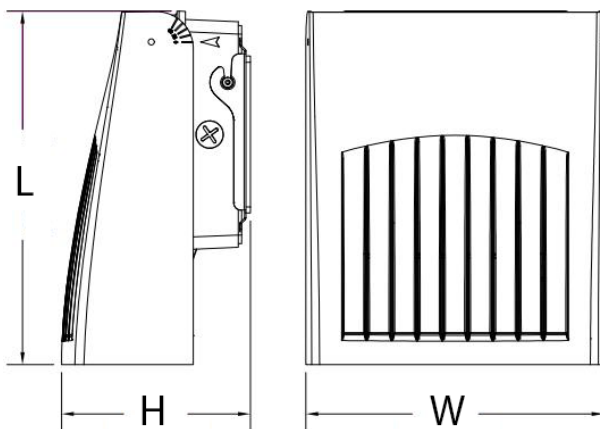

Polar Candela

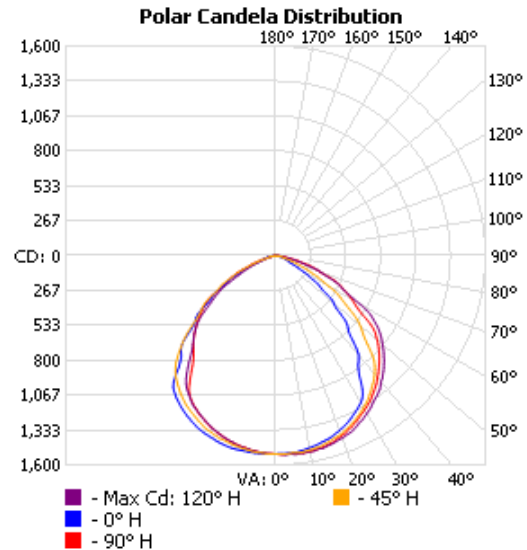

Applications



Malls



Hotels



Residences



Office Complex

LED Adjustable Wall Pack



SSL-WP2T+	Segment	Wattage Range	Lumen Range
	Universal	Selectable Wattage (15W-75W)	1,950-9,750lm

Ordering Information Example: SSL-WP2T+/30M/MW/MK/120-347V/D/DB

Family Name	Fixture Type	Wattage	CCT	Voltage	Dimmable	Finish
SSL (Solid state lighting)	WP2T+(LED adjustable wall pack)	30M (Max. 30W Selectable Wattage) 75L (Max. 75W Selectable Wattage)	MK (Selectable Kelvin/CCT)	120-347V	D (Dimmable)	DB (Dark bronze) BK (Black)

Product Specification

Ordering Code	DLC Premium	Model Number	Wattage (W)	Input Voltage (V)	L70-Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Wet Location	Dimension LxWxH(inch)	Case QTY.
3682250	Y	SSL-WP2T+/30M/MW/MK/120-347V/D/BK	30-24-20-15	120-347V	50,000	4350-3480-2900-2175	30-40-50	≥70	Yes	7.8" x 4.9" x 6.6"	4
3682251	Y	SSL-WP2T+/30M/MW/MK/120-347V/D/DB	30-24-20-15	120-347V	50,000	4350-3480-2900-2175	30-40-50	≥70	Yes	7.8" x 4.9" x 6.6"	4
3682252	Y	SSL-WP2T+/75L/MW/MK/120-347V/D/BK	75-60-50-40	120-347V	50,000	10875-8700-7250-5800	30-40-50	≥70	Yes	11.3" x 6" x 9.5"	2
3682253	Y	SSL-WP2T+/75L/MW/MK/120-347V/D/DB	75-60-50-40	120-347V	50,000	10875-8700-7250-5800	30-40-50	≥70	Yes	11.3" x 6" x 9.5"	2

DLC Certification

Ordering #	Model Number	Primary Use	DLC Standard	DLC Premium
3682251	SSL-WP2T+/30M/MW/MK/120-347V/D/DB	Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires	-	S-1ZVMS2
3682253	SSL-WP2T+/75L/MW/MK/120-347V/D/DB	Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires	-	S-HXSSZN
3682250	SSL-WP2T+/30M/MW/MK/120-347V/D/BK	Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires	-	S-X37GW8
3682252	SSL-WP2T+/75L/MW/MK/120-347V/D/BK	Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires	-	S-YTXKJX

Related Products



RGD-CDR



RGD-CHY2



PRO-SP5



RGD-HS