

# LED Full Cutoff Wall Pack



<b>SSL-WP3T+</b>	<b>Segment</b>	<b>Wattage Range</b>	<b>Lumen Range</b>
	Commercial & Industrial	Selectable Wattage (25W-120W)	3,350-16,080lm

## Features

- Modern Design Compact Wallpack with Glass diffuser for long life.
- IP65 Wet Location rated with operating temperature range of -40 °C ~ +50 °C.
- Field Selectable (CCT 3000K, 4000K & 5000K) and wattage (25W - 60W in 60M & 80W - 120W in 120L model).
- Efficacy of  $\geq 134$  lm/W with 120-347V LED Auto-Sensing driver



## Specifications

### Housing:

Pressure Die Cast Aluminum body to ensure better Thermal Management.

### Optics:

UV Resistant Glass Cover

### Mounting:

Surface Mounting

### Driver:

Auto-sensing 120-347 V LED driver with Operating temperature range of -40 °C ~ +50 °C

### LED:


Field Selectable CCT of 3000K, 4000K & 5000K. Efficacy of  $\geq 134$ lm/w.

### Controls:


Compatible with 0-10V Dimming, Photocell Sensor.



## Polar Candela

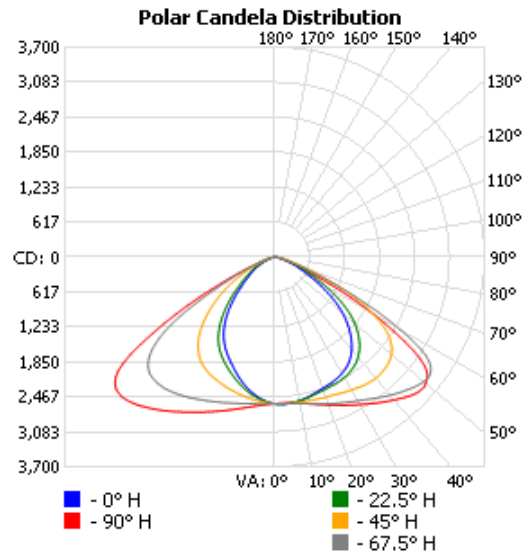

## Dimensional Drawing

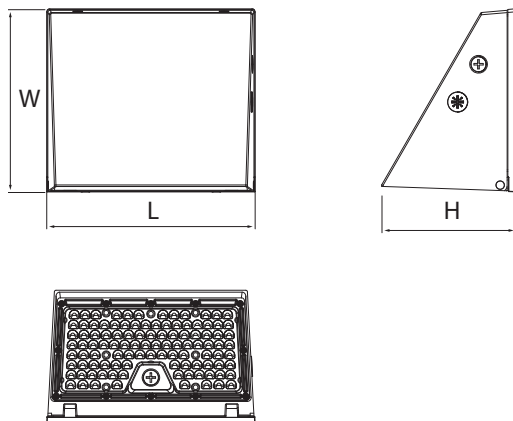

	L	W	H
SSL-WP3T+/60M	10.63"	9.33"	6.85"
SSL-WP3T+/120L	13.27"	9.33"	8.11"

## Applications



Malls



Hotels



Industry



Office Complex

# LED Full Cutoff Wall Pack



<b>SSL-WP3T+</b>	<b>Segment</b>	<b>Wattage Range</b>	<b>Lumen Range</b>
	Commercial & Industrial	Selectable Wattage (25W-120W)	3,350-16,080lm

## Ordering Information Example: SSL-WP3T+/60M/MW/MK/120-347V/D/PC/DB

Family Name	Fixture Type	Type	Wattage	CCT	Voltage	Dimmable	Photocell	Finish
SSL (Solid state lighting)	WP3T+ (LED full cutoff wall pack)	60M (Max. 60W, medium size) 120L (Max. 120W, large size)	MW (Selectable Wattage)	MK (Selectable Kelvin/CCT)	120-347V	D (Dimmable)	PC (Photocell)	DB (Dark bronze) BK (Black) WH (White)

## Product Specification

Ordering Code	DLC Premium	Model Number	Wattage (W)	Input Voltage (V)	L70-Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Wet Location	Dimension L×W×H(inch)	Case QTY.
3680385	Y	SSL-WP3T+/60M/MW/MK/120-347V/D/PC/DB	60-40-25	120-347V	50,000	8040-5360-3350	30-40-50	≥80	Yes	10.63"×9.33"×6.85"	1
3682264	Y	SSL-WP3T+/60M/MW/MK/120-347V/D/PC/BK	60-40-25	120-347V	50,000	8040-5360-3350	30-40-50	≥80	Yes	10.63"×9.33"×6.85"	1
3680386	Y	SSL-WP3T+/120L/MW/MK/120-347V/D/PC/DB	120-100-80	120-347V	50,000	16080-13400-10720	30-40-50	≥80	Yes	13.27"×9.33"×8.11"	1
3680387	Y	SSL-WP3T+/120L/MW/MK/120-347V/D/PC/BK	120-100-80	120-347V	50,000	16080-13400-10720	30-40-50	≥80	Yes	13.27"×9.33"×8.11"	1
3682260	Y	SSL-WP3T+/120L/MW/MK/120-347V/D/PC/WH	120-100-80	120-347V	50,000	16080-13400-10720	30-40-50	≥80	Yes	13.27"×9.33"×8.11"	1

## DLC Certification

Ordering #	Model Number	Primary Use	DLC Standard	DLC Premium
3680385	SSL-WP3T+/60M/MW/MK/120-347V/D/PC/DB	Outdoor Full-Cutoff Wall-Mounted Area Luminaires	-	S-ZW2B06
3682264	SSL-WP3T+/60M/MW/MK/120-347V/D/PC/BK	Outdoor Full-Cutoff Wall-Mounted Area Luminaires	-	S-ZW2B06
3680386	SSL-WP3T+/120L/MW/MK/120-347V/D/PC/DB	Outdoor Full-Cutoff Wall-Mounted Area Luminaires	-	S-WDJR42
3680387	SSL-WP3T+/120L/MW/MK/120-347V/D/PC/BK	Outdoor Full-Cutoff Wall-Mounted Area Luminaires	-	S-WDJR42
3682260	SSL-WP3T+/120L/MW/MK/120-347V/D/PC/WH	Outdoor Full-Cutoff Wall-Mounted Area Luminaires	-	S-WDJR42