

LED FIXTURE

TL Series



LED Emergency Light TL-EM001-Plus

Twin head LED emergency light



2-year limited warranty

Operating temperature range -10 °C ~ +40 °C



Features & Benefits

Injection-molded thermoplastic housing

Input voltage 120/347V

Ni-cd battery backup for 2 hrs

2W x 2 SMD LED adjustable heads

Universal (wall, ceiling) mounting


Test switch and charge indicator light

UL-94V-0 flame rating, fire-retardant

IP20, damp location rated

CSA – C22.2 No. 141

Dimensional Drawing

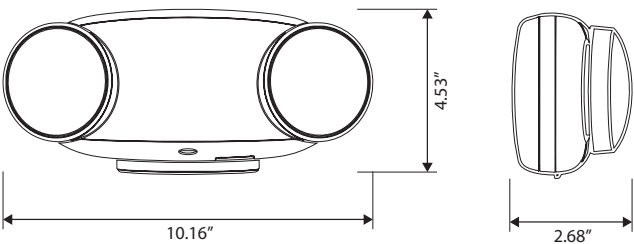

Ordering Information Example: TL-EM001-Plus

Family Name	Fixture Type	Model	Version
TL (Turolight)	EM (Emergency light)	001 (Twin head LED emergency light, self powered)	Plus (High output version)

Product Specification

Ordering Code	Model Number	Description	Wattage (W)	Input Voltage (V)	CCT (K)	Hour Rating	CRI	Lumens	Mounting	Remote Capable	Self Powered Battery	Damp Location	Dimensions L×W×H (inch)	Case QTY.
3465141	TL-EM001-Plus	Twin head LED emergency, Ni-cd battery backup for 2 hours	4	120/347	6500	50,000	82	200	Wall, ceiling	No	Yes (2 hrs)	Yes	10.16"×4.53"×2.68"	12