



LED PL lamps - Universal Position

VIV-PL/HY/5CCT/G24q/DUO



5-year limited warranty

Operating temperature range: -20°C to +40°C

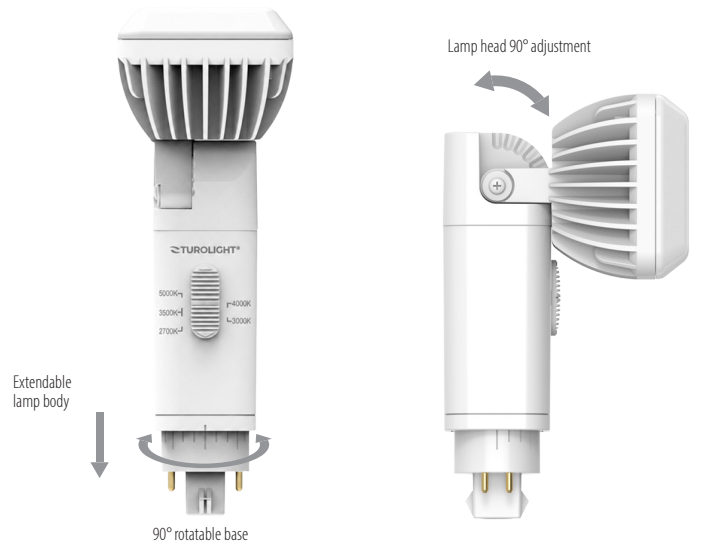

Features & Benefits

HY wiring configuration supports both Type A (refer to ballast compatibility list) and Type B (ballast bypass) operation.

Duo installation — horizontal and vertical mounting via rotatable lamp head.


Extendable lamp body with 90° rotatable base for precise positioning across various fixture types.

cUL listed for damp locations

50,000-hour lifespan (L70)

5-year warranty (sockets or ballasts older than 5 years must be replaced to qualify)

Dimensional Drawing

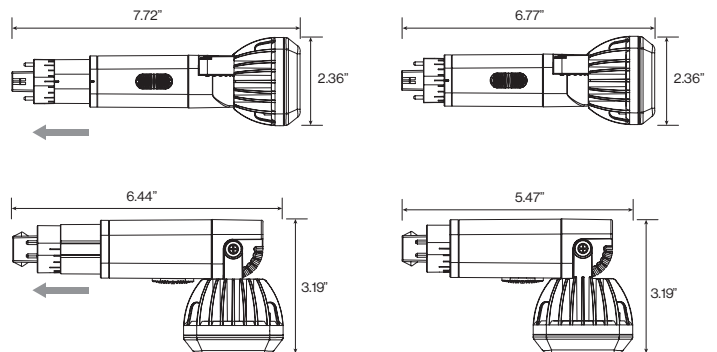

Ordering Information Example: VIV-PL/HY/9W/5CCT/G24q/DUO

Family Name	Lamp Type	Wattage	CCT	Base	Installation
VIV (Vivid Series)	PL/HY (PL Hybrid)	9W	5CCT (Selectable 5 CCT)	G24q	DUO (Dual Orientation – Horizontal & Vertical)

Product Specification

Ordering Code	Model Number	Wattage (W)	Base	Voltage (V)	Hour Rating	Beam Angle	Initial Lumens (lm)	CCT(K)	CRI	Damp Location	Dimmable	Case QTY.
1752253	VIV-PL/HY/9W/5CCT/G24q/DUO	9	G24q	120-277	50,000	120°	1100	27/30/35/40/50	80	Yes	×	50