

Project:			
Ordering info:			
Submitted by:		Date:	



<b>Linear Wall Luminaire</b> <b>ZNTH60-WD (Direct)</b> <b>ZNTH60-WDI (Direct/Indirect)</b>	WD	Wattage Range 24-79W	Lumen Range 3,262-11,000lm	Efficacy 138lm/W	Light Performance 816-1,375lm/ft													
	WDI	Wattage Range ↓25-79W   ↑21-70W	Lumen Range ↓3,380-10,869lm   ↑2,839-9,631lm	Efficacy 136lm/W	Light Performance ↓ 826-1,359lm/ft   ↑ 710-1,204lm/ft													
	<b>3CCT Selectagle</b> 3000K 3500K 4000K																	
	<b>Finishes</b> Black White																	
		<table border="1"> <thead> <tr> <th></th> <th>L</th> <th>W</th> <th>H</th> </tr> </thead> <tbody> <tr> <td>4FT</td> <td>1200mm 47.24"</td> <td>60mm 2.36"</td> <td>85mm 3.35"</td> </tr> <tr> <td>8FT</td> <td>2390mm 94.09"</td> <td>60mm 2.36"</td> <td>85mm 3.35"</td> </tr> </tbody> </table>				L	W	H	4FT	1200mm 47.24"	60mm 2.36"	85mm 3.35"	8FT	2390mm 94.09"	60mm 2.36"	85mm 3.35"		
	L	W	H															
4FT	1200mm 47.24"	60mm 2.36"	85mm 3.35"															
8FT	2390mm 94.09"	60mm 2.36"	85mm 3.35"															

**Ordering Guide Example: ZNTH60-WD/4/F/05L/MK3/80/UN3/D1/B**

Family/ Series	Mounting	Function	Length	Diffuser Direct	Diffuser Indirect	Max Total Lumens	CCT 30/35/40K	CRI	Voltage	Driver	Housing Finish
ZNTH60	W Wall	D Direct	4 4ft	F Frosted	- -	05L 5000 (4ft)	MK3	80	UN3 120-347V	D1 0-10V Dim 1%	W White B Black C Custom
			8 8ft			10L 10000 (8ft)					
		DI Direct/Indirect	4 4ft	F Frosted	F Frosted	10L 10000 (4ft)					
			8 8ft			20L 20000 (8ft)					

**Light Outputs**

Catalogue Code	Voltage	Dimension			CCT	Efficacy lm/W	CRI	Direct			UP Light			
		L	W	H				Watts	Delivered Lumens	Lumens per foot	Watts	Delivered Lumens	Lumens per foot	
ZNTH60-WD/4	120-347V	47.24"	2.36"	3.35"	30K-35K-40K	130	80+	39	5300	1325	-			
								32	4349	1087	-			
								24	3262	816	-			
ZNTH60-WD/8	120-347V	94.09"	2.36"	3.35"	30K-35K-40K	130	80+	79	11000	1375	-			
								63	8772	1097	-			
								48	6684	836	-			
ZNTH60-WDI/4	120-347V	47.24"	2.36"	3.35"	30K-35K-40K	130	80+	39	5273	1318	32	4327	1082	
								32	4327	1082	26	3515	879	
								25	3380	845	21	2839	710	
ZNTH60-WDI/8	120-347V	94.09"	2.36"	3.35"	30K-35K-40K	130	80+	79	10869	1359	70	9631	1204	
								63	8668	1084	58	7980	998	
								48	6604	826	46	6329	791	

Project:	
Ordering info:	
Submitted by:	Date:



### Specifications

<b>Housing:</b>	The Zenith60 housing is constructed of extruded aluminum 6063T5.	<b>Power Feed:</b>	The unit comes complete with 18/5 STW 600V rated power cable (White or Black) preinstalled with internal quick connect. For row mounting the power feed is easily removed where not needed.
<b>End Caps:</b>	Die cast aluminum fastened to housing with internal fasteners.	<b>LED:</b>	Name brand LED with long life offered in standard 80+CRI. On board selectable CCT offers maximum flexibility (3000K/3500K/4000K).
<b>Optics:</b>	Frosted polycarbonate snap in lens with Lambertian distribution.	<b>Finish:</b>	Polyester powder painted finish
<b>Driver:</b>	LED drivers are contractor wattage selectable and universal 120-347V input (up to 3 different outputs – see output chart). Less than 20%THD and 0-10V dimmable down to 1%. The drivers of the Direct/Indirect units can be adjusted independently of each other allowing maximum flexibility.		<b>[Joiner Kit is included with fixture, to be used for Row Mounting.]</b>

### Model & Ordering Information

Ordering Code	DLC Premium	Model Number	Description	Case QTY
3695010	Yes	ZNTH60-WD/4/F/10L/MK3/80/UN3/D1/B	4Ft., Direct, Selectable 40-33-25W, Selectable 30-35-40K, 120-347V, 0-10V Dim 1%, Black Finish.	4
3695011	Yes	ZNTH60-WD/4/F/10L/MK3/80/UN3/D1/W	4Ft., Direct, Selectable 40-33-25W, Selectable 30-35-40K, 120-347V, 0-10V Dim 1%, White Finish.	4
3696009	Yes	ZNTH60-WD/8/F/20L/MK3/80/UN3/D1/B	8Ft., Direct, Selectable 80-66-50W, Selectable 30-35-40K, 120-347V, 0-10V Dim 1%, Black Finish.	2
3696010	Yes	ZNTH60-WD/8/F/20L/MK3/80/UN3/D1/W	8Ft., Direct, Selectable 80-66-50W, Selectable 30-35-40K, 120-347V, 0-10V Dim 1%, White Finish.	2
3695012	Yes	ZNTH60-WDI/4/F/10L/MK3/80/UN3/D1/B	4Ft., Direct/Indirect, Selectable 40-33-25W, Selectable 30-35-40K, 120-347V, 0-10V Dim 1%, Black Finish.	4
3695013	Yes	ZNTH60-WDI/4/F/10L/MK3/80/UN3/D1/W	4Ft., Direct/Indirect, Selectable 40-33-25W, Selectable 30-35-40K, 120-347V, 0-10V Dim 1%, White Finish.	4
3696011	Yes	ZNTH60-WDI/8/F/20L/MK3/80/UN3/D1/B	8Ft., Direct/Indirect, Selectable 80-66-50W, Selectable 30-35-40K, 120-347V, 0-10V Dim 1%, Black Finish.	2
3696012	Yes	ZNTH60-WDI/8/F/20L/MK3/80/UN3/D1/W	8Ft., Direct/Indirect, Selectable 80-66-50W, Selectable 30-35-40K, 120-347V, 0-10V Dim 1%, White Finish.	2
3690005	-	ZNTH60-BP	Emergency Battery Pack	-
3690004	-	ZNTH60-K4	Joiner Kit, for Row mounting.	-

### DLC Certification


Ordering Code	Model Number	Primary Use	DLC Standard	DLC Premium
3695010	ZNTH60-WD/4/F/10L/MK3/80/UN3/D1/B	Low-Bay Luminaires for Commercial and Industrial Buildings	-	S-ZZN39T
3695011	ZNTH60-WD/4/F/10L/MK3/80/UN3/D1/W	Low-Bay Luminaires for Commercial and Industrial Buildings	-	S-ZZN39T
3696009	ZNTH60-WD/8/F/20L/MK3/80/UN3/D1/B	High-Bay Luminaires for Commercial and Industrial Buildings	-	S-XT2LXB
3696010	ZNTH60-WD/8/F/20L/MK3/80/UN3/D1/W	High-Bay Luminaires for Commercial and Industrial Buildings	-	S-XT2LXB
3695012	ZNTH60-WDI/4/F/10L/MK3/80/UN3/D1/B	Direct Linear Ambient Luminaires	-	S-MNHPHS
3695013	ZNTH60-WDI/4/F/10L/MK3/80/UN3/D1/W	Direct Linear Ambient Luminaires	-	S-MNHPHS
3696011	ZNTH60-WDI/8/F/20L/MK3/80/UN3/D1/B	Direct Linear Ambient Luminaires	-	S-8XSTBG
3696012	ZNTH60-WDI/8/F/20L/MK3/80/UN3/D1/W	Direct Linear Ambient Luminaires	-	S-8XSTBG

Project:			
Ordering info:			
Submitted by:		Date:	




**Mounting**


Mounting centers location

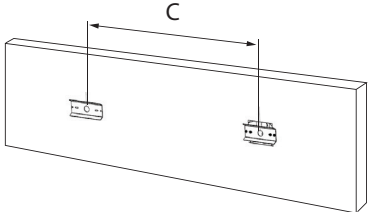

	C
4FT	695mm 27.36"
8FT	1885mm 74.21"

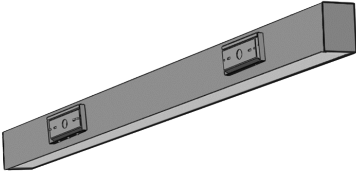

Place luminaire hang onto wall brackets



Adjust the level slightly by screws in the bottom and secure in place.

