



Key Features

- Adjustable Neck Design
- Energy Star Listed
- Suitable for type IC, type Non-IC and Air Tight Housings
- 8.5W replaces 45W incandescent
- 12W replaces 65W incandescent
- 19W replaces 120W incandescent
- Dimmable
- High CRI (80+)
- 25,000 hour average life
- 8.5W adjustable 3", 3.5" and 4"
- 12W, 19W adjustable 4", 5" and 6"
- Indoor - Suitable for Damp Locations

8.5W/
12W/19W
Replaces 45W/
65W/120W

RoHS
COMPLIANT

UL
LISTED





Applications


- Art galleries and museums
- Hospitality and Residential
- Shopping Malls
- Accent / display lightings
- Restaurants
- Kitchens
- Homes

Other information

- Operating temperature range between -20°C and +45°C
- UL/cUL listed, RoHS compliant
- 3-year limited warranty in commercial and residential use

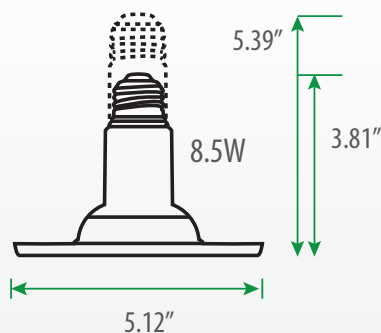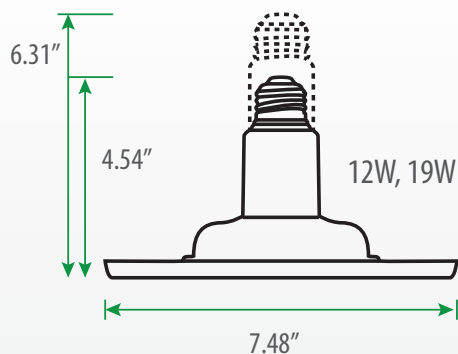

Dimensions

Order Code	Model Number	ES	Watts	Base	Volts	Hour Rating	Beam Angle	Initial Lumens	CCT (K)	CRI	M.O.D. (inch)	M.O.L. (inch)	QTY (box/pc)
1762181	VIV-RK/RF/8.5W/27/D (2PK)		8.5	E26	120	25,000	115°	500	2700	80	5.12	3.81 - 5.39	8/16
1762727	VIV-RK/RF/8.5W/30/D (2PK)		8.5	E26	120	25,000	115°	500	3000	80	5.12	3.81 - 5.39	8/16
1762817	VIV-RK/RF/8.5W/40/D (2PK)		8.5	E26	120	25,000	115°	500	4000	80	5.12	3.81 - 5.39	8/16
1762519	VIV-RK/RF/8.5W/50/D (2PK)		8.5	E26	120	25,000	115°	500	5000	80	5.12	3.81 - 5.39	8/16
1762182	VIV-RK/RF/12W/27/D (2PK)		12	E26	120	25,000	110°	800	2700	80	7.48	4.54 - 6.31	8/16
1762728	VIV-RK/RF/12W/30/D (2PK)		12	E26	120	25,000	110°	800	3000	80	7.48	4.54 - 6.31	8/16
1762818	VIV-RK/RF/12W/40/D (2PK)		12	E26	120	25,000	110°	800	4000	80	7.48	4.54 - 6.31	8/16
1762520	VIV-RK/RF/12W/50/D (2PK)		12	E26	120	25,000	110°	800	5000	80	7.48	4.54 - 6.31	8/16
1763115	VIV-RK/RF/19W/27/D (2PK)		19	E26	120	25,000	110°	1400	2700	80	7.48	4.54 - 6.31	8/16
1763233	VIV-RK/RF/19W/30/D (2PK)		19	E26	120	25,000	110°	1400	3000	80	7.48	4.54 - 6.31	8/16
1763435	VIV-RK/RF/19W/40/D (2PK)		19	E26	120	25,000	110°	1400	4000	80	7.48	4.54 - 6.31	8/16
1763514	VIV-RK/RF/19W/50/D (2PK)		19	E26	120	25,000	110°	1400	5000	80	7.48	4.54 - 6.31	8/16

How to read: VIV - RK / RF / 8.5W / 30 / D
LED Class Retrofit Kit Retroflex Wattage CCT(K) Dimmable



Step1
Screw in lamp into E26 lamp holder in recessed housing



Step2
Adjust the lamp into recessed housing and fit for installation

How to Install

Distributed by: