

LED FIXTURE

TL Series

LED Emergency

TL-RMES101

"Running Man" LED Emergency Sign



Features & Benefits

- Injection-molded thermoplastic housing

- Easy installation

- Ni-cd battery backup for 90 minutes, AC only & 6-24V UDC (TL-RMES101-UDC)

- Universal (Wall, Ceiling, Side) mounting

- Super bright SMD LED

- 120/347VAC input voltage

- 3 Pictograms included, single/ double face

- cUL listed / IP20


- Test switch and charge indicator light

Warranty

- 2-year limited warranty in commercial use from the date of purchase

- Operating temperature range between -10°C and +40°C

Dimensional Drawing

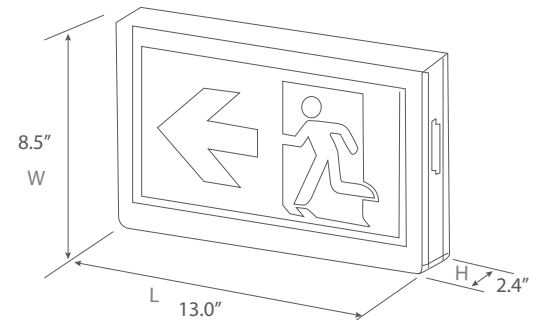

Arrow 2pcs



Without Arrow 1pc

Ordering Information Example: TL-RMES101

Family Name	Fixture Type	Model
TL (Turolight)	RMES ("Running Man" Emergency Sign)	101 (Emergency Sign) 101-UDC (Emergency Sign, AC only & 6-24V UDC)

Product Specification

Ordering Code	Model Number	Description	Wattage (W)	Input Voltage (V)	Mounting	Remote Capable	Self Powered Battery	Damp Location	Dimensions LxWxH (inch)	Case QTY.
3461114	TL-RMES101	"Running Man" LED Emergency Sign, White Housing	3W	120/347VAC	Wall, Ceiling, Side	No	Yes (90 minutes)	Yes	13.0" x 8.5" x 2.4"	6
3461116	TL-RMES101-UDC	"Running Man" LED Emergency Sign, White Housing AC only & 6-24V UDC	3W	120/347VAC	Wall, Ceiling, Side	Yes	NO	Yes	13.0" x 8.5" x 2.4"	6