



SOLAIS® LMR16 LED Lamp

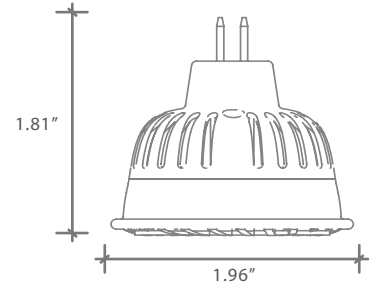

Solais LED MR16 Lamp Replacement




Product Description: The Solais LED MR16 lamp replacement has the high light output capability of halogen incandescent sources - resulting in a high-performance product perfect for commercial, museum, retail and hospitality applications.

Performance Summary: Halogen PAR form factor (ANSI-compliant) / Lightest LED lamps on the market / Certified to UL Standard 1993 / RoHS-compliant / Contains no lead or mercury

Applications: Designed for use in track & recessed fixtures.

Luxiance® Thermal Management Technology: Industry-leading thermal management system that incorporates active cooling, for superior light output and performance.



LMR16	/	25	/	30K	/	10W	/	500	/	GY
Form Factor		Beam Angle		CCT		Wattage		Lumen Output		Housing Color
MR16		25 Degrees		3000K		10 Watts		500 Lumens		Gray



Product Code	Lumen Output	Power (Watts)	CCT (K)	Beam Angle	CBCP (cd)	CRI	Power Factor	Base Type	Life (L70)	Weight (oz.)	Length (in.)	Diam. (in.)	Dimm.
LMR16/15/30K/10W/500	500	10	3000	15	4100	85	N/A	GU5.3	35,000	1.60	1.81	1.96	No
LMR16/25/30K/10W/500	500	10	3000	25	2550	85	N/A	GU5.3	35,000	1.60	1.81	1.96	No

WARNINGS: Use 12V MR16 with Class 2 circuits only / Do not use in outdoor fixtures / Do not use in fully enclosed fixtures / Not for use with dimmers / Do not use with emergency exit fixtures or with emergency lighting / Turn off power before changing lamp / May not be compatible with some electronic transformers / Test lamps before installation

CAUTION: Risk of electric shock / Use in dry location only

NOTES: This device complies with Part 18 of the FCC rule. This product may cause interference with other devices. If interference occurs, change the location of the products involved.

LIMITED WARRANTY: Turolight warrants that this lamp will operate for a period of three (3) years from the date of purchase when used in accordance with package and lamp directions. If this lamp does not last for three years, return this product to the place of purchase or visit turolight.com for warranty replacement procedures. You must include the original receipt/proof of purchase. Turolight will repair or replace your lamp. This limited warranty may not cover lamps subject to misuse, electrical current fluctuation, accident, neglect, or acts of God. THIS REPLACEMENT IS THE SOLE WARRANTY OBLIGATION OF TUROLIGHT AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. LIABILITY FOR INCIDENTAL AND CONSEQUENTIAL DAMAGES ARE EXCLUDED. Exclusion of incidental or consequential damages is not allowed by some provinces, so the above limitation or exclusion may not apply to you.