

LED FIXTURE

SSL Series



LED Full Cutoff Wall Pack SSL-WP3T

120-347V auto-sensing driver
Multiple wattage and multiple kelvin selection



5-year limited warranty

Operating temperature range -40° C ~ +40° C



Medium Size




Large Size

Features & Benefits

- cULus listed, DLC Premium
- 120-347V auto sensing driver, 0-10V dimming
- Switchable CCT (30K/40K/50K), switchable wattage
- 2 Fixture selection offers 18 possible solutions per fixture
- Die-cast aluminum with durable dark bronze coat finish
- Photocell sensor installed
- L70 @ 50,000 Hrs, CRI≥80
- IP 65, wet location rated

Dimensional Drawing

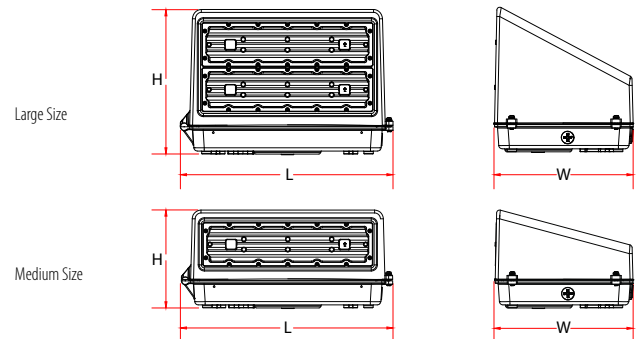

Ordering Information Example: SSL-WP3T/60M/MW/MK/120-347V/D/PC/DB

Family Name	Fixture Type	Type	Wattage	CCT	Voltage	Dimmable	Body	Finish
SSL (Solid state lighting)	WP3T (LED full cutoff wall pack)	60M (Max. 60W, medium size) 150L (Max. 150W, large size)	MW (Multi Wattage)	MK (Multi Kelvin/CCT)	120-347V	D (Dimmable)	PC (Polycarbonate)	DB (Dark bronze)

Product Specification

Ordering Code	DLC Premium	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Wet Location	Dimension L×W×H (inch)	Case QTY.
3680302	Y	SSL-WP3T/60M/MW/MK/120-347V/D/PC/DB	60-40-25	120-347V	50,000	7800-5200-3250	30-40-50	≥80	Yes	14.17"×9.29"×6.54"	1
3680303	Y	SSL-WP3T/150L/MW/MK/120-347V/D/PC/DB	150-120-90	120-347V	50,000	18400-15600-11700	30-40-50	≥80	Yes	14.17"×9.29"×9.65"	1