

LED FIXTURE

PRO Series



LED Eco-Commercial Strip PRO-EC

Linear 4' LED strip light, 120-347V auto-sensing driver
Selectable Kelvin (CCT)



5-year limited warranty


Operating temperature range -20 °C ~ +50 °C



Features & Benefits

- cULus listed, DLC
- Selectable Kelvin (CCT), 4' length
- 120-347V Auto-sensing driver, 0-10V dimming
- L70 @ 54,000 Hrs, CRI ≥80
- White metal finish, polymer diffusing lens
- Wall and surface mounting
- Damp location rated

Dimensional Drawing

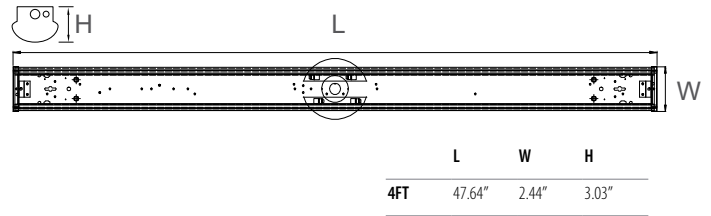

Ordering Information Example: PRO-EC/4F/35W/MK/120-347V/D


Family Name	Fixture Type	Size	Wattage	CCT	Voltage	Dimmable
PRO	EC (LED Eco-Commercial)	4F (4')	35W	MK (Selectable CCT)	120-347V	D (0-10V dimmable)

Product Specification

Ordering Code	DLC	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating (L70)	Beam Angle	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Damp Location	M.O.L (inch)	Case QTY.
3665317	Yes	PRO-EC/4F/35W/MK/120-347V/D	35	120-347V	54,000	120°	4550	35-40-50	>80	Yes	48	6
3660214	-	PRO-EC/MTG/H-C/KIT	Hook and chain mounting kit, includes, 2 x 5" hooks and 2 x 1.05m length of link chain and 2 x hooked wood screws									
3660215	-	PRO-EC/RMJP	Row mounting joining plate, white									
3660216	-	PRO-EC/JBCP	J-Box cover plate, white									



PRO-EC/MTG/H-C/KIT



PRO-EC/RMJP



PRO-EC/JBCP