



Project:			
Ordering info:			
Submitted by:		Date:	



Astella Track System
AST-TRK (H-type, single circuit)

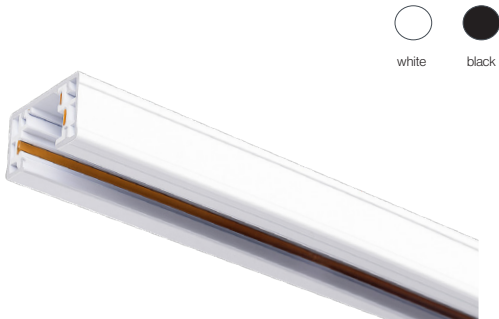

	L	W	H
4 FT	48" 1219mm	13/8" 34.4mm	11/16" 17.5mm
6 FT	72" 1829mm	13/8" 34.4mm	11/16" 17.5mm
8 FT	96" 2438mm	13/8" 34.4mm	11/16" 17.5mm

Description

Seamless Framework. Infinite Configuration. A complete H-type track solution available in multiple lengths and connector options, Astella (AST) empowers designers to create continuous, seamless lighting compositions with dependable performance and design flexibility.

Specifications

- H-type single circuit, 20A, 120V, 60Hz
- Lengths: 4 ft / 6 ft / 8 ft / 12 ft (2ft make to order)
- Seamless framework with low-profile size: 13/8" W × 11/16" H
- Aluminum extrusion with consistent 1/32" wall thickness
- 12-gauge flat copper conductor wiring
- UL certified, 5 years warranty

Features

- 6063 Aluminum alloy at consistent of 1/32" wall thickness, provides superior dimensional precision and strength.
- 12-gauge flat copper wire provides consistent conductivity across any run length, enables even brightness across the whole layout without dimming or flickering.
- High performance PC housing holds geometry for life through years of thermal cycling. Fire-safe. Heat-stable. Halogen-free. No Yellowing or embrittlement
- Paper tube packaging protects full-length tracks without bending, warping, scratching during transport and storage.

Ordering Guide Example: AST-TRK-H-04-WH

AST-TRK							
Family Name		Shape		Length*		Finishes	
AST-TRK	Astella Track System	H	H-type	04	4 ft	WH	White
				06	6 ft	BK	Black
				08	8 ft		
				12	12 ft		
						*2 ft, made to order	

Ordering Guide Example: AST-TRK-H-MJ-WH


AST-TRK-H					
Accessories				Finishes	
LEC	Live End Connector	WH	White		
FC	Flexible Connector	BK	Black		
SC	Straight Connector				
LC	L Connector				
TC	T Connector				
XC	X Connector				
MJ	Mini Joiner				
FCNP	Floating Canopy				
EC	End Cup				

Project:			
Ordering info:			
Submitted by:		Date:	




Accessories


AST-TRK/H/LEC Live End Connector




AST-TRK/H/FC Flexible Connector

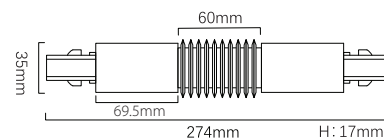


AST-TRK/H/SC Straight Connector




AST-TRK/H/LC L Connector




AST-TRK/H/TC T Connector




AST-TRK/H/XC X Connector




AST-TRK/H/MJ Mini Joiner



AST-TRK/H/FCNP Floating Canopy

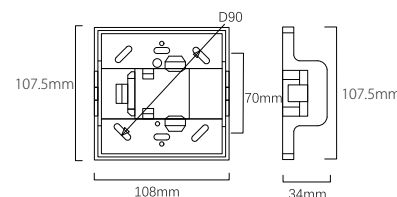



AST-TRK/H/EC End Cup



Project:			
Ordering info:			
Submitted by:		Date:	



Compatible with Astella LED Track Head (**AST-TRH-H**)

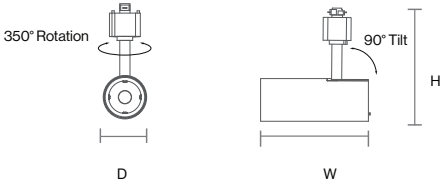

	D	W	H
10W	2.16" 55mm	5.51" 140mm	5.74" 146mm
20W	2.91" 74mm	6.24" 158mm	6.12" 155mm
35W	3.54" 90mm	8.50" 216mm	7.48" 190mm

Model Information

Ordering Code	Model Number	Wattage	Max. Lumens	Efficacy (lm/W)	CCT	Beam Angle*	Voltage	CRI	Dimmable	DLC
5220001	AST-TRH-H-10W-MK5-120-D-MF-WH	10	1050	100	27/30/35/40/50	36	120	90+	TRIAC/ELV	Yes
5220004	AST-TRH-H-10W-MK5-120-D-MF-BK	10	1050	100	27/30/35/40/50	36	120	90+	TRIAC/ELV	Yes
5220002	AST-TRH-H-20W-MK5-120-D-MF-WH	20	2060	100	27/30/35/40/50	36	120	90+	TRIAC/ELV	Yes
5220005	AST-TRH-H-20W-MK5-120-D-MF-BK	20	2060	100	27/30/35/40/50	36	120	90+	TRIAC/ELV	Yes
5220003	AST-TRH-H-35W-MK5-120-D-MF-WH	35	3500	100	27/30/35/40/50	36	120	90+	TRIAC/ELV	Yes
5220006	AST-TRH-H-35W-MK5-120-D-MF-BK	35	3500	100	27/30/35/40/50	36	120	90+	TRIAC/ELV	Yes

*Optional accessory lenses available: 15°, 24°, 55°