

Installation Instruction

NEBULUM 4" Cylinder Fixture – Wall Mount installation

Applicable models:
NBLM4-CYL-W-D1-UN3-MW-xxK-90-xx-xx-xx-xx

ELECTRICAL SHOCK HAZARD



WARNING


Disconnect the Electrical supply at the service panel (fuse or circuit breaker box). Failure to do so could result in serious injury.

Only qualified electricians should install this luminaire and Must conform to the Canadian Electrical Code Part 1 or the NEC, and any local codes and ordinances. Ensure that only proper tools and materials to complete the installation are available prior to attempting to install this luminaire.

Read all instructions prior to installing this product.


This unit is intended to be installed as either a Surface mount or Pendant mount depending on selected version.

Follow directions closely. Wattage selection for MW units is located inside the main cylinder housing compartment.

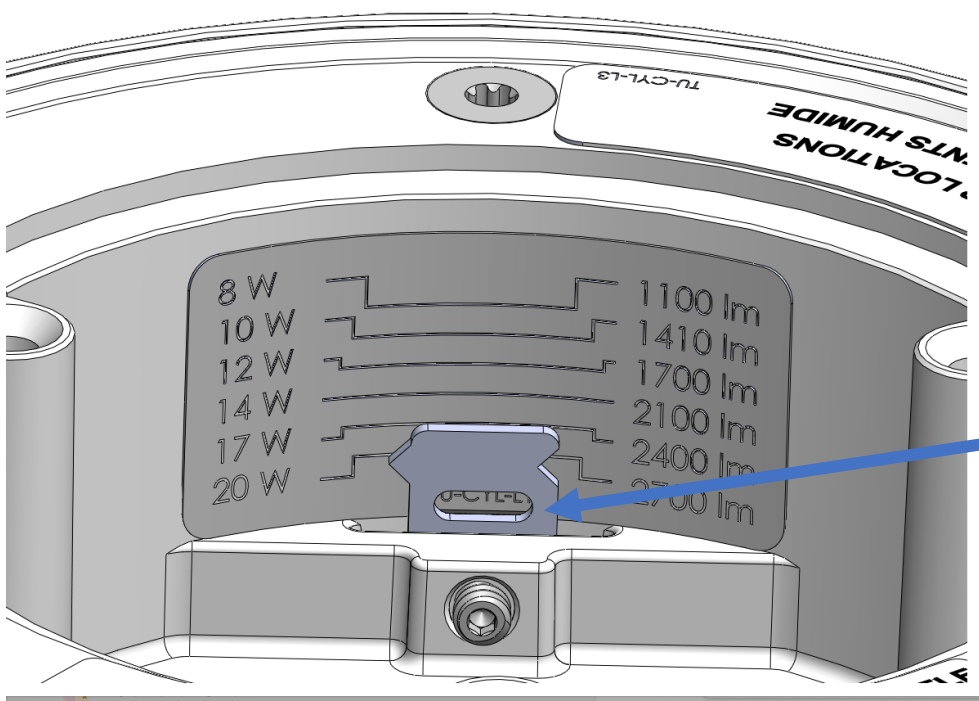

Loosen locking set screw, Insert a small screwdriver into the slot a adjust to selected output wattage.

BLACK	HOT
WHITE	NEUTRAL
GREEN	GROUND
PURPLE	DIM (+) 0-10V
PINK	DIM (-) 0-10V

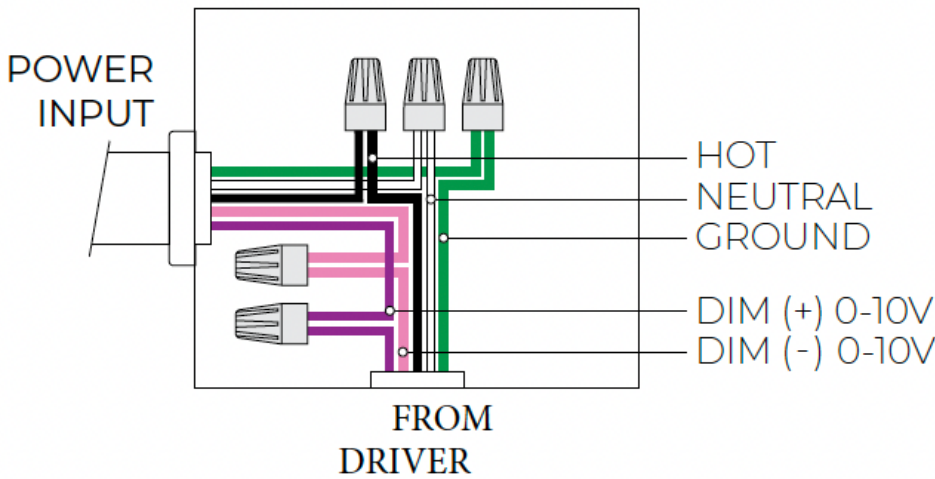


Nebulum 4 Cylinder Fixtures - Wall Mount installation

NBLM4-CYL-W-D1-UN3-MW-xxK-90-xx-xx-xx-xx


Installation Steps:

1. Remove the mounting plate from the back of the Wall mount unit by loosening the retaining set screw and attach to the octagon box.

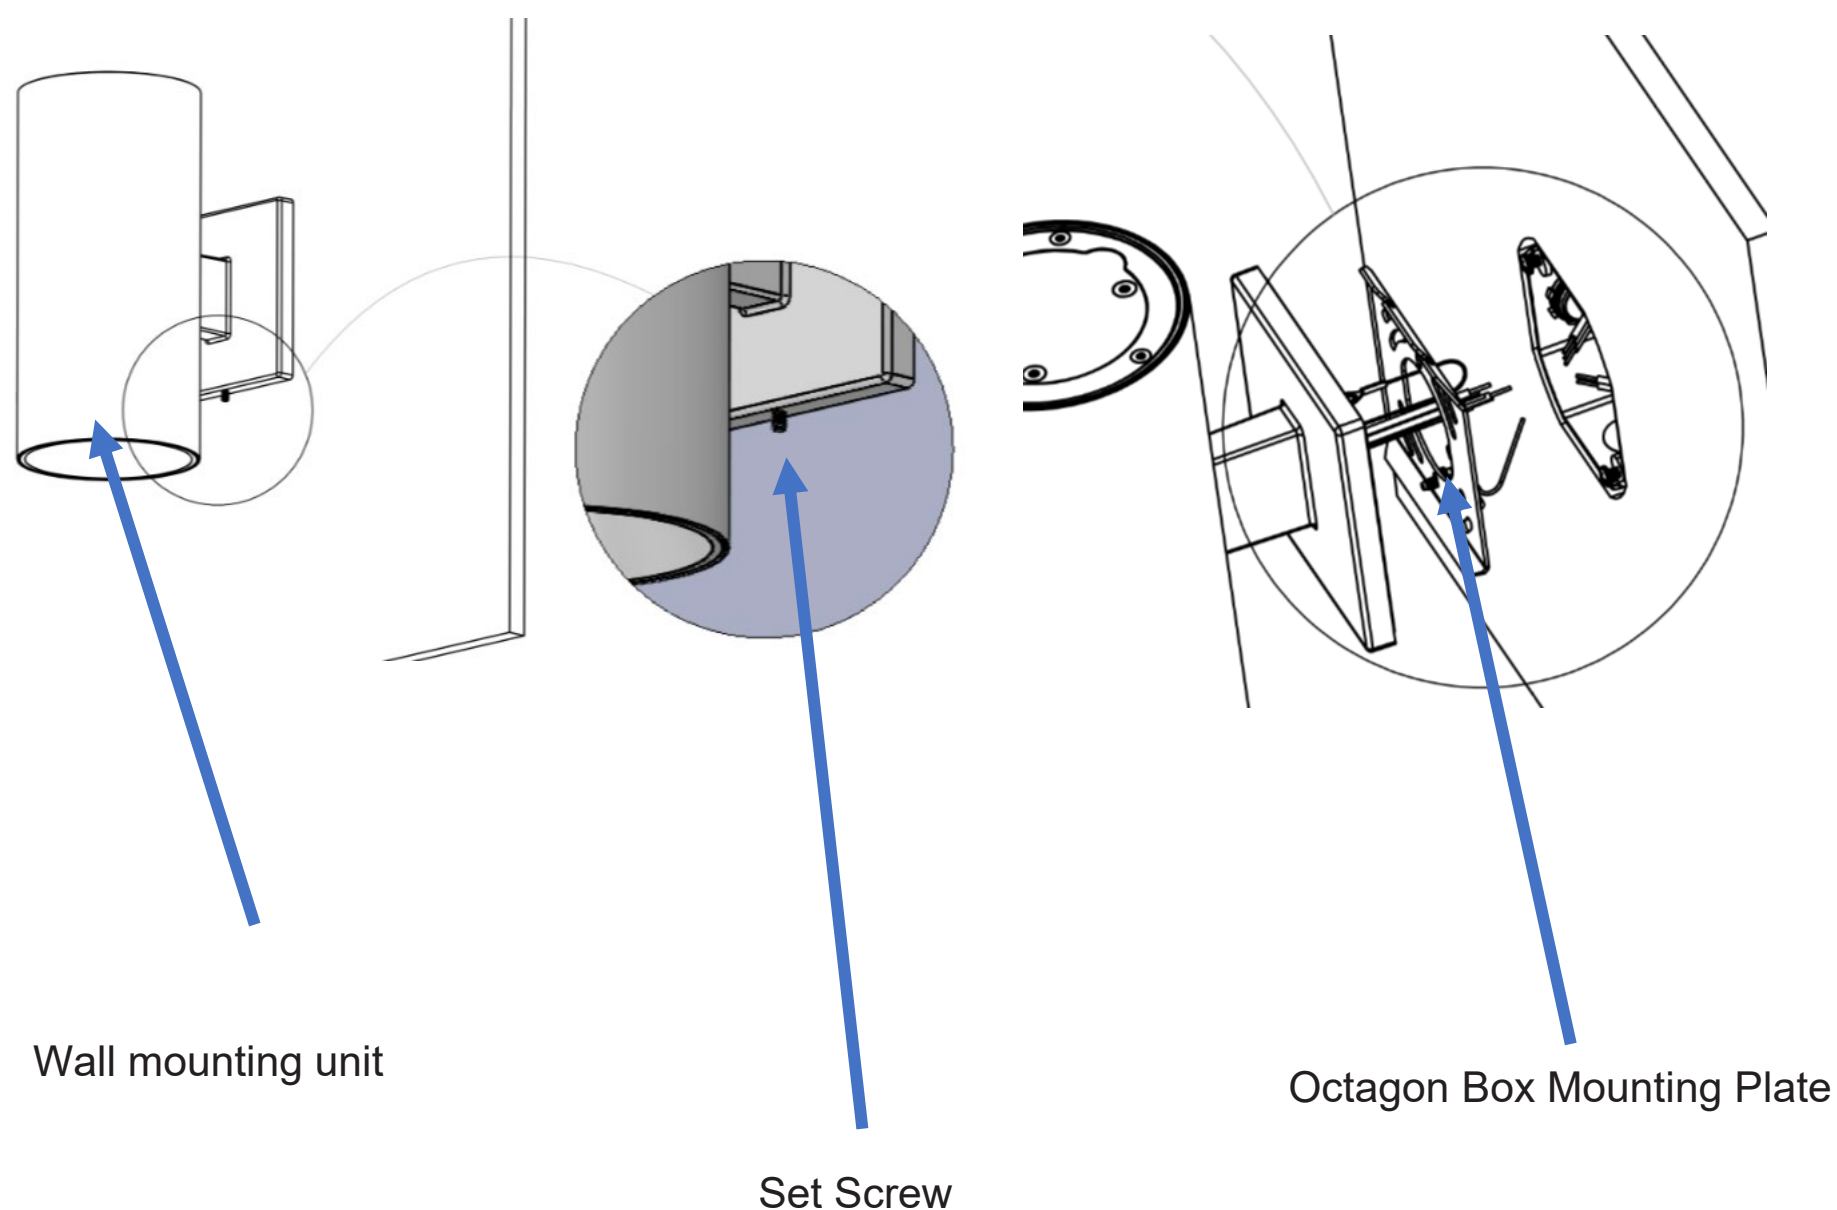

2. Attach safety lanyard to mounting plate. For easier connections bring wires through large hole and make wiring connections using wire nuts provided. Dress wires back into junction box.

3. Hook wall mount onto the top of the bracket.

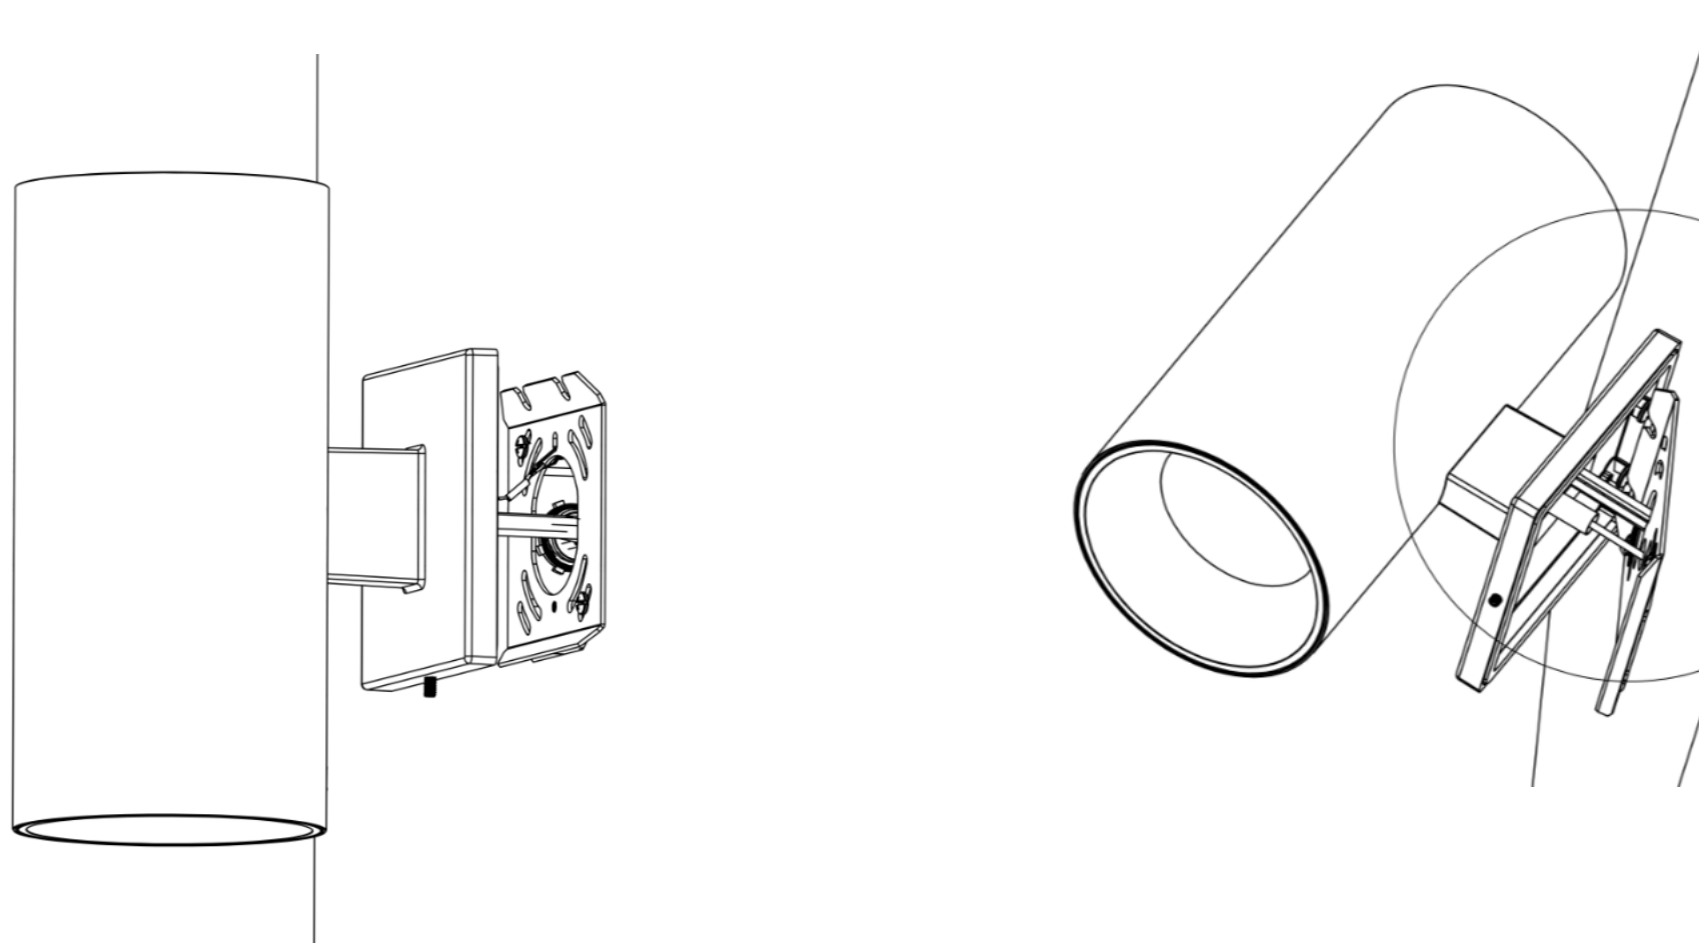

Nebulum 4 Cylinder Fixtures - Wall Mount installation NBLM4-CYL-W-D1-UN3-MW-xxK-90-xx-xx-xx-xx

4. Swing unit down onto wall and tighten the set screw

