

LED FIXTURE

PRO Series



LED Strip Light PRO-EC2

Linear 4' LED strip light, 120-347V auto-sensing driver with 0-10V dimming
Selectable Kelvin (CCT) & Selectable Wattage



5-year limited warranty


Operating temperature range -20 °C ~ +50 °C



Features & Benefits

- cULus listed
- Selectable Kelvin (CCT) & Selectable Wattage, 4' length
- 120-347V Auto-sensing driver, 0-10V dimming
- L70 @ 50,000 Hrs, CRI ≥80
- White metal finish, polymer diffusing lens
- Wall and surface mounting
- Damp location rated

Dimensional Drawing

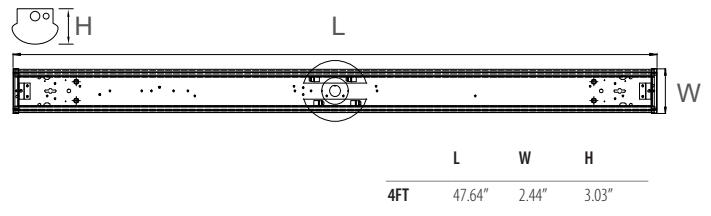

Ordering Information Example: PRO-EC2/4FM/MW/MK/120-347V/D

Family Name	Fixture Type	Size	Wattage	CCT	Voltage	Dimmable
PRO	EC2 (LED Eco-Commercial)	4FM (4')	MW (Selectable Wattage)	MK (Selectable CCT)	120-347V	D (0-10V dimming)

Product Specification

Ordering Code	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating (L70)	Beam Angle	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Damp Location	M.O.L (inch)	Case QTY.
3680353	PRO-EC2/4FM/MW/MK/120-347V/D	38-35-30	120-347V	50,000	120°	5000-4550-3900	35-40-50	>80	Yes	48	6
3660214	PRO-EC/MTG/H-C/KIT	Hook and chain mounting kit, includes, 2 x 1/8" hooks and 2 x 1.05m length of link chain and 2 x hooked wood screws									



PRO-EC/MTG/H-C/KIT