


Installation Instruction

Applicable models:
RGD-UNL

Unit Number Light

Safety Notes


- Product should be installed and serviced in accordance with applicable national, state, and local building and electrical codes.
- To reduce the risk of electric shock, ensure that the main power source and circuit breakers are switched off before performing any installation or wiring procedures.
- Avoid looking directly into lamp when illuminated.
- Ensure all mounts are securely attached and will support the weight of the fixture. Failure to properly support fixture may result in damage or injury, for which the manufacturer does not assume responsibility.
- There are no serviceable parts inside this fixture. Do not attempt to dismantle or service this fixture in any way. If LEDs or protective lens cover are damaged, the fixture must be replaced.
- Not intended for recess mounting in any type of installation.
- Use minimum 18 AWG coated wire for supply leads.

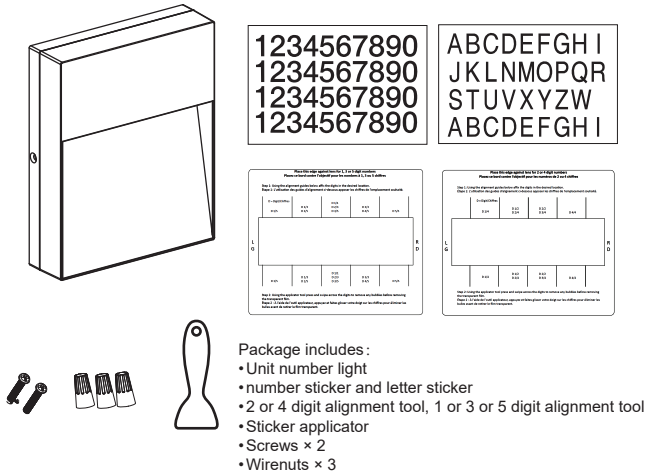


Installation Steps

1. Start by applying the number/letter stickers using the included alignment tools for quick and accurate positioning. Use the applicator to firmly press the number/letter, then peel off the top transfer film.
2. Turn off breaker to remove supply power from circuit.
3. Attach and screw the provided mounting plate to junction box.
4. Select the CCT needed.
5. Connect wires, BK to BK, WH to WH, GREEN to GREEN.
6. Place the fixture over the mounting plate, aligning the two mounting screw holes on the plate with the two screw holes on the fixture, and secure using the provided hardware.
Note: To ensure a weatherproof seal, use silicone sealant around the base of the light where it meets the mounting surface.
7. Restore supply power.

5.

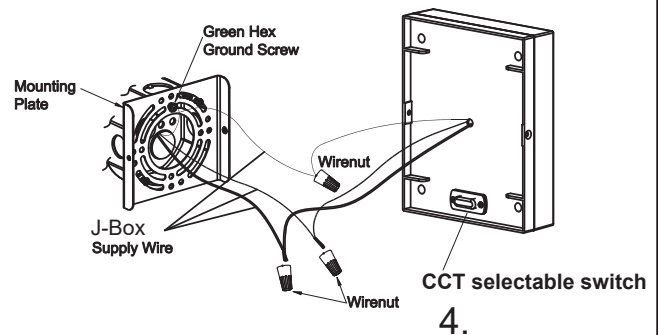

6.

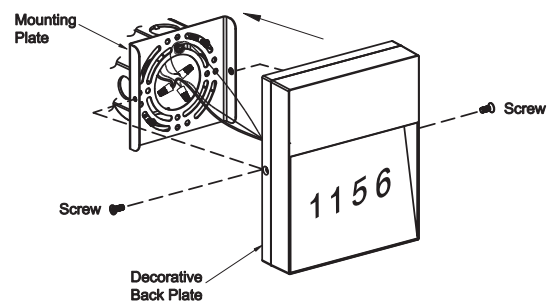

2 & 3.

